

integral solutions

ALUMINIUM  
PVC

# archi tecture

# CONTEMPORARY ENCLOSURES



Aluminium and PVC  
for architecture

INDEX

15



HINGED

- 16 Cor 80 Industrial Passivhaus
- 17 Cor 80 Industrial
- 20 Cor 70 Industrial
- 22 Cor 80 Hidden Sash
- 24 Cor 70 Hidden Sash
- 26 Cor 70 OC
- 30 Alu-Steel
- 32 Cor 60
- 34 Cor 60 Hidden Sash
- 35 Cor 3500
- 36 Cor 3000
- 38 Cor 2000
- 39 Cor 2300
- 40 Cor 70 C16 ST
- 42 Cor 70 Evolution
- 46 Cor 70 Hidden Sash C16 ST
- 48 Cor 3500 C16 ST
- 50 Cor Urban C16
- 52 Cor Galicia Premium C16
- 54 Casement

57

DOORS

- 58 Millennium Plus 80 Door
- 59 Millennium Plus 70 Door
- 62 Millennium Plus Pivot Door
- 64 Panelled Door
- 66 Millennium 2000 Door
- 68 Millennium Sliding Automatic Door
- 70 Bi-Fold
- 71 Bi-Fold Plus

75

SLIDING

- 76 Cor Vision Plus
- 80 Cor Vision Evolution
- 82 Cor Vision
- 84 4600 Plus Lift & Slide
- 86 4700 In-line Slider / Lift & Slide
- 88 4900 HI Sliding
- 90 4200 Sliding
- 92 5000 Double Sliding
- 93 5000 Sliding / Integral Sliding
- 94 Mediterranean Balcony
- 96 2000 Perimetral Sliding
- 97 6200 Sliding
- 98 6500 Sliding
- 99 6500 Plus Sliding

103

PVC

- 104 A 84 Passivhaus HI
- 105 A 84 Passivhaus 1.0 Thermally broken
- A 84 Passivhaus 1.0
- 106 A 84 Hinged
- 109 A 84 Hidden Sash Passivhaus
- A 84 Hidden Sash
- 110 A 78 Hinged
- A 78 Passivhaus 1.0 Hinged
- 112 A 70 Hinged
- 116 Alcover
- 118 C 70 Sliding
- 120 E 170 Lift & Slide
- 124 Cortizo Isolation Roller Shutter Box
- 126 Cassonetto Renovation Shutter Box

127

FAÇADE SYSTEMS

- 129 Engineering for Building Envelopes
- 130 Modular Façade
- 132 Light Façades
- 133 Stick 62 Façades
- 137 TP 52 Façade
- 138 SG 52 Façade
- 141 TPH 52 Façade
- 142 TPV 52 Façade
- 144 ST 52 Façade
- 145 SST 52 Façade
- 149 Equity Façade
- 150 Skylight - Veranda
- 152 Sliding Roof

155

SMOKE AND FIRE PROTECTION

- 157 Millennium FR Door
- 158 SHEV

161

CLADDINGS

- 163 Cladding Pro

165

INTERIOR DIVISIONS

- 167 PW 80 Office Partition Wall

169

SOLAR PROTECTION

- 170 Solar Protection Louvres
- 171 Decorative Lattices & Louvres
- 174 Tamiz
- 175 Mallorquina


179

BALUSTRADE

- 180 View Crystal Balustrade
- View Crystal Plus Balustrade
- 182 Classic Balustrade
- 184 Juliet Balcony

187

ACCESSORIES

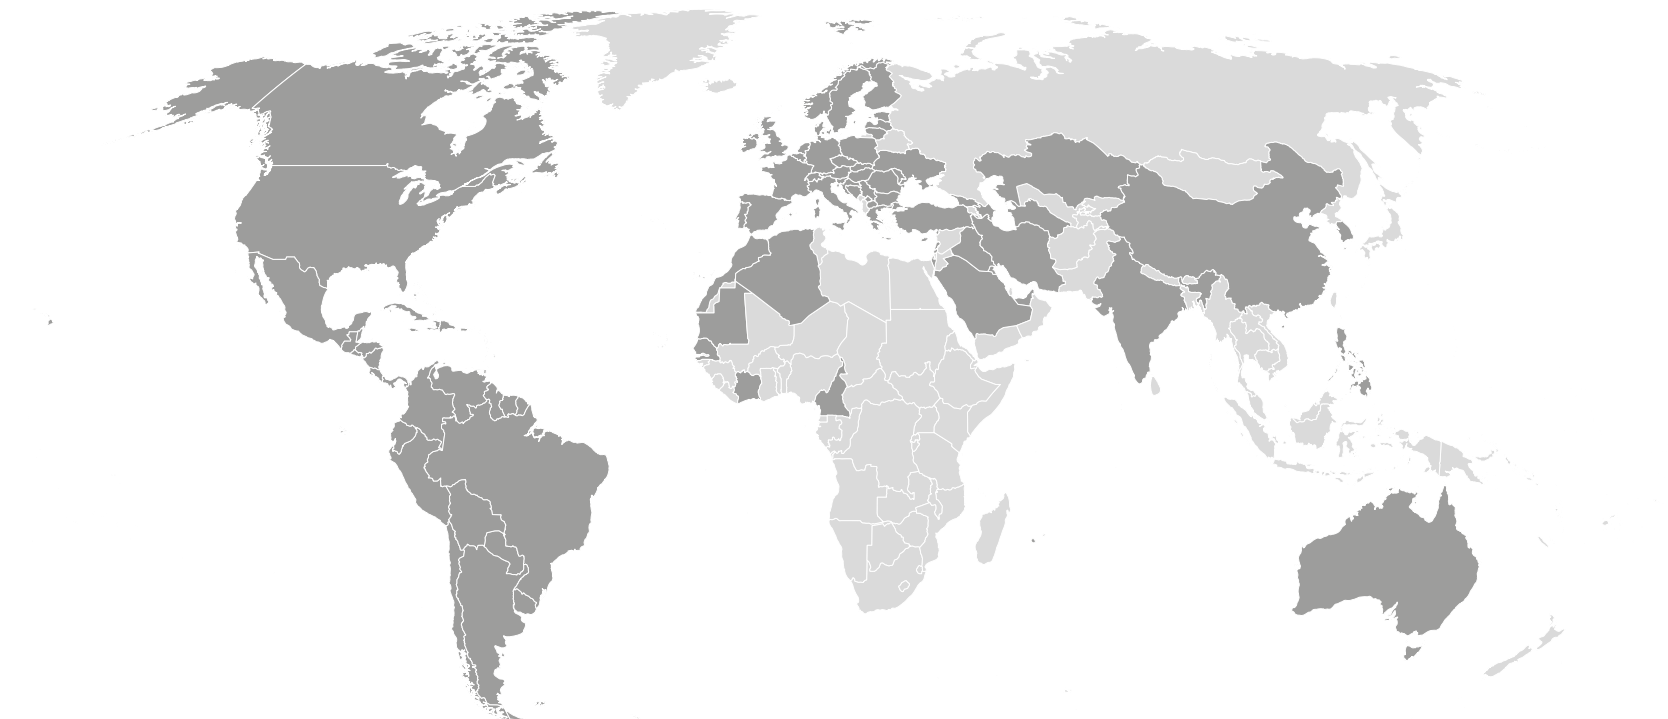

# CORTIZO

## GLOBAL PRODUCTION CAPACITY



CORTIZO, an international leader in the design and manufacture of aluminium and PVC. Our production capacity consists of 150,000 t of aluminium and 45,000 t of PVC. This enables us to meet the requirements of our customers across more than 80 countries in which we are currently present.



U value chart



ALUMINIUM

SYSTEM	Uf W/m²K	Uw W/m²K
Cor 80 Industrial Passivhaus	0.94	From 0.66
Cor 80 Industrial	1.1	From 0.71
Cor 80 Hidden Sash	1.2	From 0.71
Cor 70 Industrial	1.3	From 0.76
Cor 70 Hidden Sash	1.4	From 0.84
Alu-Steel	1.5	From 0.83
Bi-Fold Plus	1.7	From 0.78
Millennium Plus 80 Door	1.7	From 0.8
Cor 70 C16 ST	1.7	From 0.9
Cor 70 Evolution	1.7	From 0.81
Cor 70 OC	1.7	From 0.85
4600 Plus Lift & Slide	1.8	From 0.65
Cor 70 Hidden Sash C16 ST	1.8	From 0.93
Cor Galicia Premium C16	2.1	From 1.1
Cor 3500 Hinged	2.3	From 1.0
Cor Urban C16	2.3	From 1.2
Millennium FR Door	2.4	From 1.4
Millennium Plus 70 Door	2.5	From 0.9
Cor 3500 C 16 ST	2.7	From 1.2
Casement	2.7	From 0.9

Consult typology, dimensions and glazing.  
Consult transmittance of different joints.

SYSTEM	Uf W/m²K	Uw W/m²K
4900 HI Sliding	2.7	From 1.2
Cor 60 Hinged	2.8	From 1.0
Bi-Fold	2.8	From 0.97
Cor Vision Evolution	3.2	From 0.88
4700 In-line Slider / Lift & Slide	3.4	From 1.0
Cor 3000 Hinged	3.4	From 1.3
Cor 60 Hidden Sash Hinged	3.6	From 1.5
Cor Vision Plus Sliding	3.8	From 0.9
Cor Vision Sliding	3.9	From 1.3
4200 Sliding	4.0	From 1.5
5000 Double Sliding	4.0	From 1.3
Cor 2000 Hinged	5.7	From 1.8
Cor 2300 Hinged	5.7	From 2.0
6200 Sliding	5.7	From 3.2
Millennium 2000 Door	5.7	From 2.3
Mediterranean Balcony	5.7	From 2.1
2000 Perimetral Sliding	5.7	From 2.9
5000 Sliding	5.7	From 2.3
6500 Sliding	5.7	From 2.2
6500 Plus Sliding	5.7	From 2.0

// Completed projects



\_ Halletts Point  
New York, **USA**

PVC

SYSTEM	Uf W/m²K	Uw W/m²K
A 84 Passivhaus HI Hinged	0.76	From 0.66
A 78 Passivhaus 1.0 Hinged	1.00	From 0.74
A 84 Passivhaus 1.0 Reduced Reinforcement Hinged	1.00	From 0.74
A 84 Passivhaus 1.0 Hinged	1.01	From 0.74
A 84 Hidden Sash Passivhaus	1.05	From 0.71
A 84 Hidden Sash	1.11	From 0.74
A 84 Hinged	1.16	From 0.79
A 78 Hinged	1.20	From 0.80
A 70 Hinged	1.3	From 0.9
C 70 Sliding	1.8	From 1.3
E 170 Lift & Slide	1.6	From 0.9

Consult typology, dimensions and glazing.  
Consult transmittance of different joints.

CORTIZO ISOLATION	U <sub>SB</sub> SHUTTER BOX
Roller Shutter box 200 mm	0.66 (W/m²K)
Roller Shutter box 160 mm	0.97 (W/m²K)



\_ Pilatus Tower  
Switzerland



\_ World Trade Center Santo Domingo  
Dominican Republic



\_ Cambridge  
USA

investigation, advancement and quality



CORTIZO IS QUALITY

The quality of all CORTIZO products is based on the strict tests carried out in official, national and international laboratories, as well as by our technical staff in our own test benches.

R+D

Design, innovation and quality are the protagonists in the more than 80 window, door, façade, composite panel, balustrade and solar protection systems designed by our R&D department. CORTIZO enclosures adapt to the climate and construction particularities of thousands of projects around the world. Single-family and collective housing, hospitals and health centres, hotels, administrative buildings, infrastructures, sports centres, commercial and industrial spaces, social and cultural centres...

The adequate selection of raw materials and the control of all parameters that influence the extrusion process, backed by the ISO 9001 international certification, guarantee the quality of the extruded material. Additionally, the meticulous work in the execution of the surface treatments has allowed us to obtain the most demanding European quality certificates, such as QUALICOAT, QUALIDECO and QUALICOAT SEA SIDE for the laquering process, and the EWWA-EURAS for the anodizing process.







## CORTIZO LAB

The Cortizo LAB software allows for the immediate production of calculations, test results and classifications of all enclosure systems designed by CORTIZO and tested in its Technological Centre, for any dimension, typology and glazing (windows, doors, double joinery, façades, roofs and louvres).

**Thermal performance**

**Acoustic performances**

**AEV Tests:**

- Window and door systems: EN 12207 / EN 12208 / EN 12210

- Façades: EN 12152 / EN 12154 / EN 13116

**Microventilation**

**Mechanical Calculations**

**Calculation and production of wind and snow load reports**

## CORTIZO BIM

Virtual management of enclosure designs

**BIM training**

**Personalized assistance**

**BIM customized solution designs**

Founded on the 3D reproduction of each of the structural elements that make up a building, this technology allows for a more quick and comprehensive parametric design of the projects, offering digital replicas of our enclosure systems. The BIM library incorporates intelligent objects that implicitly carry all the technical, thermal, acoustic and mechanical information, virtually reproducing their behaviour in reality.



## TSAC NETWORK

Personalised technical assistance to architecture professionals in their own geographic working area is a differentiating fact of the CORTIZO spirit. For this purpose, we have a network of 22 Proximity Architecture and Engineering Departments strategically located in different areas in Europe and America.

**Finite Element Method for Structural Computation**

**Documents of compliance with regulations and standards**

**Official tests and certifications from the CORTIZO Technology Centre**

**Design and assessment of customised profiles for each project**

**Resolution of details and meeting on site**

**BIM comprehensive assistance**



\_Santander Bank Headquarters  
Spain

// Completed projects



## CORTIZO ECOEFFICIENT

Aluminium life cycle “cradle to cradle”.  
Via its two foundries, CORTIZO RECYCLING transforms aluminium waste into raw material for the extrusion of profiles, thus closing the cycle of a 100% reusable material.  
More than 2400 pick-up points of aluminium scrap in Europe.  
Low energy consumption in recycling (only 5% compared to primary consumption).  
Officially certified purifying stations



Green building consultation  
[greenbuilding@cortizo.com](mailto:greenbuilding@cortizo.com)

contemporary  
enclosures








**hinged** window and door systems




# COR 80

## Industrial Passivhaus

Certified for the warm-temperate category, this system offers exceptional thermal insulation thanks to its special foams on the frame and sash. With a transmittance value  $U_w$  from just  $0.66 \text{ W/m}^2\text{K}$ , it is an ideal solution for buildings with low energy consumption.

FEATURES		
Transmittance		$U_w \geq 0.66 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1950
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes

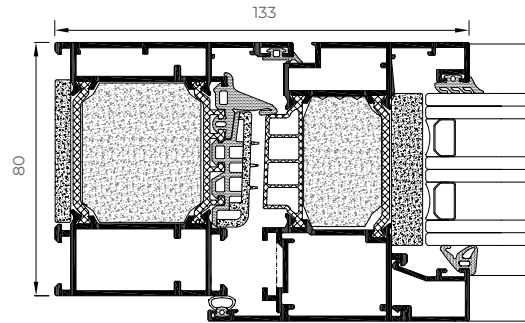

European Groove  
Thermally broken



### POSSIBILITIES




SECURITY  
HARDWARE



CONCEALED  
HINGES

### OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Parallel Sliding  
Bottom hung



### Sightlines

Frame 80 mm, Sash 88 mm

### Profile Thickness

1.6 mm

### Polyamide Strip Length

45 mm

### Glazing

Max. 65 mm, Min. 16 mm


### Maximum Sash Dimensions

Width (L) 1500 mm, Height (H) 2600 mm

### Maximum Sash Weight

160 kg

Consult maximum weight and dimensions according to typologies.

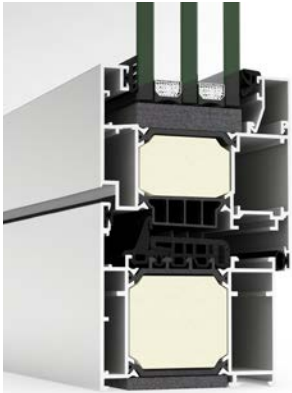







Aesthetic possibilities:

Sash: Straight / Glazing bead: Straight or curved

# COR 80

## Industrial

With a 80 mm frame depth, the COR 80 Industrial series responds to the most severe climatic requirements thanks to its thermal break with 45 mm tubular polyamide strips and the incorporation of reticulated polyolefin both around the glass and between the frame and sash.

FEATURES		
Transmittance		$U_w \geq 0.71 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1950
Wind resistance		Class C5
Burglar resistance		Grade RC2 (WK2)

Reference test 1.23 x 1.48 m / 2 sashes



### Sightlines

Frame 80 mm, Sash 88 mm

### Profile Thickness

1.5 mm

### Polyamide Strip Length

45 mm

### Glazing

Max. 73 mm, Min. 16 mm


### Maximum Sash Dimensions

Width (L) 1500 mm, Height (H) 2600 mm

### Maximum Sash Weight

160 kg

Consult maximum weight and dimensions according to typologies.

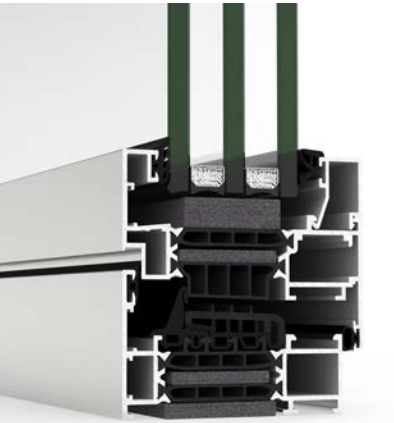

Aesthetic possibilities:

Sash: Straight / Bead: Straight or curved

### POSSIBILITIES



SECURITY  
HARDWARE



CONCEALED  
HINGES



CONCEALED  
DRAINAGE




ACCESSIBILITY



INTEGRATED  
ROLLER BLIND

### OPENING POSSIBILITIES

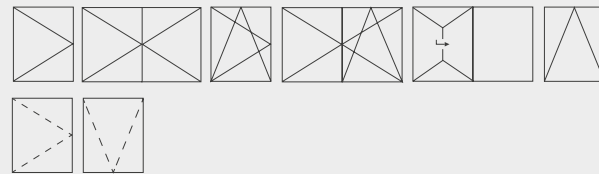


Inward Opening

Side hung  
Tilt & turn  
Parallel Sliding  
Bottom hung

Outward Opening

Side hung  
Top hung

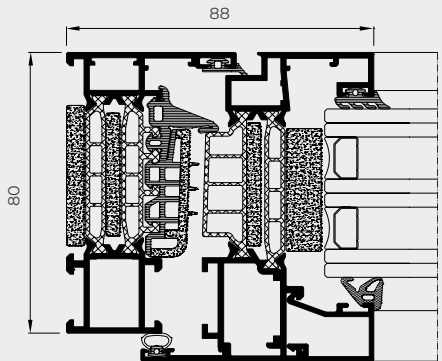



COR 80 INDUSTRIAL



COR 80 INDUSTRIAL  
ROLLER BLIND INTEGRATED INTO GLAZING BEAD

## ROLLER BLIND INTEGRATED INTO GLAZING BEAD

The new glass roller blind solution for the COR 80 and 70 Industrial is completely integrated into the window thanks to the design of a top glazing bead that fully conceals the rolling system and driving motor. In addition, the special lateral glazing beads act as guides, ensuring that the roller blind remains flush with the window, even during the opening and closing manoeuvres of the sash.

Available for **COR 80 and 70 Industrial systems**

**Aesthetic uniformity**

**Total integration** into the window, allowing for complete darkening of spaces with opaque roller blinds









**Smooth sliding** without wobbling during opening and closing manoeuvres

Compatible with **automated home systems**.

# COR 70

## Industrial

This 70 mm frame depth hinged system offers great thermal and acoustic performance combined with very simple fabrication, which is why it has become one of the most requested series for aluminium windows, doors and balconies.

FEATURES		
Transmittance		Uw ≥ 0.76 (W/m²K)
Acoustic insulation		Rw up to 44 dB
Air permeability		Class 4
Watertightness		Class E1800
Wind resistance		Class C5
Burglar resistance		Grade RC2 (WK2)
Standard AAMA Test		Class AW-PG60 *
Security test		Passed

Reference test 1.23 x 1.48 m / 2 sashes  
Security test: Reference test 1.100 x 2.400 m / 1 sash  
Burglar test 1.47 x 2.52 m / 1 sash with EVO SECURITY hardware  
CSTB Laboratory DTA Certification  
\*Standard AAMA Test: Class AW-PG60 1502 x 2502 - FW / Reference test fixed 1.50 x 2.50 m

### OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Parallel Sliding  
Tily only

### POSSIBILITIES



Outward Opening

Side hung  
Top hung  
Pivoting on horizontal or vertical axis



SECURITY HARDWARE



CONCEALED HINGES



INTEGRATED ROLLER BLIND



ACCESSIBILITY



CONCEALED DRAINAGE

European Groove  
Thermally broken

Cor 70 Industrial - Concealed drainage solution

Cor 70 Industrial - Half-Hidden Sash

## COR 70 INDUSTRIAL

**Sightlines**  
Frame 70 mm, Sash 78 mm

**Polyamide Strip Length**  
From 32 / 35 mm  
35 mm (Half-Hidden Sash)

**Profile Thickness**  
Window 1.5 mm  
Door 1.7 mm  
Window 1.9 mm (Half-Hidden Sash)

**Glazing**  
Max. 63 mm, Min. 6 mm  
Max. 40 mm, Min. 26 mm (Half-Hidden Sash)

**Maximum Sash Dimensions**  
Width (L) 1500 mm, Height (H) 2600 mm

**Half-Hidden Sash:**  
Width (L) 1300 mm, Height (H) 2400 mm  
Standard solution  
Width (L) 1200 mm, Height (H) 3500 mm  
HD Hinges (side hung)

**Maximum Sash Weight**  
160 kg

**Aesthetic possibilities:**  
Sash: Straight / Glazing bead: Straight or curved  
Consult maximum weight and dimensions according to typologies

20






21




# COR 80

## Hidden Sash

Elegant design with straight aesthetic in which the sash is concealed behind the frame, thus maximizing the glazed surface and the entry of light. In addition, it offers a great thermal and acoustic performance prompted by the 45 mm thermal break and a glazing capacity of up to 51 mm that allows the installation of triple glazing.

FEATURES		
Transmittance		$Uw \geq 0.71$ (W/m²K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1650
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes

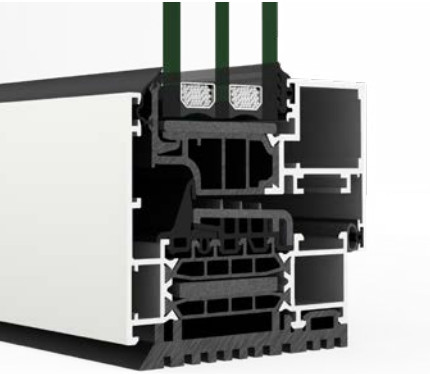

### Sightlines

Frame 80 mm, Sash 80 mm

### Polyamide Strip Length

45 mm

### Profile Thickness

Window 1.9 mm

### Glazing

Max. 51 mm, Min. 36 mm

### Maximum Sash Dimensions

#### Standard Solution:

Width (L) 1300 mm, Height (H) 2400 mm

#### HD Hinges (Side Hung):

Width (L) 1200 mm, Height (H) 3500 mm

### Maximum Sash Weight

160 kg

Consult maximum weight and dimensions according to typologies

European Groove

Thermally broken



First **invisible handle** on the market




Solution for hidden sash systems **COR 80 HS, COR 70 HS and COR 70 OC**

Dimensions: **27.5 mm (L) x 234 mm (H)**

Ergonomics, robustness and easy handling in opening and closing operations. Totally clean aesthetics that simulate a fixed element, when in fact, it is a side hung or tilt & turn opening.



ARCH  
**INVISIBLE**  
BY CORTIZO

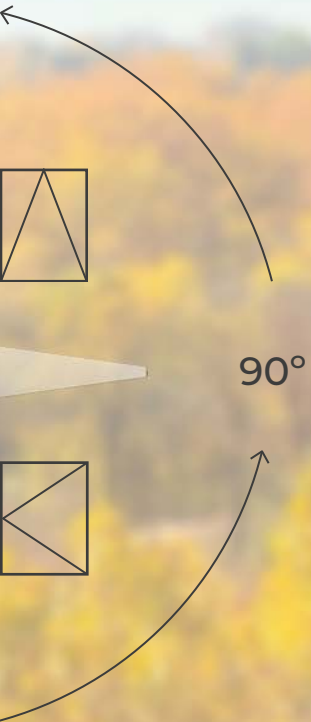

Exclusive handle integrated within the sash, **imperceptible from a frontal view.**

**Possibility of concealed hinges** that consolidates the aesthetic purity of the system.

### POSSIBILITIES



SECURITY  
HARDWARE



CONCEALED  
HINGES




CONCEALED  
HANDLE




CONCEALED  
DRAINAGE

### OPENING POSSIBILITIES

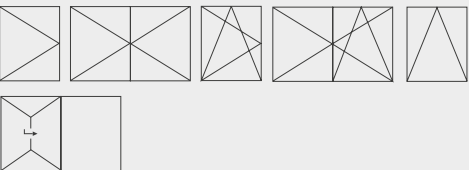

Inward Opening

Side hung  
Tilt & turn  
Bottom hung  
Parallel Sliding

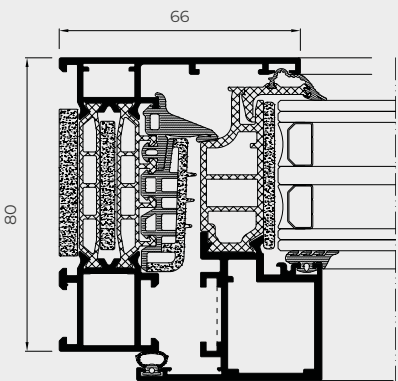

# COR 70

## Hidden Sash



It could be a painting, but is a window. This is how we can describe the COR 70 Hidden Sash which, like the 80 mm version, has a sightline of only 66 mm and allows the incorporation of the ARCH INVISIBLE handle, concealed hinges and the drainage solution. Any element that breaks the visual harmony of the ensemble is discarded.

FEATURES		
Transmittance		Uw ≥ 0.84 (W/m²K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1800
Wind resistance		Class C5
Security test		Passed

Reference test 1.23 x 1.48 m / 1 sash  
Security test: Reference test 1.100 x 2.400 m / 1 sash  
CSTB Laboratory DTA Certification

POSSIBILITIES

SECURITY HARDWARE

CONCEALED HINGES

CONCEALED HANDLE

CONCEALED DRAINAGE

OPENING POSSIBILITIES


Inward Opening

Side hung

Tilt & turn

Bottom hung

Parallel Sliding

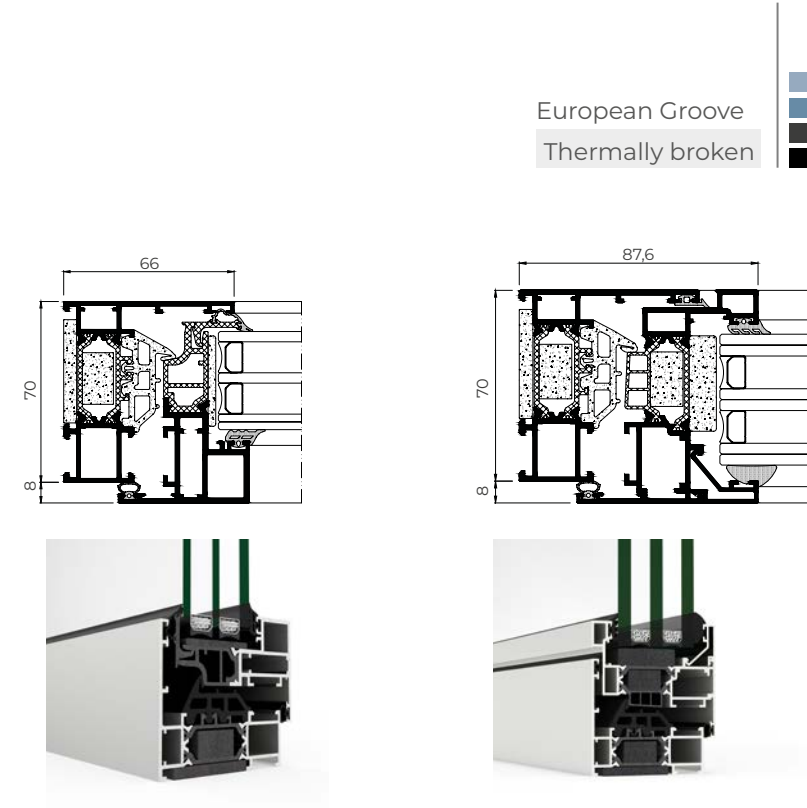

### COR 70 Hidden Sash Sightlines

Frame 70 mm, Sash 70 mm

**Polyamide Strip Length**  
35 mm

**Profile Thickness**  
Window 1,9 mm

**Glazing**  
Max. 40 mm, Min. 26 mm

**Maximum Sash Dimensions**  
Standard solution:

Width (L) 1300 mm, Height (H) 2400 mm

**HD Hardware (Side Hung):**  
Width (L) 1200 mm, Height (H) 3500 mm

**Maximum Sash Weight**  
160 kg

### COR 70 Hidden Sash - Half-Hidden Solution

**Sightlines**  
Frame 70 mm, Sash 78 mm

**Polyamide Strip Length**  
32-35 mm

**Profile Thickness**  
Window 1,5 mm

**Glazing**  
Max. 55 mm, Min. 26 mm

**Maximum Sash Dimensions**  
Width (L) 1000 mm  
Height (H) 1700 mm


**Maximum Sash Weight**  
160 kg

Consult maximum weight and dimensions according to typologies



COR 70 HIDDEN SASH

## CONCEALED DRAINAGE SOLUTION

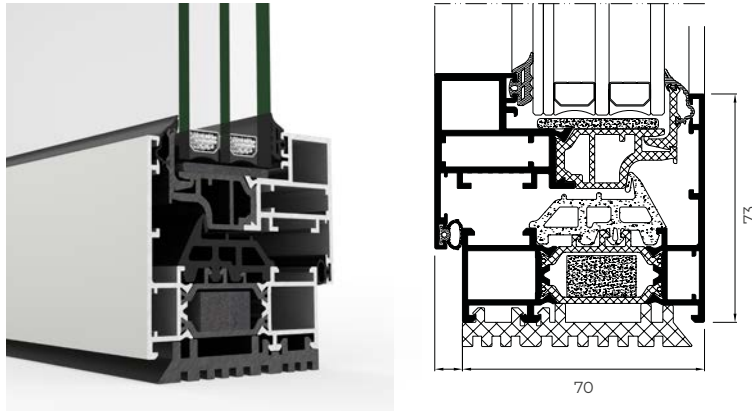

Minimizes the aesthetic impact of the window components.

Compatible with all the 70 mm frame depth systems.

It features a gasket at the bottom of the frame to evacuate the water, replacing the front drainage caps.

Facilitates window fabrication, allowing to place the base of the frame on the site itself.

COR 70  
OC


Hidden sash system oriented to the French market with monoblock frame that makes installation easier. Using this new frame allows faster fabrication and installation, avoiding overlaps, cills and any other complementary profiles, speeding up assembly and fitting. The fabricator can choose either straight or 45 degree cut.

FEATURES		
Transmittance		Uw ≥ 0.85 (W/m²K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1650
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 1 sash  
CSTB Laboratory DTA Certification

POSIBILIDADES






 SECURITY HARDWARE

 CONCEALED HINGES

 CONCEALED HANDLE

 CONCEALED HANDLE


OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Bottom hung  
Parallel Sliding

European Groove  
Thermally broken

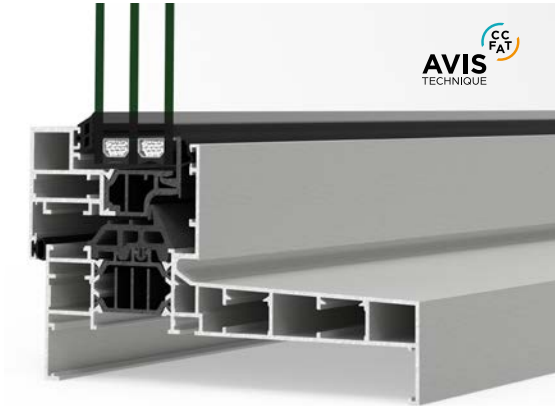

\* COR 70 OC - Mitered frame

**COR 70 OC**  
**Sightlines**  
Frame 70 - 232 mm, Sash 70 mm

**Polyamide Strip Length**  
35 mm

**Profile Thickness**  
Window 1.9 mm


**Glazing**  
Max. 40 mm, Min. 26 mm

**Maximum Sash Dimensions**  
**Standard solution:**  
Width (L) 1300 mm, Height (H) 2400 mm

**HD Hardware (Side Hung):**  
Width (L) 1200 mm, Height (H) 3500 mm





**Maximum Sash Weight**  
160 kg

Consult maximum weight and dimensions according to typologies




\* COR 70 OC - Mitered frame


The half hidden sash version of the COR 70 OC allows to expand the aesthetic possibilities of this series with monoblock frame available at straight or 45 degree cut.


FEATURES		
Transmittance		Uw ≥ 0.9 (W/m²K)
Acoustic insulation		Rw up to 44 dB
Air permeability		Class 4
Watertightness		Class E1800
Wind resistance		Class C5


Reference test 1.23 x 1.48 m / 2 sashes  
CSTB Laboratory DTA Certification

POSIBILIDADES









 SECURITY HARDWARE

 CONCEALED HINGES

 CONCEALED HANDLE

 CONCEALED HANDLE

OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Bottom hung  
Parallel Sliding

**COR 70 OC - Half-Hidden Sash**  
**Sightlines**  
Frame 70 - 232 mm, Sash 78 mm

**Polyamide Strip Length**  
32-35


**Profile Thickness**  
Window 1.5 mm

**Glazing**  
Max. 55 mm, Min. 15 mm


**Maximum Sash Dimensions**  
Width (L) 1000 mm, Height (H) 1700 mm

**Maximum Sash Weight**  
160 kg

Consult maximum weight and dimensions according to typologies

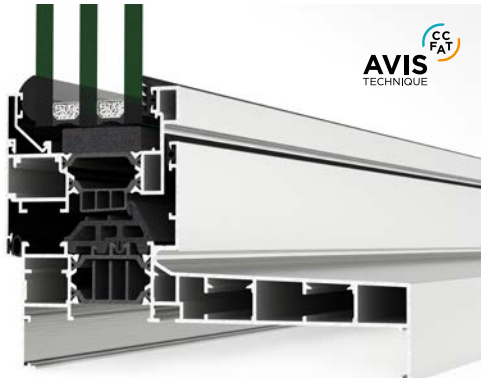

\* COR 70 OC Half Hidden sash - Mitered frame

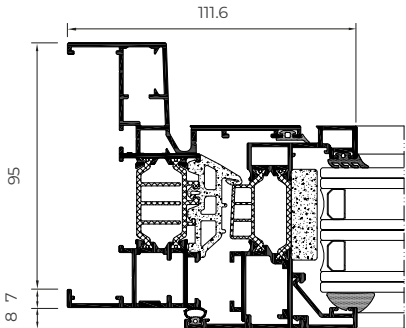

\* COR 70 OC Half Hidden sash - Mitered frame



aesthetic possibilities



**COR 70 OC**  
Straight cut frame



**COR 70 OC**  
Perimetral frame



**COR 70 OC - Half-Hidden sash**  
Straight cut frame




**COR 70 OC - Half-Hidden sash**  
Perimetral frame



# ALU-STEEL




Inspired by classic line designs, the new Alu-Steel system allows to combine aluminium outstanding performances values with a steel-alike appearance. With a sightline of only 72.5 mm, Alu-Steel is a the perfect solution for new buildings and refurbishments, offering two different versions, classic or modern.

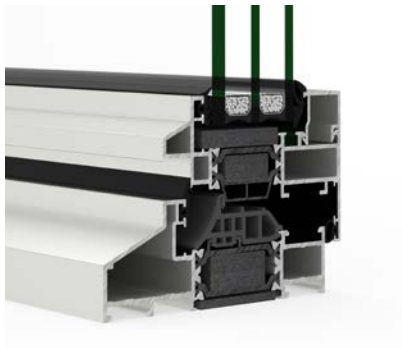


\*Classic version



\*Modern version

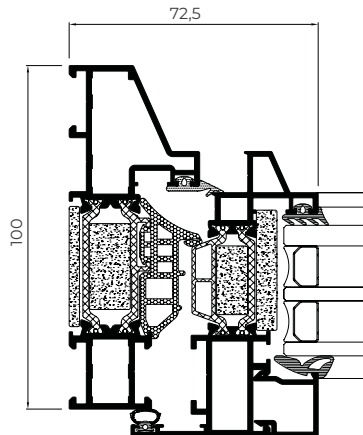

\*Classic version



\*Modern version

European Groove  
Thermally broken



## POSSIBILITIES



SECURITY  
HARDWARE



CONCEALED  
HINGES



CONCEALED  
HANDLE



ACCESSIBILITY

## OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Bottom hung

Outward Opening

Side hung

## FEATURES

Transmittance		$U_w \geq 0.83 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 45 dB
Air permeability		Class 4
Watertightness		Class E1200
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes

## ALU-STEEL



### Sightlines

Modern frame 75 mm  
Classic frame 100 mm  
Sash 83 mm

### Polyamide Strip Length

32-39 mm

### Profile Thickness

Window 1.5 mm

### Glazing

Max. 54 mm, Min. 20 mm

### Maximum Sash Dimensions

Width (L) 1500 mm, Height (H) 2600 mm

### Maximum Sash Weight


160 kg

Consult maximum weight and dimensions according to typologies





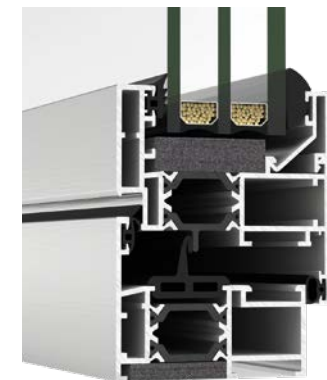


# COR 60

Hinged system with 60 mm of frame depth, featuring 24 mm polyamide strips, which provides a notable thermal and acoustic comfort, achieving a noise reduction of up to 48 dB.




- Sightlines**  
Frame 60 mm, Sash 68 mm
- Polyamide Strip Length**  
24 mm
- Profile Thickness**  
Window 1.6 mm  
Door 1.6 mm
- Glazing**  
Max. 46 mm, Min. 5 mm
- Maximum Sash Dimensions**  
Width (L) 1500 mm, Height (H) 2600 mm
- Maximum Sash Weight**  
160 kg

**Aesthetic possibilities:**  
Sash: Straight or curved  
Glazing Bead: Straight or curved

FEATURES		
Transmittance		$U_w \geq 1.0 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 48 dB
Air permeability		Class 4
Watertightness		Class E1350
Wind resistance		Class C5

Reference test 1.20 x 1.16 m / 2 sashes


European Groove  
Thermally broken

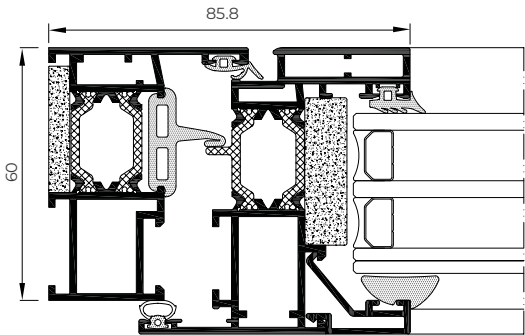

## POSSIBILITIES



## OPENING POSSIBILITIES

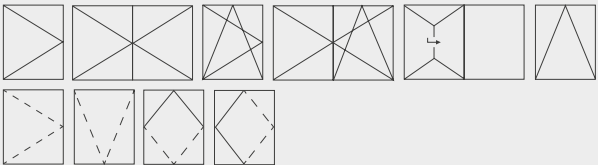

### Inward Opening

Side hung  
Til & turn  
Parallel Sliding  
Bottom hung

### Outward Opening

Side hung  
Top hung  
Pivoting on horizontal or vertical axis.









COR 60

# COR 60
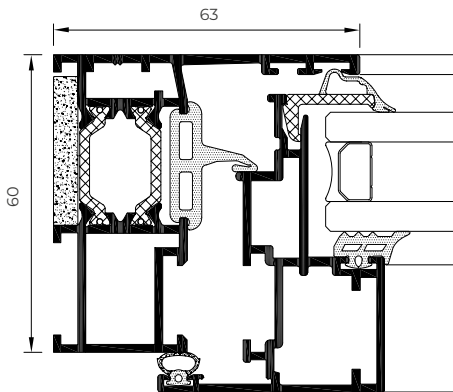
## Hidden Sash

Minimalism for avant-garde projects. It has an interlock profile of only 63 mm, COR 60 Hidden Sash is presented as a hinged system that allows for more glazed surface.



FEATURES		
Transmittance		$Uw \geq 1.5 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 45 dB
Air permeability		Class 4
Watertightness		Class 9A
Wind resistance		Class C5

Reference test 1.13 x 1.16 m / 1 sash

European Groove  
Thermally broken



### Sightlines

Frame 60 mm, Sash 60 mm

### Polyamide Strip Length

24 mm

### Profile Thickness

Window 1.6 mm

Balcony 1.6 mm

### Glazing

Max. 34 mm, Min. 16 mm

### Maximum Sash Dimensions

Width (L) 1300 mm, Height (H) 2400 mm

### Maximum Sash Weight

160 kg

Consult maximum weight and dimensions according to typologies



### POSSIBILITIES



SECURITY  
HARDWARE



CONCEALED  
HINGES

### OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Bottom hung

# COR 3500

Hinged system with a frame depth of 54 mm, a 24 mm thermal break zone, and a maximum glazing capacity of 41 mm. These features grant this system optimal thermal and acoustic performances:  $Uw$  from 1.0  $W/m^2K$ , and up to 46 dB of noise reduction.



### Sightlines

Frame 54 mm, Sash 63 mm

### Polyamide Strip Length

24 mm

### Profile Thickness

Window 1.5 mm

Door 1.7 mm

### Glazing

Max. 41 mm, Min. 5 mm

### Maximum Sash Dimensions

Width (L) 1500 mm, Height (H) 2400 mm

### Maximum Sash Weight






120 kg

Consult maximum weight and dimensions according to typologies

### Aesthetic possibilities:


Sash: Straight or curved  
Glazing Bead: Straight or curved

### FEATURES

Transmittance		$Uw \geq 1.0 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up tp 46 dB
Air permeability		Class 4
Watertightness		Class E1200
Wind resistance		Class C5

Reference test 1.20 x 1.20m / 2 sashes

European Groove  
Thermally broken

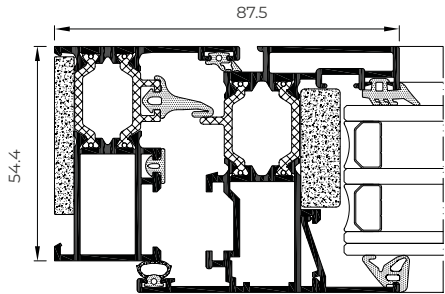

### POSSIBILITIES



SECURITY  
HARDWARE




CONCEALED  
HINGES



ACCESSIBILITY

### OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Parallel Sliding  
Bottom hung


Outward Opening

Side hung  
Top hung



COR  
3000

Hinged system with a 45 mm frame depth and a thermal break of 14.6 mm. This is a versatile system, suitable for mild climates, and with a large variety of opening possibilities.

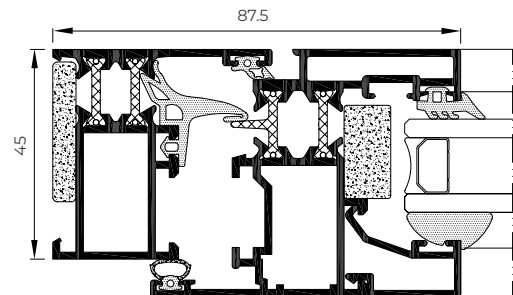


European Groove  
Thermally broken



**Sightlines**  
Frame 45 mm, Sash 53 mm  
**Polyamide Strip Length**  
14.6 mm  
**Profile Thickness**  
Window 1.5 mm  
Door 1.7 mm  
**Glazing**  
Max. 31 mm, Min. 3 mm  
**Maximum Sash Dimensions**  
Width (L) 1500 mm, Height (H) 2400 mm  
**Maximum Sash Weight**  
120 kg  
Consult maximum weight and dimensions according to typologies

**Aesthetic possibilities:**  
Sash: Straight or curved  
Glazing Bead: Straight or curved

OPENING POSSIBILITIES

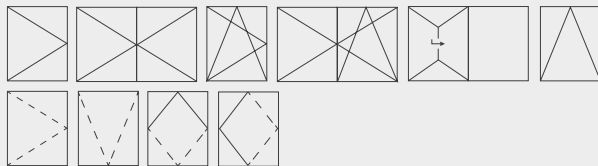

**Inward Opening**  
Side hung  
Tilt & turn  
Parallel Sliding  
Bottom hung

**Outward Opening**  
Side hung  
Top hung  
Pivoting of either horizontal or vertical axis

POSSIBILITIES



FEATURES

Transmittance		$U_w \geq 1.3$ (W/m <sup>2</sup> K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class 9A
Wind resistance		Class C5

Reference test 1.18 x 1.18m / 2 sashes








COR 3000




COR  
2000

Euro-groove hinged system with a glazing capacity of 31 mm. Its profile thickness, of 1.5 mm in the window version and 1.7 mm in the door version, provides it with exceptional rigidity and durability.

FEATURES		
Transmittance		Uw ≥ 1.8 (W/m²K)
Acoustic insulation		Rw up to 39 dB
Air permeability		Class 4
Watertightness		Class 9A
Wind resistance		Class C5


Reference test 1.20 x 1.18 m / 2 sashes

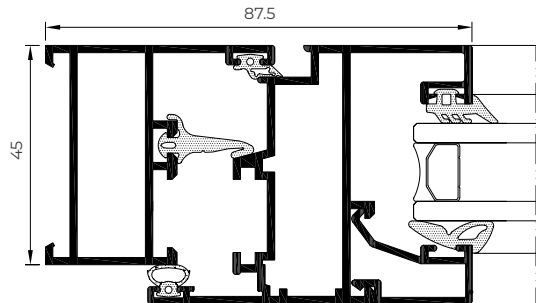

POSSIBILITIES



OPENING POSSIBILITIES

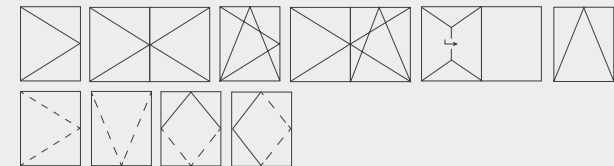

**Inward opening**  
Side hung  
Tilt & turn  
Parallel Sliding  
Bottom hung

**Outward Opening**  
Side hung  
Top hung  
Pivoting of either horizontal or vertical axis

Sightlines

Frame 45 mm, Sash 53 mm

Profile Thickness

Window 1.5 mm  
Door 1.7 mm

Glazing

Max. 31 mm, Min. 3 mm

Maximum Sash Dimensions

Width (L) 1500 mm, Height (H) 2400 mm

Maximum Sash Weight

120 kg

Consult maximum weight and dimensions according to typologies



Aesthetic possibilities:


Sash: Straight or curved  
Glazing Bead: Straight or curved

European  
Groove



COR  
2300


Hinged system with a frame depth of 40 mm and a reduced profile thickness.

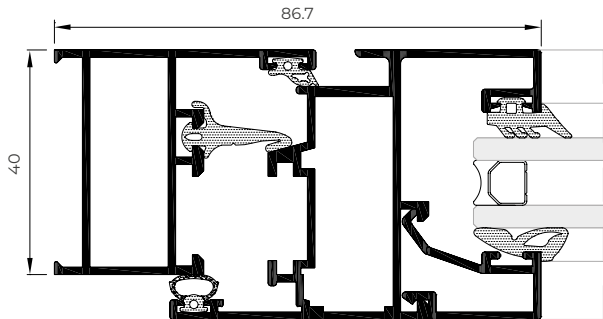

POSSIBILITIES



OPENING POSSIBILITIES

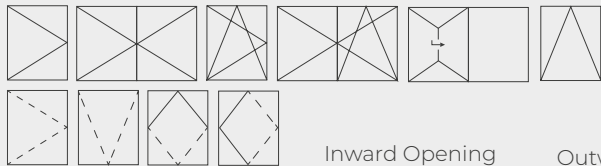

**Inward Opening**  
Side hung  
Tilt & turn  
Parallel Sliding  
Bottom hung





**Outward Opening**  
Side hung  
Top hung  
Pivoting of either horizontal or vertical axis



Aesthetic possibilities:

Sash: Straight or curved  
Glazing Bead: Straight or curved

FEATURES

Transmittance		Uw ≥ 2.0 (W/m²K)
Acoustic insulation		Rw up to 39 dB
Air permeability		Class 4
Watertightness		Class 9A
Wind resistance		Class C5

Reference test 1.105 x 1.210 m / 2 sashes

Sightlines

Frame 40 mm, Sash 48 mm

Profile Thickness

Window 1.3 mm  
Door 1.4 mm

Glazing

Max. 26 mm, Min. 4 mm

Maximum Sash Dimensions

Width (L) 1500 mm, Height (H) 2400 mm

Maximum Sash Weight

120 kg

Consult maximum weight and dimensions according to typologies






European  
Groove




# COR 70

## C16 ST

Hinged system with a 70 mm frame depth compatible with any standard 16 groove hardware. It features a 35 mm thermal break zone in the frame and 30 mm in the sash, providing it with great thermal and acoustic performance.

FEATURES		
Transmittance		$Uw \geq 0.9$ (W/m²K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1500
Wind resistance		Class C5


Reference test 1.23 x 1.48 m / 2 sashes  
CSTB Laboratory DTA Certification

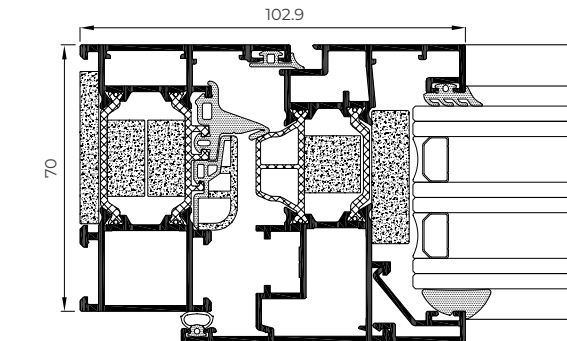

### POSSIBILITIES



### OPENING POSSIBILITIES

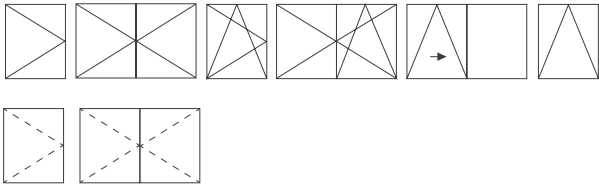

Inward Opening

Side hung  
Tilt & turn  
Tilt & parallel  
Bottom hung

Outward Opening

Side hung (door)



Aesthetic possibilities:  
Sash: Straight  
Glazing Bead: Straight or curved

### Sightlines

Frame 70 mm, Sash 78 mm

### Polyamide Strip Length

Frame 35 mm

Sash 30 mm

### Profile Thickness

Window 1.5 mm

Door 1.7 mm

### Glazing

Max. 55 mm, Min. 15 mm

### Maximum Sash Dimensions

Width (L) 1500 mm, Height (H) 2600 mm

### Maximum Sash Weight

150 kg

Consult maximum weight and dimensions according to typologies

16 Grooven

Thermally broken








COR 70 C16 ST

COR 70


Evolution


Hinged system with groove 16 destined for the industrial production of windows, doors and balconies. In order to reduce the manufacturing period, this new series offers the possibility of using pre-assembled gaskets, assembling cleats and a central floating mullion with a two piece hidden sash, which allows the glazing of double-sash windows on site. COR 70 Evolution is presented in a version of hidden or half-hidden sash with monoblock frames, in straight cut or perimetral, aiming at facilitating the on-site installation.


FEATURES		
Transmittance		Uw ≥ 0.81 (W/m²K)
Acoustic insulation		Rw up to 43 dB
Air permeability		Class 4
Watertightness		Class E1500
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes


POSSIBILITIES


 SECURITY HARDWARE


 CONCEALED HINGES


 CONCEALED HANDLE


OPENING POSSIBILITIES

 Inward Opening

 Side hung


 Tilt & turn

 Bottom hung

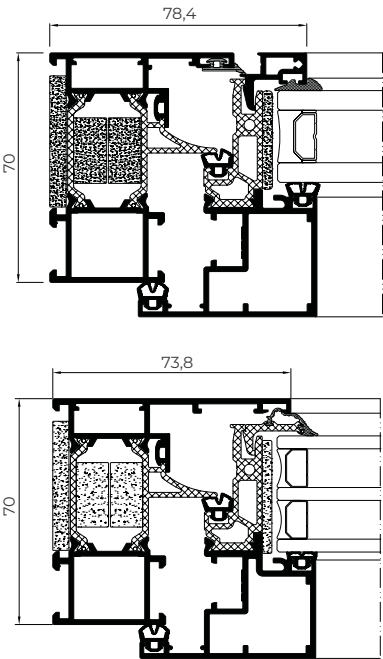


**Sightlines**  
Frame 70 - 232 mm  
Sash 72,5 - 80,5 mm  
**Glazing**  
36 mm  
**Maximum Sash Dimensions**  
Width (L) 1300 mm  
Height (H) 2400 mm  
**Maximum Sash Weight**  
150 kg

Consult maximum weight and dimensions according to typologies

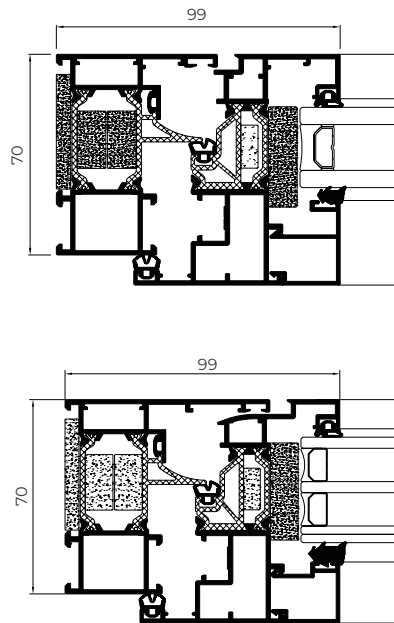


**Sightlines**  
Frame 70 - 232 mm  
Sash 80,5 - 88,5 mm  
**Glazing**  
63 mm  
**Maximum Sash Dimensions**  
Window:  
Width (L) 1000 mm  
Height (H) 1700 mm  
Balcony / Door:  
Width (L) 1500 mm  
Height (H) 2600 mm  
**Maximum Sash Weight**  
150 kg

16 Grooven  
Thermally broken

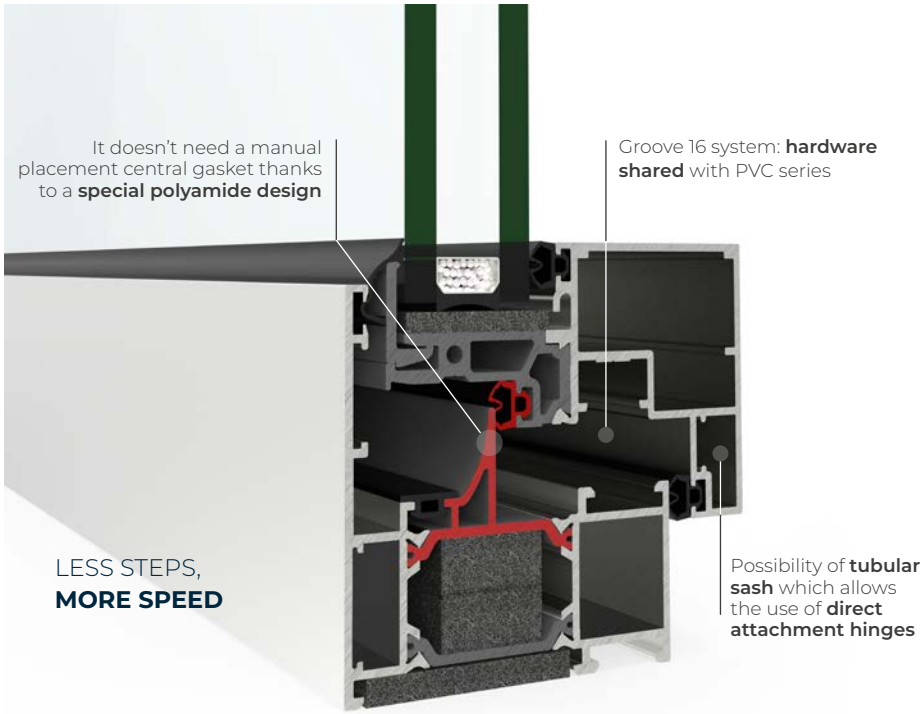

POSSIBILITY OF PROVIDING  
PREASSEMBLED GASKETS

Gaskets available  
in black and grey

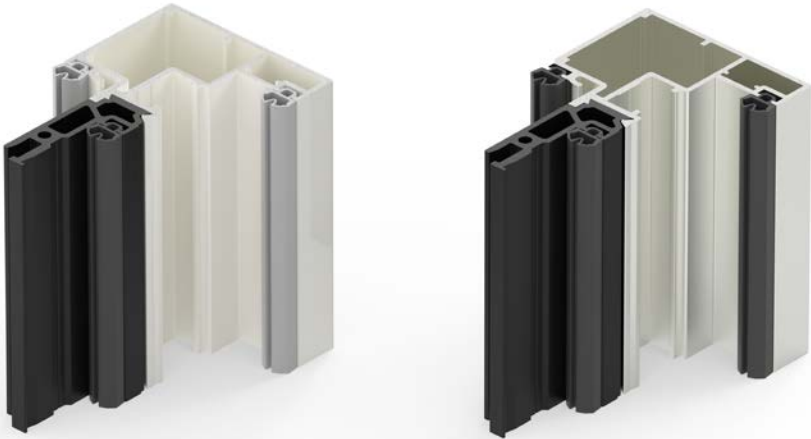

MANUAL GLAZING  
GASKETS AVAILABLE



Glazing gasket  
6.5 mm



Glazing gasket  
8.5 mm



Glazing gasket  
2.5 mm



Glazing gasket  
4.5 mm



aesthetic possibilities




16 Grooven  
Thermally broken



Covers available  
in black or white



**ASSEMBLING CLEATS**  
In order to speed the assembly up

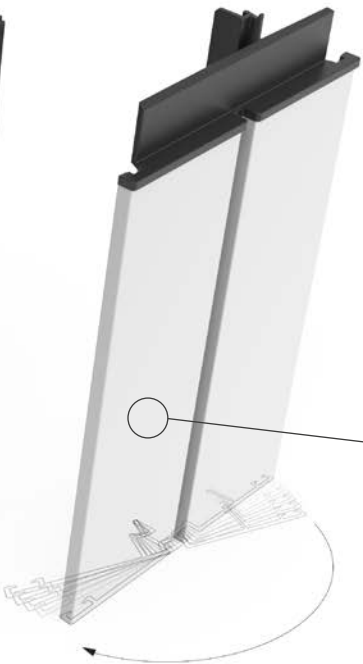

**NEW FLOATING MULLION**  
Floating mullion profile in two parts in order to **facilitate the on-site glazing** without the need to take the profile and hardware apart

COR 70  
Evolution




# COR 70


## Hidden Sash C16 ST

Hidden sash hinged system compatible with any standard 16 groove hardware. Its attractive design is based on the concealment of the sash behind the frame, reducing the aluminium interlock profile to up to 73.8 mm. Thus achieving a glazed surface that can reach 85% of the totality of the window's glazing, facilitating the entry of light into the rooms. Its avant-garde aesthetic is completed with the possibility of concealing the drainage and hinges.

### OPENING POSSIBILITIES



Inward Opening  
Side hung  
Tilt & turn  
Bottom hung

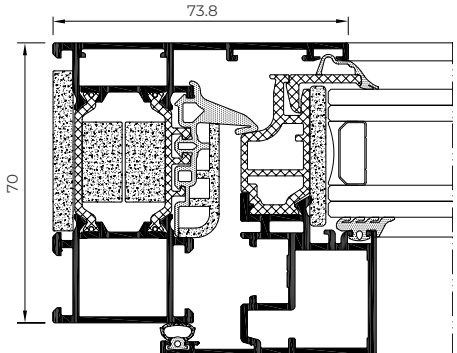

### Sightlines

Frame 70 mm, Sash 70 mm

### Polyamide Strip Length

35 mm

### Profile Thickness

Window 1.6 mm

### Glazing

Fixed light: Max. 40 mm, Min. 27 mm

Window: Max. 38 mm, Min. 24 mm

### Maximum Sash Dimensions

Width (L) 1300 mm, Height (H) 2400 mm

### Maximum Sash Weight

150 kg

Consult maximum weight and dimensions according to typologies

### POSSIBILITIES



SECURITY  
HARDWARE



CONCEALED  
HINGES




CONCEALED  
DRAINAGE

### FEATURES

Transmittance		$U_w \geq 0.93 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 45 dB
Air permeability		Class 4
Watertightness		Class E1200
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes  
CSTB Laboratory DTA Certification

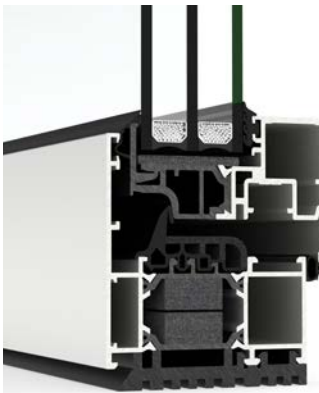

\* Possibility of concealed drainage

## COR 70 HIDDEN SASH C16 ST



# COR 3500

## C16 ST






Compatible with any standard 16 groove hardware in the market. This hinged system has a 54 mm frame depth and a thermal break zone of 24 mm. It is presented as a versatile solution for mild climates.

### POSSIBILITIES

 SECURITY  
HARDWARE


 CONCEALED  
HINGES

 ACCESSIBILITY

FEATURES		
Transmittance		$Uw \geq 1.2$ (W/m²K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class 9A
Wind resistance		Class C4


Reference test 1.23 x 1.48 m / 2 sashes

### OPENING POSSIBILITIES

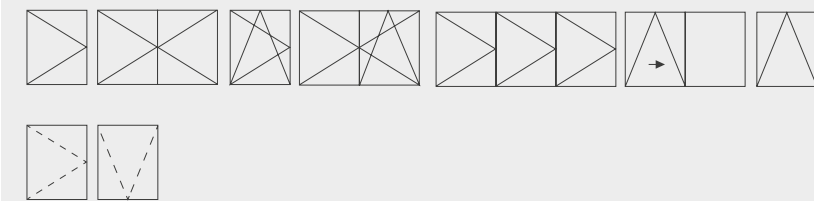


Inward Opening

Side hung  
Tilt & turn  
Bi-fold  
Tilt & parallel  
Bottom hung

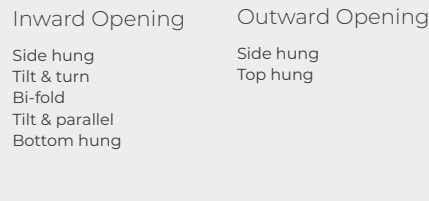

Outward Opening

Side hung  
Top hung

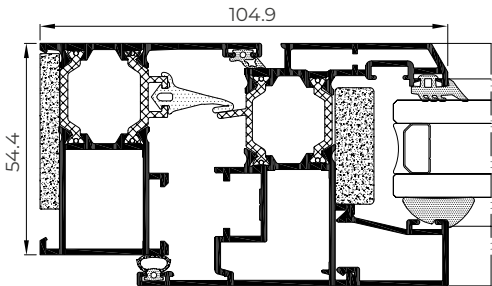

**Aesthetic possibilities:**  
Sash: Curved or chamfered  
Glazing Bead: Straight or curved



16 Grooven  
Thermally broken



COR 3500 C16 ST



**Sightlines**  
Frame 54 mm, Sash 62 mm

**Polyamide Strip Length**  
24 mm

**Profile Thickness**  
Window 1.5 mm  
Door 1.7 mm

**Glazing**  
Max. 32 mm, Min. 27 mm

**Maximum Sash Dimensions**  
Width (L) 1500 mm, Height (H) 2600 mm

**Maximum Sash Weight**  
120 kg


Consult maximum weight and dimensions according to typologies



# COR URBAN


## C16

This system is especially suitable for buildings located in areas with high acoustic activity. This thermally broken window with double hidden sash of 122 mm, quadruple glazing and 4 gaskets, enables a noise reduction of up to 50 dB.

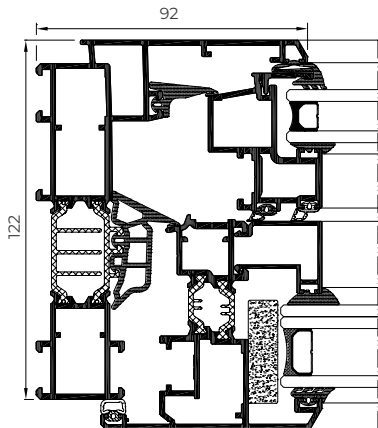

- Sightlines**  
Frame 122 mm, Sash 121 mm
- Polyamide Strip Length**  
Frame 35 mm, Sash 20 mm
- Profile Thickness**  
Window 1.6 mm
- Glazing**  
Internal sash: Max. 38 mm, Min. 13 mm  
External sash: Max. 22 mm, Min. 11 mm
- Maximum Sash Dimensions**  
Width (L) 1200 mm, Height (H) 2200 mm
- Maximum Sash Weight**  
150 kg
- Consult maximum weight and dimensions according to typologies

16 Grooven  
Thermally broken

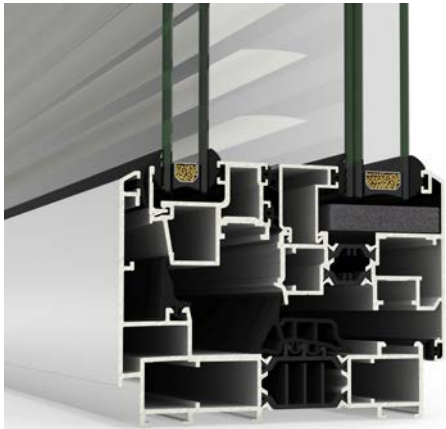


**Aesthetic possibilities:**  
Sash: Chamfered / Glazing Bead: Chamfered

### POSSIBILITIES



CONCEALED  
HINGES

### OPENING POSSIBILITIES



Inward opening  
Side hung  
Tilt & turn

### FEATURES

Transmittance		$U_w \geq 1.2 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 50 dB
Air permeability		Class 4
Watertightness		Class E1650
Wind resistance		Class C5


Reference test 1.23 x 1.48 m / 1 sash



# COR GALICIA

## Premium C16

Thermally broken mixed system that combines an external aluminium profile and its excellent performance with the warmth and design that an internal timber profile provides. Any of the finishes amongst the extensive range of CORTIZO powder coating or anodizing finishes may be selected for the surface treatment of the external face. On the other hand, the internal face is available in American oak, sapelly, mellis pine and other timber options available on request, all of them treated with a transparent, satin, dissolvent free ecological varnish.

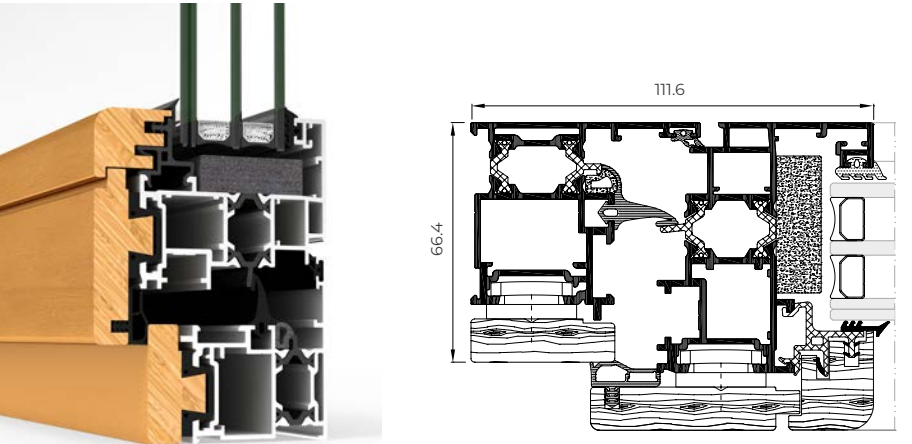

OPENING POSSIBILITIES

Inward opening

Side hung

Tilt & turn

Tilt & parallel

Bottom hung

16 Grooven

Thermally broken



### POSSIBILITIES



FEATURES		
Transmittance		Uw ≥ 1.1 (W/m²K)
Acoustic insulation		Rw up to 40 dB
Air permeability		Class 4
Watertightness		Class E1050
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes

### Sightlines

Frame 66.4 mm, Sash 85.3 mm

### Polyamide Strip Length

Frame 14.8 mm

Sash 16 mm

### Profile Thickness

Window 1.5 mm

Door 1.6 mm

### Glazing

Sash: Max. 40 mm, Min. 18 mm

Fixed light: Max. 30 mm, Min. 8 mm

### Maximum Sash Dimensions

Width (L) 1400 mm

Height (H) 2400 mm

### Maximum Sash Weight

100 kg

### Aesthetic possibilities:

Sash: Straight / Glazing Bead:

Curved

Consult maximum weight and dimensions according to typologies








## COR GALICIA PREMIUM C16






# CASEMENT


Thermally broken window that allows for both side hung and top hung outward openings. This solution, with a thermal break zone of 32 mm and a transmittance  $U_w$  from 0.9 W/m<sup>2</sup>K, has the British security certification PAS 24, being especially suitable for this market.

FEATURES		
Transmittance		$U_w \geq 0.9$ (W/m <sup>2</sup> K)
Acoustic insulation		Rw up to 45 dB
Air permeability		Class 4
Watertightness		Class E1200
Wind resistance		Class CE 2400
Security test	 	Passed






Reference test 1.44 x 1.33 m / 1 sash + 1 fixed light  
Security test: Reference test 1.44 x 1.33 m / 1 sash + 1 fixed light

POSSIBILITIES



 SECURITY HARDWARE

 CONCEALED HINGES

OPENING POSSIBILITIES



Outward Opening  
Side hung  
Top hung

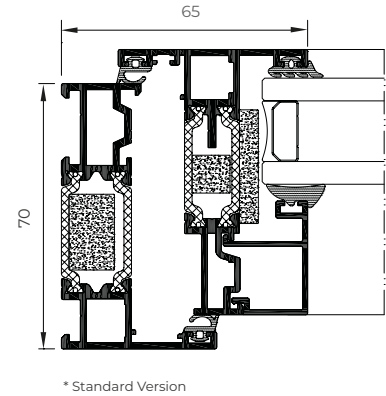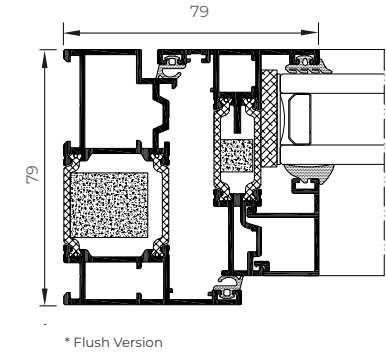

Thermally broken

## Sightlines

Frame 70 mm, Sash 70 mm

## Polyamide Strip Length

32 mm

## Profile Thickness

Window 1.6 mm

## Glazing

Max. 44 mm, Min. 23 mm

## Maximum Sash Dimensions

### Slim Sash (Side Hung):

Width (L) 950 mm, Height (H) 1300 mm

### Slim Sash (Top Hung):

Width (L) 1200 mm, Height (H) 1300 mm

### Heavy Duty Sash (Side Hung):

Width (L) 750 mm, Height (H) 1750 mm

### Heavy Duty Sash (Top Hung):

Width (L) 1800 mm, Height (H) 1800 mm

## Maximum Sash Weight

Side Hung Slim Sash: 35 kg

Top Hung Slim Sash: 50 kg

Side Hung Heavy Duty Sash: 42 kg

Top Hung Heavy Duty Sash: 100 kg

Consult maximum weight and dimensions according to typologies



CASEMENT

contemporary  
enclosures










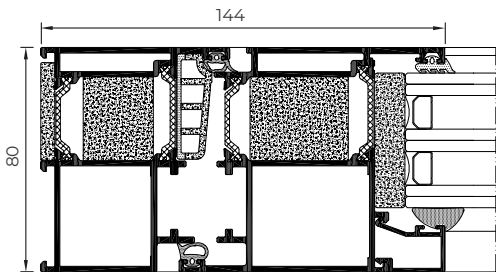

**door** systems

Millennium Plus 80

DOOR

Flush entrance door system with straight lines, 80 mm of frame depth, and a thermal break zone of 34 mm, particularly suitable for commercial and residential buildings.



FEATURES		
Transmittance		Uw ≥ 0.8 (W/m²K)
Acoustic insulation		Rw up to 40 dB
Air permeability		Class 4
Watertightness		Class 6A
Wind resistance		Class C4
Resistance to mild impact		Class 5 (Max.)
Repeated openings and closings		1,000,000 Cycles
Burglar resistance		Grade RC2

Wind resistance: Reference test 1.20 x 2.30 m / 1 sash  
Resistance to mild impact: EN 13049. Test on door reference 1.80 x 2.20 m / 2 sashes. Laminated glass 3+3  
Resistance to repeated openings and closings: EN 1191. Test on door reference 2.10 x 2.20 m / 1 sash  
Burglar test NEN 5096: 2012+A1: 2015 in EN 1627:201

Sightlines

Frame 80 mm, Sash 80 mm

Polyamide Strip Length

34 mm

Profile Thickness

Door 2.0 mm

Glazing

Max. 64 mm, Min. 15 mm

Maximum Sash Dimensions

Door:

Width (L) 1800 mm, Height (H) 3000 mm

Concealed door hinges:

Width (L) 1500 mm, Height (H) 3000 mm


Maximum Sash Weight


220 kg


Consult maximum weight and dimensions according to typologies




POSSIBILITIES

 CONCEALED HINGES

 ACCESSIBILITY

 AUTOMATION

OPENING POSSIBILITIES



Inward Opening


Side hung

Outward opening

Side hung

Automatic Opening

Inward and outward side hung



AUT.

AUT.

Millennium Plus 70

DOOR

Flush entrance pedestrian door system with 70 mm of frame depth that guarantees high thermal and acoustic insulation.



Sightlines

Frame 70 mm, Sash 70 mm

Polyamide Strip Length

24 mm

Profile Thickness

Door 2.0 mm

Glazing

Max. 54 mm, Min. 15 mm

Maximum Sash Dimensions

Door:

Width (L) 1800 mm, Height (H) 3000 mm

Concealed door hinges:


Width (L) 1500 mm, Height (H) 3000 mm

Maximum Sash Weight

220 kg

Consult maximum weight and dimensions according to typologies

OPENING POSSIBILITIES



Inward Opening


Side hung

Outward opening

Side hung

Automatic Opening

Outward and inward side hung










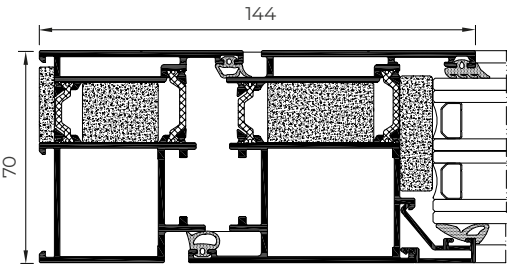

AUT.

AUT.

Swing Opening

Side hung



FEATURES		
Transmittance		Uw ≥ 0.9 (W/m²K)
Acoustic insulation		Rw up to 38 dB
Air permeability		Class 4
Watertightness		Class 6A
Wind resistance		Class C4
Resistance to mild impact		Class 5 (Max.)
Repeated opening and closings		1,000,000 cycles
Burglar resistance		Grade RC2

Wind resistance: Reference test 1.20 x 2.30 m / 1 sash  
Resistance to mild impact: EN 13049. Test on door reference 1.80 x 2.20 m / 2 sashes. Laminated glass 3+3  
Security test: EN 5096: 2012+A1: 2015 in EN 1627: 201  
Resistance to repeated openings and closings: EN 1191. Test on door reference 2.1 X 2.2 m / 2 sashes  
Burglar test NEN 5096: 2012+A1: 2015 en EN 1627:201

POSSIBILITIES

 CONCEALED HINGES

 ACCESSIBILITY

 AUTOMATION





MILLENNIUM PLUS 80 DOOR

## CONCEALED HINGES


The Millennium Plus door system allows **concealed hinges** that reinforce the flush aesthetic of the series






Millennium Plus Pivot  
DOOR

The new CORTIZO entrance door system, available in a paneled or glazed version, responds to the latest design trends. Thanks to its axes, it allows large pivot openings, becoming a cutting-edge solution for contemporary architecture. Safety and excellent thermal and acoustic performance are also protagonists in a system that completes CORTIZO's catalog of minimalist solutions.

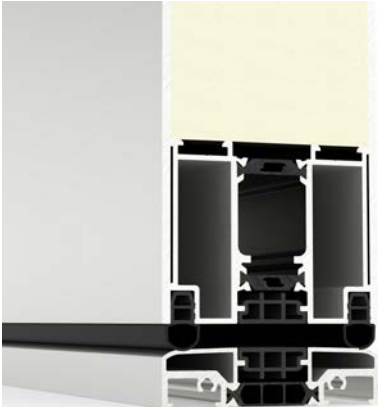




Paneled version

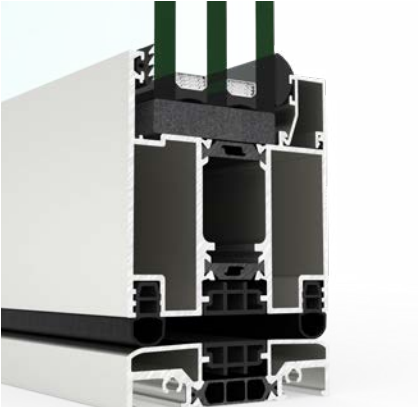

Glazed version

FEATURES		
Transmittance		$U_D \geq 0,86 \text{ (W/m}^2\text{K)}$
Air permeability		Class 4
Watertightness		Class 5A
Wind resistance		Class C5

Reference test 1,20 x 2,00 m / 1 Sash

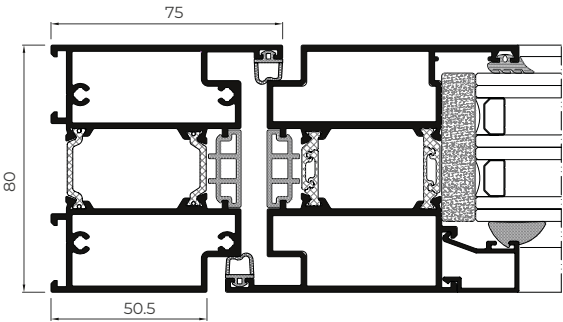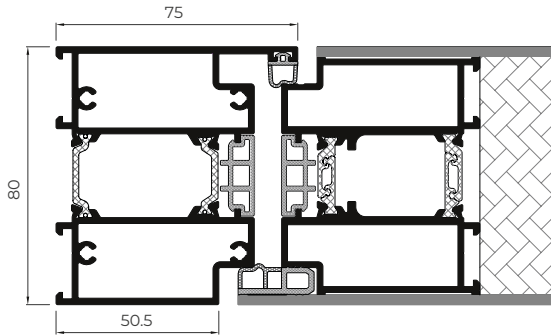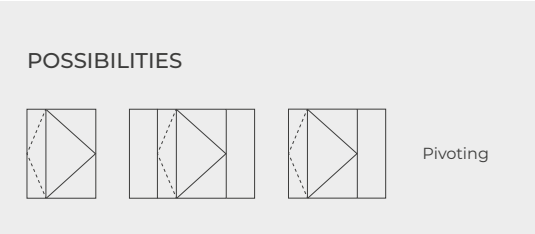

- Sightlines**  
Frame 80 mm, Sash 80 mm
- Polyamide Strip Length**  
24 / 26 mm
- Profile Thickness**  
Door 2,0 mm
- Panel**  
80 mm
- Maximum glazing**  
64 mm
- Maximum Sash Dimensions**  
Width (L) 2100 (1700\* + 400) mm  
Height (H) 3000 mm
- Maximum Sash Weight**  
250 kg


Consult maximum weight and dimensions according to typologies  
\* Measured from the pivot axis

MILLENNIUM PLUS PIVOT DOOR





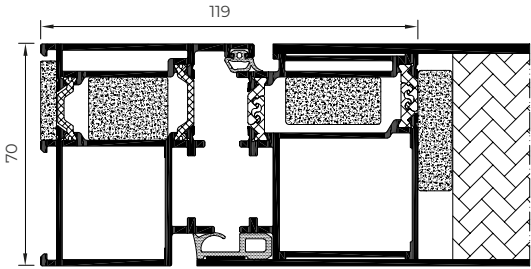

Panelled  
DOOR

Compatible with the Millennium Plus 80 and Millennium Plus 70 series, it incorporates a panel integrated into the sash, which allows a wide range of aesthetic possibilities. In addition, it allows for the installation of an embedded handle with led illumination and a scanner.



OPENING POSSIBILITIES



Inward Opening

Side hung

Automatic side hung

Outward Opening

Side hung

Automatic side hung

Wind resistance: Reference test 1.20 x 2.30 m / 1 sash  
Resistance to mild impact: Test carried out according to standard EN 13049  
Test on door reference 1.80 x 2.20 m / 2 sashes. Laminated glass 3+3  
Resistance to repeated openings and closing: Test carried out according to standard EN 1191  
Test on door reference 0.935 x 2.10 m / 1 sash

\*Compatible with Millenium Plus 70 and 80 doors

Doors



Sightlines

Frame 80 / 70 mm, Sash 80 / 70 mm

Polyamide Strip Length

30 / 34 mm (80)

20 / 24 mm (70)

Profile Thickness

Door 2,0 mm

Panel

Max. 80 mm, Min. 33 mm (80)

Max. 70 mm, Min. 23 mm (70)

Maximum Sash Dimensions

Door:

Width (L) 1800 mm, Height (H) 3000 mm

Concealed door hinges:

Width (L) 1500 mm, Height (H) 2700 mm

Maximum Sash Weight

220 kg

120 Kg (concealed hinges)


Consult maximum weight and dimensions according to typologies



Millennium 2000


DOOR

Pedestrian door system for commercial and residential buildings that allows the incorporation of double or triple flag hinges of high strength, capable of supporting up to 180 kg. per sash.

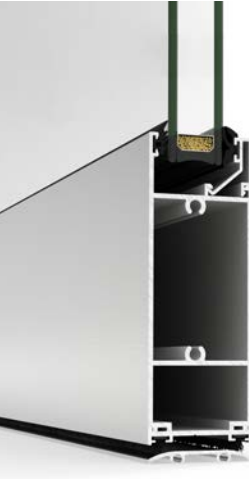

- Sightlines**  
Frame 45 mm, Sash 45 mm
  - Profile Thickness**  
Door 2.0 mm
  - Glazing**  
Max. 30 mm, Min. 3 mm
  - Maximum Sash Dimensions**  
Side hung:  
Width (L) 1450 mm, Height (H) 3000 mm  
Swing:  
Width (L) 1100 mm, Height (H) 3000 mm
  - Maximum Sash Weight**  
180 kg
- Consult maximum weight and dimensions according to typologies

OPENING POSSIBILITIES

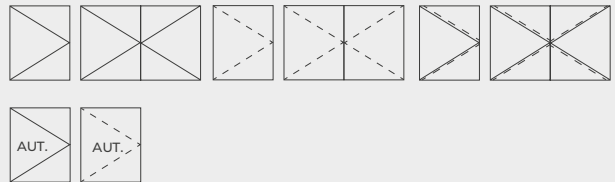

- Inward opening  
Side hung  
Automatic side hung
- Outward Opening  
Side hung  
Automatic side hung
- Swing Opening  
Side hung 1 and 2 sashes

POSSIBILITIES




ACCESSIBILITY

**Aesthetic possibilities:**  
Sash: Straight / Bead: Straight or curved

FEATURES

Transmittance		$U_w \geq 2.3 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 38 dB
Resistance to mild impact		Class 5 (Max.)

Test carried out according to standard UNE-EN 13059  
Reference test 1.80 x 2.20 m / 2 sashes. Laminated glass 3+3

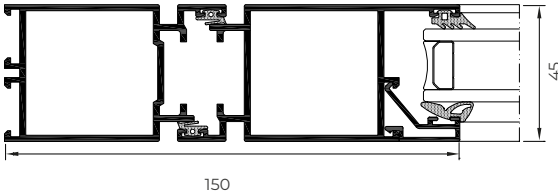





MILLENNIUM SLIDING AUTOMATIC DOOR

## Millennium Sliding Automatic

### DOOR

Door system with sliding sashes and automatic opening, designed to solve high traffic entrances (offices, shopping centres, hospitals...) since it guarantees fluidity of user's traffic and safety in emergency situations.

#### POSSIBILITIES



AUTOMATION



ACCESSIBILITY



#### Sightlines

Frame 45 mm

Sash 45 mm (EC-drive engine)

Sash 25 mm (Slimdrive engine)

#### Profile Thickness

Door 2.0 mm

#### Glazing

Max. 30 mm, Min. 3 mm


#### Maximum Sash Dimensions

Width (L) 2000 mm, Height (H) 3000 mm

#### Maximum Sash Weight

120 Kg

Consult maximum weight and dimensions according to typologies

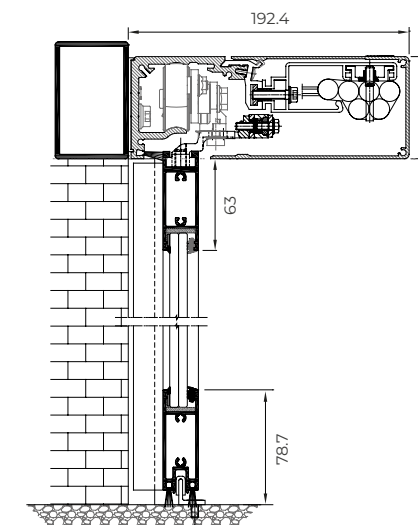

#### OPENING POSSIBILITIES



Automatic Opening

Sliding 1 sash and 1 fixed light







Sliding 2 sashes and 2 fixed lights




Bi-fold

DOOR

Bi-fold door system with 73 mm of frame depth and optimal thermal and acoustic performances, ideal for moderate climates.

FEATURES		
Transmittance		$Uw \geq 0.97 \text{ (W/m}^2\text{K)}$
Air permeability		Class 4
Watertightness		Class 9A
Wind resistance		Class A3
Security test	 	Passed

Wind resistance: reference test 2.700 x 2.530 m / 3 sashes  
Security test: Configuration 330. 2701 x 2517 mm / 3 sashes

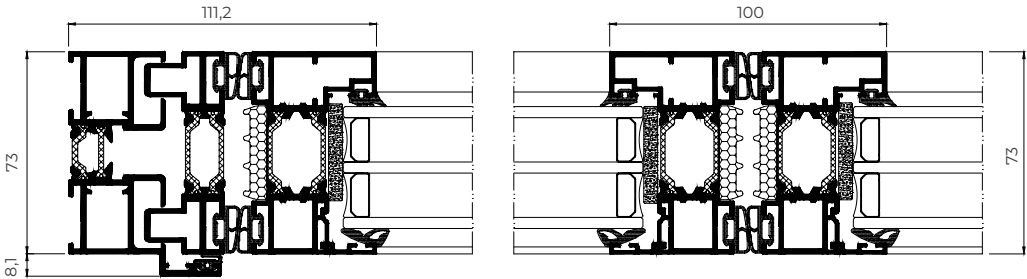

OPENING POSSIBILITIES



Inward  
From 1 to 14 sashes

Outward

From 1 to 14 sashes  
Possibility of corner sash at 90° without mullion

POSSIBILITIES



SECURITY  
HARDWARE



ACCESSIBILITY

Sightlines

Frame 73 mm, Sash 73 mm

Polyamide Strip Length

Frame 20 mm

Sash 30 mm

Profile Thickness

Door 1.8 mm

Glazing

Max. 45 mm, Min. 25 mm

Maximum Sash Dimensions

Width (L) 1200 mm, Height (H) 3000 mm

Maximum Sash Weight

120 kg








Consult maximum weight and dimensions according to typologies




Bi-fold plus

DOOR

Separate environments and unify spaces with this bi-fold door system with an 80 mm deep frame. This evolution of the Bi-fold series offers an excellent thermal and acoustic performance, thanks to its 45 mm thermal break and a glazing capacity up to 52 mm. Besides, it presents a slim central section of 110 mm which allows the maximisation of the glazed surface, filling the interior spaces with natural light.

FEATURES		
Transmittance		$Uw \geq 0.78 \text{ (W/m}^2\text{K)}$
Air permeability		Class 4
Watertightness		Class E750
Wind resistance		Class C3
Repeated openings and closings		50.000 cycles (Main swing door) 25.000 cycles (Even sashes)
Security test	 	Passed

Reference test 3.73 x 2.50 m, 3 sashes  
Security test: 3 sashes reference test. Configuration 321 2.70 x 2.50 m  
Resistance to repeated openings and closings: EN 1191, 3 sashes reference test. Configuration 321 3.73 x 2.50 m

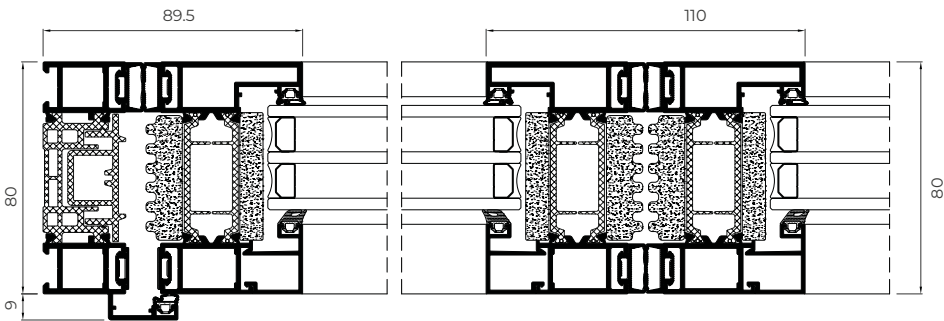

Sightlines

Frame 80 mm, Sash 80 mm

Polyamide Strip Length

Frame 45 mm

Sash 45 mm

Profile Thickness

Door 1.8 mm

Glazing

Max. 48 mm, Min. 25 mm

Maximum Sash Dimensions

Width (L) 1200 mm, Height (H) 3000 mm

Maximum Sash Weight

120 kg

Consult maximum weight and dimensions according to typologies









contemporary  
enclosures








**sliding** window and door systems




# COR VISION

## Plus

The greatness of minimalism is reflected in this sliding system of large dimensions with sashes of up to 4 meters, interlock sightline of only 25 mm and frames embedded in the perimeter, allowing for a glazed surface of up to 94%. It has a maximum glazing capacity of 56 mm, offering excellent thermal and acoustic performances. Available with manual (up to 400 kg) or motorized (up to 700 kg) opening system. Additionally, accessibility is favoured by the possibility of hiding the rail and even integrating it fully into the floor.

FEATURES		
Transmittance		$Uw \geq 0.9 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 43 dB
Air permeability		Class 4
Watertightness		Class 7A* / 9A**
Wind resistance		Class C3* / C4**
<small>Wind resistance: * Reference test balcony 4.00 x 3.00 m / 2 sashes ** Reference test balcony 4.00 x 3.00 m / 1 sash + 1 fixed light</small>		

OPENING POSSIBILITIES

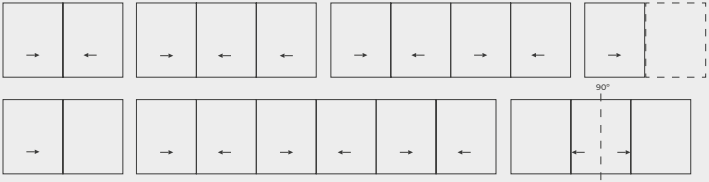

Sliding

Possibility of 1, 2, 3 or 4 rails

Possibility of inner and outer corner sash at 90° without mullion

Pocket possibility

Sliding  
Thermally broken



- Sightlines

Frame 180 mm / 278 mm 3 rails

Sash 69 mm
- Polyamide Strip Length

Frame 40 mm

Sash 18 / 32 mm
- Profile Thickness

Door 2.0 mm
- Glazing

Max. 56 mm, Min. 36 mm
- Maximum Sash Dimensions


Width (L) 4000 mm, Height (H) 4000 mm

\*Glazed surface 14 m²
- Maximum Sash Weight


400 kg Manual

700 Kg Motorized

Consult maximum weight and dimensions according to typologies

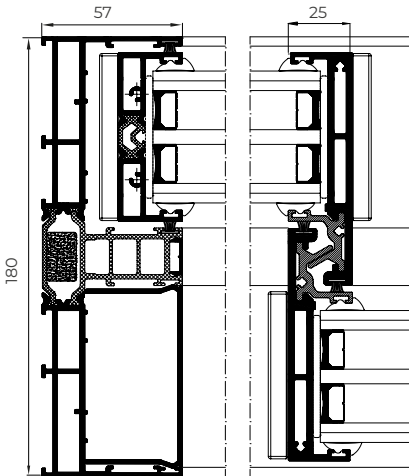

# **DRAINAGE** SOLUTION

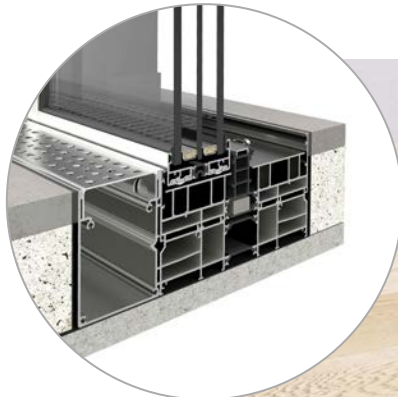

Possibility of **embedding the bottom profile and integrate it within the floor finish** (pallet, pavement, ceramic...), achieving a transition without any obstacle between the interior and exterior of the room.



**SECURITY**  
HARDWARE

**FLUSH SECURITY**  
HARDWARE

**MAXIMUM SECURITY**

Locking system with internal and external key.  
Embedding of the hardware into the profile with the same minimalist aesthetic.  
Possibility of powder coating in any color to provide uniformity to the ensemble.

**POSSIBILITIES**



AUTOMATION






ACCESSIBILITY



**COR VISION PLUS**

# COR VISION EVOLUTION


The new version of the Cor Vision Sliding accentuates its minimalism thanks to a closing system that allows the sashes to be embedded peripherally, opening up to infinite views that are only interrupted by a 25 mm interlock.

FEATURES		
Transmittance		$U_w \geq 0.88 \text{ (W/m}^2\text{K)}$
Air permeability		Class 4
Wind resistance		Class C5

Sliding  
Thermally broken





**Sightlines**  
Frame 160 mm / 248 mm 3 rail  
Lateral sightline 62 mm  
Interlock 25 mm  
**Glazing**  
Max. 44 mm, Min. 28 mm  
**Maximum sash dimensions**  
Width (L) 3000 mm, Height (H) 3500 mm  
**Maximum sash weight**  
500 kg  
Consult maximum weight and dimensions according to typologies

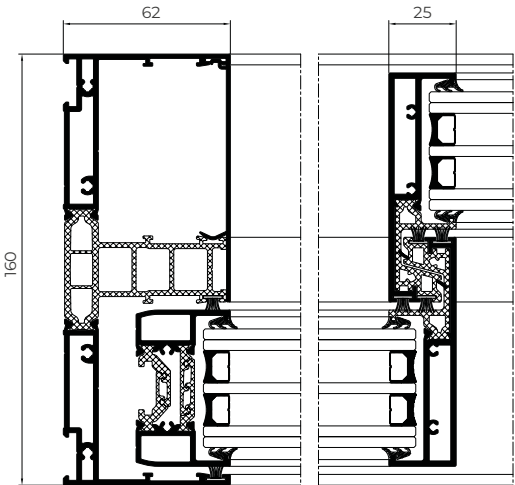

## OPENING POSSIBILITIES

Sliding  
Possibility of 1, 2, or 3 rails  
Possibility of inner and outer corner sash at 90° without mullion  
Pocket possibility

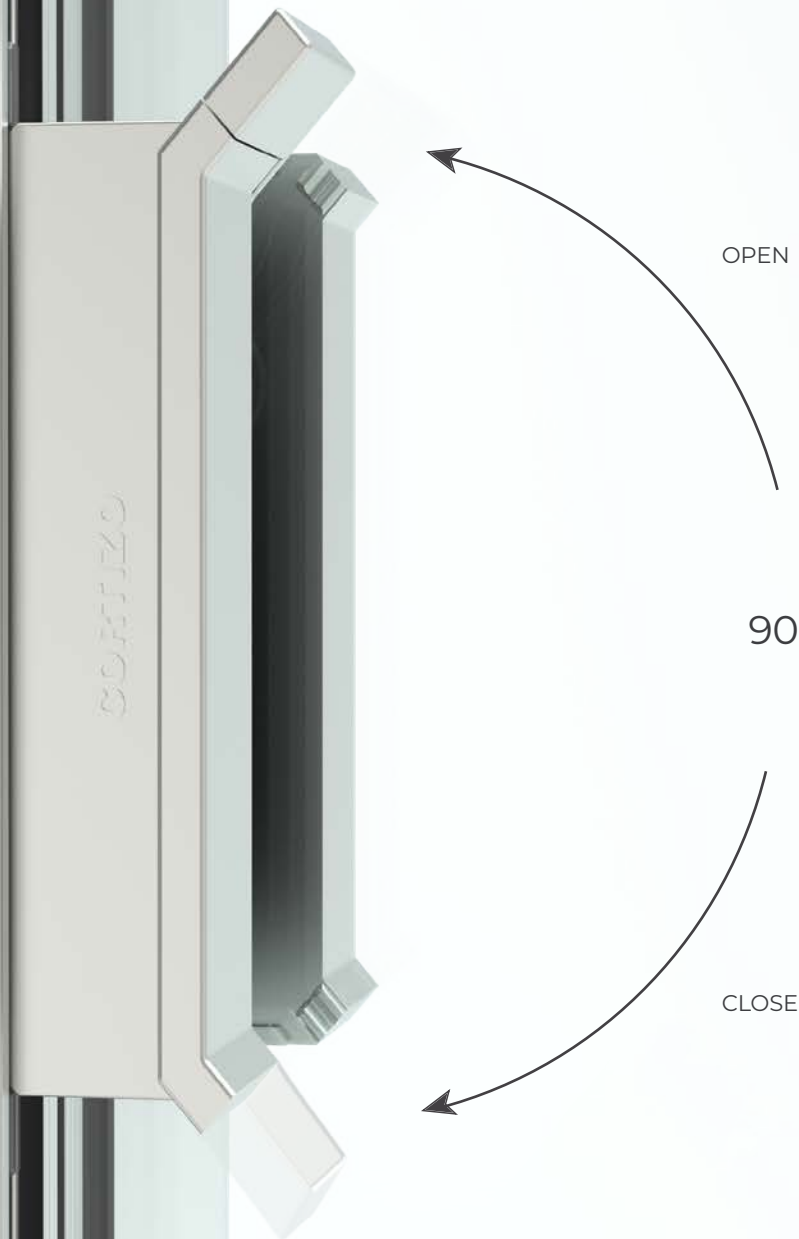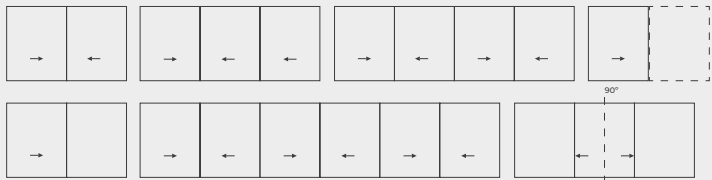

The new lock of the COR Vision Evolution is conceived to achieve total concealment of the sashes behind the frame, activating the opening and closing of the window with a smooth semicircular turn.




COR  
VISION

Thermally broken minimalist sliding system that provides maximum luminosity with a minimal aluminium interlock profile. It has an elegant design only 20 mm sightline and offers the possibility of an inlaid closing system and of hiding the frame along the perimeter.

Possibility of locking system in the interlock, thus allowing the concealment of the sashes in the frame from a frontal view.

Possibility of embedded locking system which facilitates the sashes crossing.

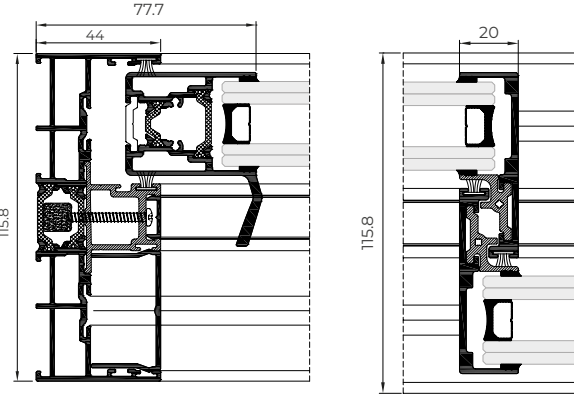

FEATURES		
Transmittance		Uw ≥ 1.3 (W/m²K)
Acoustic insulation		Rw up to 41 dB
Air permeability		Class 4
Watertightness		Class 7A
Wind resistance		Class C5
Security test		Passed

Reference test 1.23 x 1.55 m / 1 sash + 1 fixed light

Sliding  
Thermally broken



**Sightlines**  
Frame 116 mm / 182 mm 3 rails  
Sash 37 mm

**Polyamide Strip Length**  
16 / 24 mm

**Profile Thickness**  
Door 1.7 mm

**Glazing**  
Max. 30 mm, Min. 26 mm

**Maximum Sash Dimensions**  
Width (L) 2500 mm, Height (H) 3000 mm


**Maximum Sash Weight**  
320 Kg

Consult maximum weight and dimensions according to typologies

POSSIBILITIES



OPENING POSSIBILITIES

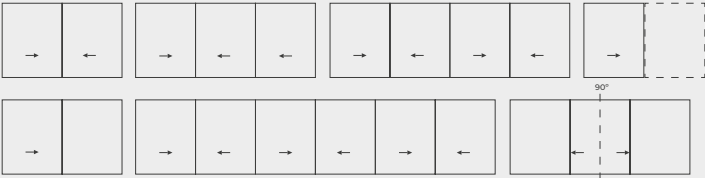

Sliding  
Possibility of 1, 2 or 3 rails  
Possibility of inner and outer corner at 90° without mullion  
Pocket possibility


COR VISION








# 4600 PLUS
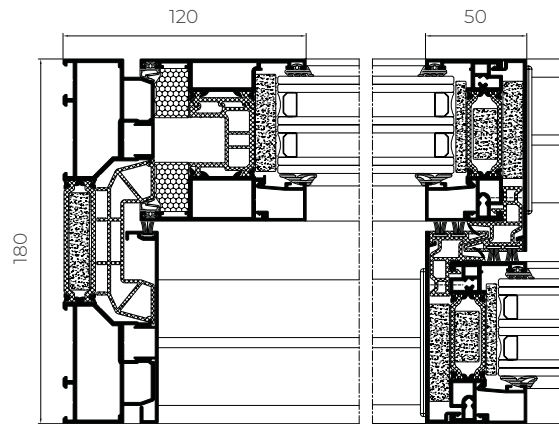
## Lift & Slide

The new 4600 Plus Lift&Slide from Cortizo allows for the covering of large openings while ensuring exceptional thermal insulation. Its 80 mm deep sashes and special polyamides allow it to achieve a Uw transmittance of just 0,65 W/m²K, establishing itself as one of the sliding systems with the best thermal performance on the market. Furthermore, the perimeter interlock profile is reduced to 120 mm, allowing for an increased glazed surface and enhancing the entry of natural light into the rooms.



FEATURES		
Transmittance		Uw ≥ 0.65 (W/m²K)
Acoustic insulation		Rw up to 43 dB
Air permeability		Class 4
Watertightness		Class E750*
Wind resistance		Class C5**

\*Reference test 4.0 x 2.5 m / 1 sash + 1 fixed light  
\*\*Reference test 4.0 x 2.5 m / 2 sashes




**Sightlines**  
Frame 180 mm / 280 mm 3 rails /  
380 mm 4 rails  
Sash 80 mm  
**Glazing**  
Max. 65 mm, Min. 22 mm  
**Maximum Sash Dimensions**  
Width (L) 3300 mm, Height (H) 3500 mm  
**Maximum Sash Weight**  
400 kg

Consult maximum weight and dimensions according to typologies

Sliding  
Thermally broken


### OPENING POSSIBILITIES

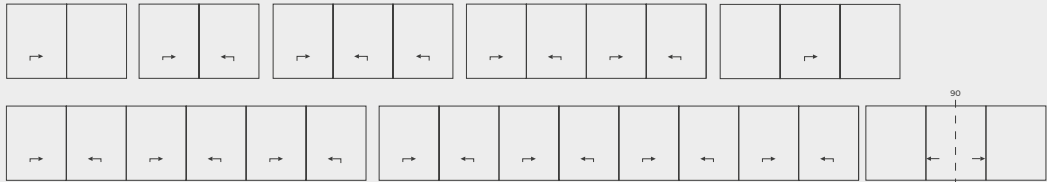

Sliding  
1 rail (1 sash + 1 fixed light), 2, 3 & 4 rails  
Possibility of 90° opening without mullion



4600 PLUS  
LIFT & SLIDE

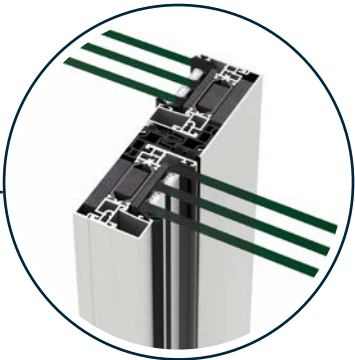

SLIM  
INTERLOCK



Possibility of a **reduced interlock section of 50 mm** in monorail frame (sash + fixed light) and 2 rail frame, allowing a larger glazed surface.



4700

In-line Slider / Lift & Slide

This sliding system, available both in-line slider and lift & slide versions, becomes an ideal solution for closing large spans. It presents modern aesthetics in straight lines, a reduced interlock section and large glazed surfaces that ensure bright and comfortable areas, due to its thermal and acoustic performance.

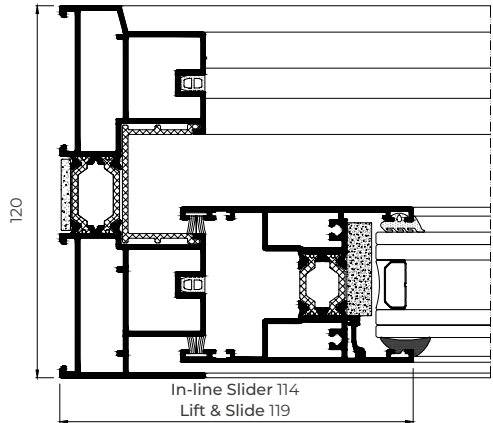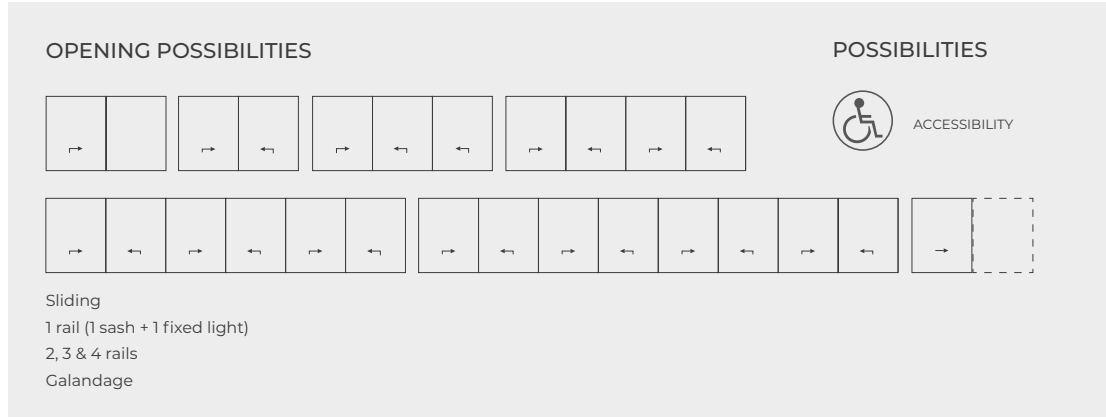

Sliding

Thermally broken

FEATURES		
Transmittance		$U_w \geq 1,0$ (W/m <sup>2</sup> K)
Acoustic insulation		Rw up to 40 dB
Air permeability		Class 3* / 4**
Watertightness		Class 7A
Wind resistance		Class C5* / C2**
Security test		Passed

\* Reference in-line slider test 1,8 x 2,2 m / 2 sashes  
\*\* Reference lift & slide test 4,0 x 2,50 m / 2 sashes  
Security test: Reference test 2,40 x 2,40 m / 2 sashes



4700 SLIDING

**Sightlines**  
Frame 115 and 120 mm, 185 mm 3 rails  
Sash 50 mm

**Polyamide Strip Length**  
20-25 mm

**Profile Thickness**  
Balcony 1.5 mm

**Glazing**  
Max. 36 mm, Min. 26 mm

**Maximum Sash Dimensions**  
Width (L) 2500 mm, Height (H) 3000 mm

**Maximum Sash Weight**  
In-line Slider 280 Kg  
Lift & Slide 300 Kg

Consult maximum weight and dimensions according to typologies



4900 HI

Sliding

Standard sliding system with hinged features. Offers great thermal and acoustic performance favoured by a glazing capacity of up to 36 mm and a thermal break zone of 34 mm. It has an interlock section of 35 mm and straight lines, allowing the sashes to cross over thanks to the integrated handle with multilock system.



OPENING POSSIBILITIES

→

←

→

←

←

→

←

→

←

→

←

→

←

→

←

→

←

→


←

Sliding  
1 rail (sash + fixed light)  
2 and 3 rails  
Pocket possibility  
Possibility of 90° opening without mullion

POSSIBILITIES



ACCESSIBILITY

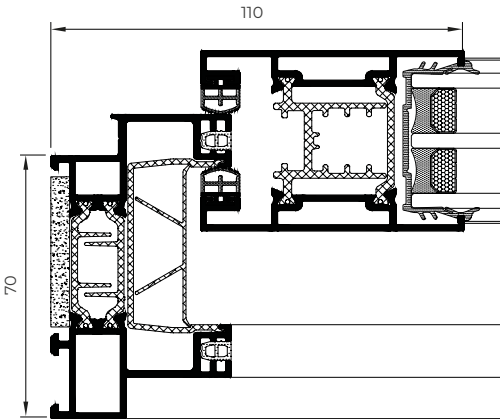

FEATURES

Transmittance		$U_w \geq 1.2 \text{ (W/m}^2\text{K)}$
Acoustic insulation		$R_w$ up to 40 dB
Air permeability		Class 4
Watertightness		Class 7A
Wind resistance		Class C5

Reference test 1.80 x 2.20 m / 2 sashes  
CSTB Laboratory DTA Certification

Sliding

Thermally broken



4900 HI SLIDING

Sightlines

Frame 60, 70, 89, 120, 125, 130 mm  
126, 145 mm 3 rails  
201 mm 4 rails  
Sash 48 mm

Polyamide Strip Length

34 mm

Profile Thickness

Window 1,6 mm

Glazing

Max. 36 mm, Min. 24 mm

Maximum Sash Dimensions

Width (L) 2200 mm

Height (H) 3000 mm

Maximum Sash Weight






240 kg

Consult maximum weight and dimensions according to typologies

4200

Sliding



Standard sliding system with great versatility and straight or curved aesthetics, 45° or 90° sash encounters and various frames according to each configuration. The 45° and 90° sash encounter version allows the total opening of the span with the pocket possibility solution, completely concealing the sashes in the masonry wall's chamber. Furthermore, this version allows the integration of the solar protection Tamiz system on the same frame.

FEATURES		
Transmittance		Uw ≥ 1.5 (W/m²K)
Acoustic insulation		Rw up to 39 dB
Air permeability		Class 3
Watertightness		Class 7A
Wind resistance		Class C5


Reference test 1.20 x 1.20 m / 2 sashes

- Sightlines**  
Frame 60 / 65 / 77 / 80 mm  
106 / 126 mm 3 rails  
Sash 33 / 37 mm  
**Polyamide Strip Length**  
From 14.6 - 20 mm
- Profile Thickness**  
Window 1.5 mm
- Glazing**  
Max. 26 mm, Min. 9 mm

- Maximum Sash Dimensions**  
Width (L) 2200 mm  
Height (H) 2600 mm  
**Maximum Sash Weight**  
100 Kg 45° sash encounter  
200 Kg 90° sash encounter
- Aesthetic possibilities:**  
Sash: Straight or curved  
Bead: Straight or curved
- Consult maximum weight and dimensions according to typologies

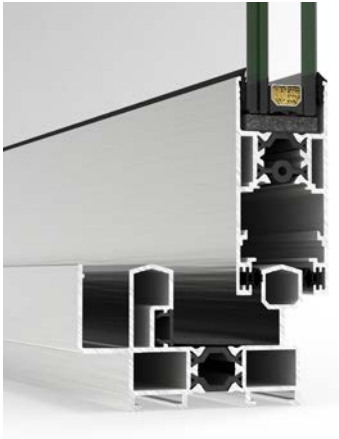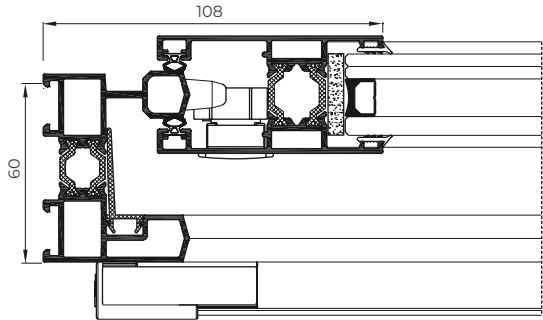

OPENING POSSIBILITIES

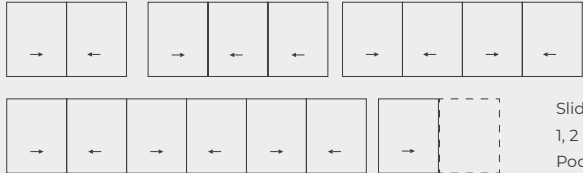

- Sliding
- 1, 2 and 3 rails
- Pocket possibility 1 and 2 rails

- Sliding
- Thermally broken




4200 SLIDING


# 5000

## Double Sliding



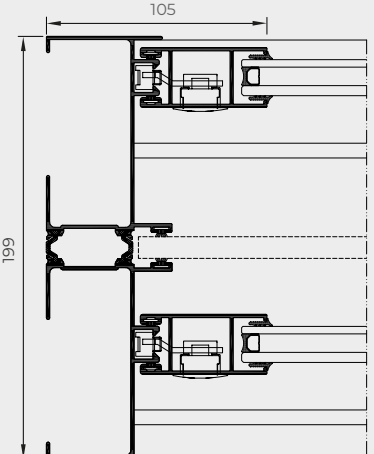


Thermally broken double sliding window system with blind brackets inserted between the exterior and the interior sashes.



OPENING POSSIBILITIES



Sliding


FEATURES		
Transmittance		$U_w \geq 1.3$ (W/m²K)
Acoustic insulation		Rw up to 40 dB
Air permeability		Class 3
Watertightness		Class 8A
Wind resistance		Class C5

Reference test 1.25 x 1.50 m / 2 sashes

**Sightlines**  
Frame 199 mm  
Sash 28 mm  
**Polyamide Strip Length**  
16 and 24 mm  
**Profile Thickness**  
Window 1.25 mm  
**Glazing**  
Max. 18 mm, Min. 4 mm  
**Maximum Sash Dimensions**  
Width (L) 1600 mm  
Height (H) 2600 mm  
**Maximum Sash Weight**  
80 Kg  
Consult maximum weight and dimensions according to typologies








Sliding  
Thermally broken



# 5000

## Sliding / Integral Sliding

Sliding system that integrates the blind bracket into the lateral frame. Also available in standard version.


FEATURES		
Transmittance		$U_w \geq 2.3$ (W/m²K)
Acoustic insulation		Rw up to 34 dB
Air permeability		Class 3
Watertightness		Class 8A
Wind resistance		Class C5

Reference test 1.20 x 1.20 m / 2 sashes

**Sightlines**  
5000 Sliding: Frame 73 mm, Sash 28 mm  
5000 Integral Sliding: Frame 121 mm, Sash 28 mm  
**Profile Thickness**  
Window 1.5 mm  
**Glazing**  
Max. 18 mm, Min. 4 mm

**Maximum Sash Dimensions**  
Width (L) 1600 mm  
Height (H) 2600 mm  
**Maximum Sash Weight**  
80 Kg  
Consult maximum weight and dimensions according to typologies

### OPENING POSSIBILITIES

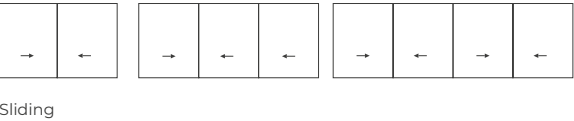



5000 Sliding





5000 Integral Sliding



Sliding






# MEDITERRANEAN

## Balcony

Sliding balcony solution for mild climates with straight aesthetic and 45° sash and frame encounters.

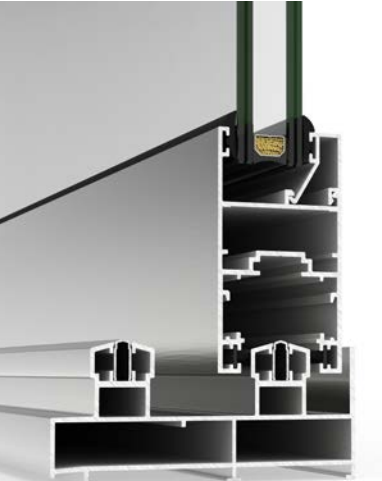


**Sightlines**  
Frame 106 mm / 161 mm tricarril  
Sash 45 mm

**Profile Thickness**  
Balcony 1.5 mm

**Glazing**  
Max. 30 mm, Min. 4 mm

**Maximum Sash Dimensions**  
Width (L) 2200 mm  
Height (H) 2600 mm

**Maximum Sash Weight**  
240 Kg  
Consult maximum weight and dimensions according to typologies

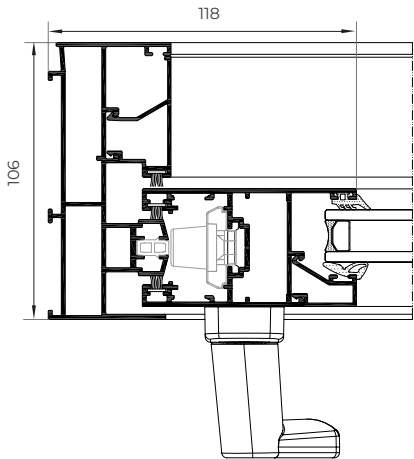

Sliding



OPENING POSSIBILITIES

←

←

→

→

←

→

←

→

←

→

Sliding  
1 rail (sash + fixed light), 2 and 3 rails  
Pocket possibility

FEATURES		
Transmittance		$U_w \geq 2.1 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 35 dB
Air permeability		Class 3
Watertightness		Class 8A
Wind resistance		Class C4

Reference test 1.49 x 1.24 m / 1 sash + 1 fixed light



MEDITERRANEAN BALCONY


# 2000

## Perimetral Sliding

Perimetral sliding system with the possibility of straight, curved or chamfered sashes.



- Sightlines**  
Frame 40 mm 1 rail  
40 / 45 / 60 / 70 mm 2 rails  
80 mm 3 rails  
Straight and Chamfered sash 26 mm  
Curved sash 27.5 mm
- Profile Thickness**  
Window 1.5 mm
- Glazing**  
Max. 17 mm, Min. 3 mm
- Maximum Sash Dimensions**  
Width (L) 1600 mm  
Height (H) 2600 mm
- Maximum Sash Weight**  
160 Kg  
Consult maximum weight and dimensions according to typologies

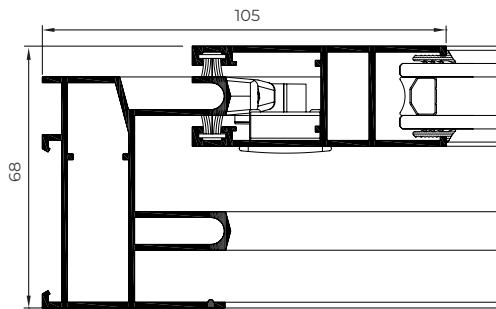

**Aesthetic possibilities:**  
Sash: Straight, curved or chamfered  
Glazing Bead: Straight or curved

FEATURES		
Transmittance		Uw ≥ 2.9 (W/m²K)
Acoustic insulation		Rw up to 33 dB
Air permeability		Class 3
Watertightness		Class 8A
Wind resistance		Class C5

Reference test 1.20 x 1.20 m / 2 sashes

Sliding




# 6200

## Sliding


Sliding system recommended for mild climates with a profile thickness of 1.25 mm and a glazing capacity of 15 mm.



- Sightlines**  
Frame 60 mm  
Sash 22 mm
- Profile Thickness**  
Window 1.25 mm
- Glazing**  
Max. 15 mm, Min. 4 mm
- Maximum Sash Dimensions**  
Window: Width (L) 800 mm, Height (H) 1600 mm  
Balcony: Width (L) 800 mm, Height (H) 2100 mm
- Maximum Sash Weight**  
80 Kg  
Consult maximum weight and dimensions according to typologies

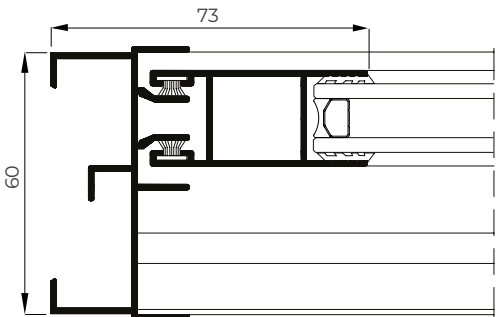

### OPENING POSSIBILITIES

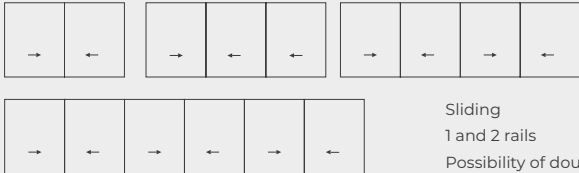

Sliding  
1 and 2 rails  
Possibility of double window

FEATURES		
Transmittance		Uw ≥ 3.2 (W/m²K)
Acoustic insulation		Rw up to 35 dB
Air permeability		Class 3
Watertightness		Class 7A
Wind resistance		Class C3

Reference test 1.12 x 1.15 m / 2 sashes

Sliding



6500


Sliding

Sliding door and window system with an average profile thickness of 1.5 mm for undemanding climates.



- Sightlines**  
Frame 83 mm  
Sash 32 mm
- Profile Thickness**  
Window 1.5 mm  
Door 1.5 mm
- Glazing**  
Max. 17 mm, Min. 4 mm
- Maximum Sash Dimensions**  
Width (L) 1900 mm  
Height (H) 2600 mm
- Maximum Sash Weight**  
140 kg


Consult maximum weight and dimensions according to typologies

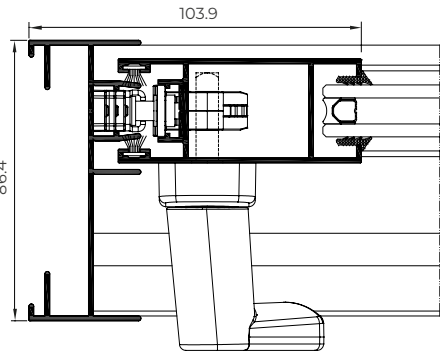

Sliding



OPENING POSSIBILITIES

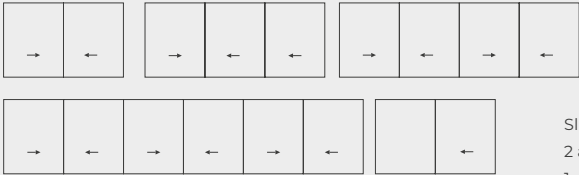

Sliding  
2 and 3 rails  
1 rail Pocket possibility

FEATURES

Transmittance		Uw ≥ 2.2 (W/m²K)
Acoustic insulation		Rw up to 34 dB
Air permeability		Class 3
Watertightness		Class 7A
Wind resistance		Class C4

Reference test 1.48 x 1.30 m / 2 sashes

6500


Plus Sliding

Window and door sliding system that allows an increase of the glazing capacity to up to 30 mm, thus improving the thermal and acoustic performance. Additionally, it has a interlock section of 40 mm that allows a larger glazed surface.

FEATURES

Transmittance		Uw ≥ 2.0 (W/m²K)
Acoustic insulation		Rw up to 36 dB
Air permeability		Class 3
Watertightness		Class 7A
Wind resistance		Class C4

Reference test 1.48 x 1.30 m / 2 sashes

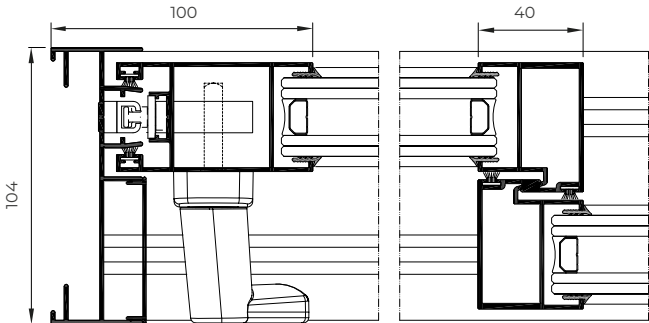


Sliding



- Sightlines**  
Frame 104 mm / 158.1 mm (3 rails)  
Sash 41.6 mm
- Profile Thickness**  
Window 1.5 mm  
Door 1.5 mm
- Glazing**  
Max. 30 mm, Min. 18 mm
- Maximum Sash Dimensions**  
Width (L) 1900 mm, Height (H) 2600 mm
- Maximum Sash Weight**  
240 kg

Consult maximum weight and dimensions according to typologies

OPENING POSSIBILITIES

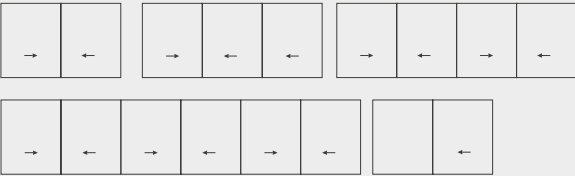

Sliding  
1 rail (sash + fixed light), 2 and 3 rails



2000 PERIMETRAL SLIDING



6500 PLUS SLIDING



contemporary  
enclosures




cortizo **PVC**

# A 84

## Passivhaus HI

Hinged system with 84 mm of frame depth and 6 interior chambers that offers the best thermal performance in the market, with a transmittance value  $U_w$  of only 0.66 W/m²K. This series has been certified by the Passivhaus Institute for cool-temperate category (cold and temperate weather), becoming an ideal solution for low energy consumption buildings. It includes special insulating foams in the sash and frame, disposing of the steel reinforcement to increase transmittance. The glass itself acts as a structural element of the window, fixed to the profile by a special adhesive tape.

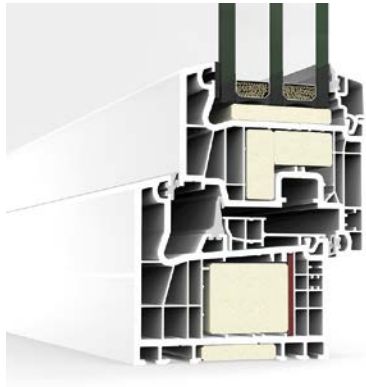

### POSSIBILITIES



SECURITY  
HARDWARE



CONCEALED  
HINGES

#### Sightlines

Frame 84 mm, Sash 84 mm

#### Glazing

Max. 56 mm, Min. 36 mm

#### Maximum Sash Dimensions

Window:

Width (L) 450-1300 mm

Height (H) 450-2200 mm

#### Maximum Sash Weight

Window: 130 kg

Consult maximum weight and dimensions according to typologies

#### Aesthetic possibilities:

Sash: Straight / Bead: Straight or curved

### OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Bottom hung

### FEATURES

Transmittance		$U_w \geq 0.66$ (W/m²K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1500
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes

PVC

# A 84

## Passivhaus 1.0 Thermally broken / Passivhaus 1.0

Certified for the warm-temperate category (warm-temperate weather), it offers a transmittance value  $U_w$  of 0.74 W/m²K, thanks to the use of an internal reinforcement with thermal break.

### FEATURES


Transmittance		$U_w \geq 0.74$ (W/m²K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1500
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes


#### Aesthetic possibilities:

Sash: Straight

Bead: Straight or curved

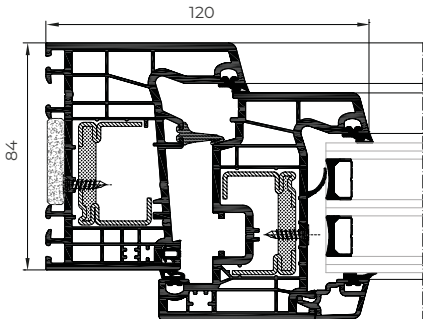

Passivhaus 1.0 Thermally broken

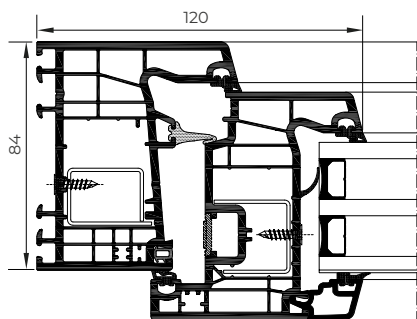

Passivhaus 1.0



### POSSIBILITIES




SECURITY  
HARDWARE



CONCEALED  
HINGES

### OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Tilt & parallel  
Bottom hung

#### Sightlines

Frame 84 mm, Sash 84 mm

#### Glazing

Max. 54 mm, Min. 18 mm

#### Maximum Sash Dimensions

Window:

Passivhaus 1.0 Thermally broken:

Width (L) 450-1400 mm

Passivhaus 1.0 reduced reinforcement:

Width (L) 450-1400 mm

Passivhaus 1.0 Thermally broken

Passivhaus 1.0 reduced reinforcement:

Height (H) 450-2400 mm

Balcony passivhaus 1.0:

Width (L) 450-1400 mm

Height (H) 600-2500 mm

#### Maximum Sash Weight

Window / Balcony: 150 kg






Consult maximum weight and dimensions according to typologies



A 84


Hinged


Hinged system with a 84 mm frame depth and 6 interior chambers with excellent thermal performance, Uw from 0.79 W/m²K, and a great acoustic performance thanks to its glazing capacity of up to 54 mm.


FEATURES		
Transmittance		Uw ≥ 0.79 (W/m²K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1500
Wind resistance		Class C5


Reference test 1.23 x 1.48 m / 2 sashes

POSSIBILITIES








 SECURITY HARDWARE

 CONCEALED HINGES

 ACCESSIBILITY

 CONCEALED DRAINAGE

OPENING POSSIBILITIES




Inward Opening

Side hung  
Tilt & turn  
Tilt & parallel  
Bottom hung

Outward Opening

Side hung (Door)

PVC

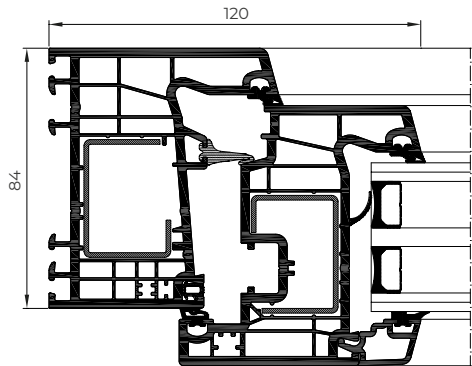

Sightlines

Frame 84 mm

Sash 84 mm

Glazing

Max. 54 mm, Min. 4 mm

Maximum Sash Dimensions

Window:

Width (L) 450-1400 mm

Height (H) 450-2400mm

Balcony:

Width (L) 450-1400 mm

Height (H) 600-2500 mm

Door:

Width (L) 700-1300 mm

Height (H) ≤ 2500 mm

Maximum Sash Weight

150 Kg Window / Balcony

160 Kg Door

Aesthetic possibilities:

Sash: Straight

Bead: Straight or curved

Consult maximum weight and dimensions according to typologies



A 84 PASSIVHAUS





### Sightlines

Frame 84 mm, Sash 84 mm

### Glazing


Max. 46.5 mm, Min. 32 mm  
Glazing: 46.5 mm (Passivhaus)

### Maximum Sash Dimensions

Width (L) 400-1400 mm  
Height (H) 450-2500 mm

### Maximum Sash Weight

130 Kg Window / Balcony  
Consult maximum weight and dimensions according to typologies

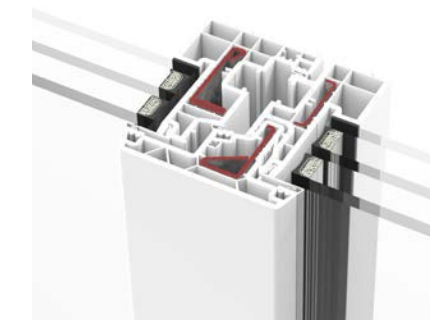

Possibility of 90 mm interlock section

### POSSIBILITIES



SECURITY  
HARDWARE



CONCEALED  
HINGES



ACCESSIBILITY  
(A 84 HIDDEN SASH)



CONCEALED DRAINAGE  
(A 84 HIDDEN SASH)

### OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Bottom hung

## A 84

### Hidden Sash Passivhaus

Minimalist window with a lateral sightline of only 90 mm and possibility of reduced central sightline of the same measure. This system with 84 mm of frame depth and 6 interior chambers combines elegant design with excellent thermal performance, in the Passivhaus version certified for the warm-temperate category ( $U_w$  from  $0.71 \text{ W/m}^2\text{K}$ ) as well as in the standard version ( $U_w$  from  $0.74 \text{ W/m}^2\text{K}$ ).



A 84 Hidden Sash Passivhaus




A 84 Hidden Sash

### FEATURES


Transmittance Passivhaus		$U_w \geq 0.71 \text{ (W/m}^2\text{K)}$
Transmittance Standard		$U_w \geq 0.74 \text{ (W/m}^2\text{K)}$
Acoustic insulation		$R_w$ up to 46 dB
Air permeability		Class 4
Watertightness		Class E2250
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes

### A 84 HIDDEN SASH

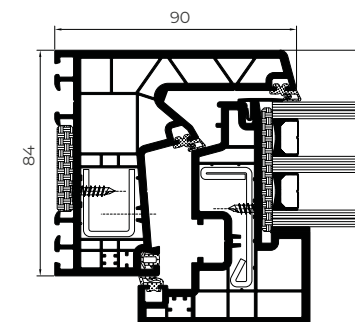

A 84 Hidden Sash Passivhausvhaus

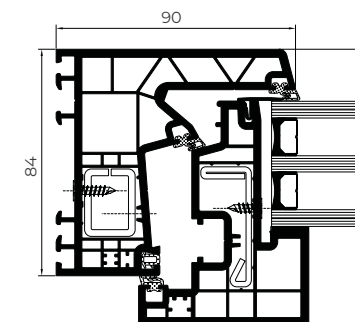


A 84 Hidden Sash



# A 78

## Hinged / Passivhaus 1.0 Hinged


PVC window, door and balcony door system with straight-line aesthetics on the frame, sash and glazing beads (straight or mitre cut). It features excellent thermal and acoustic performance thanks to its 78 mm deep profiles with six chambers and a glazing capacity of up to 48 mm. This system also features new gaskets that improve the welding process at the profile joints. The Passivhaus version is an ideal solution for low-energy consumption homes.

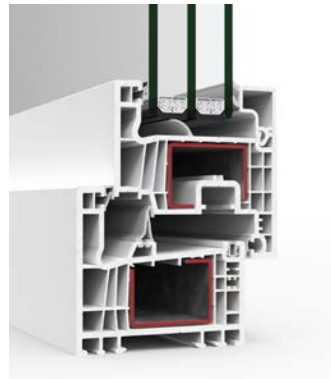


A 78 Hinged



A 78 Passivhaus 1.0 Hinged

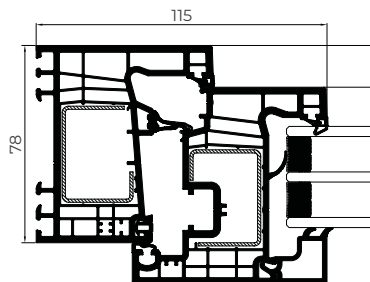

A 78 Hinged

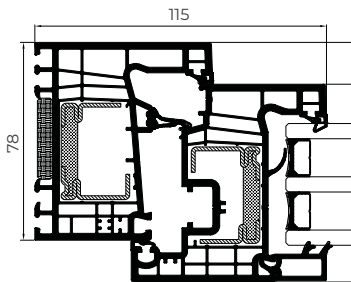

A 78 Passivhaus 1.0 Hinged



FEATURES		
Transmittance Passivhaus		Uw ≥ 0.74 (W/m²K)
Transmittance		Uw ≥ 0.80 (W/m²K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1800
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes

### POSSIBILITIES



SECURITY  
HARDWARE



CONCEALED  
HINGES



ACCESSIBILITY



CONCEALED DRAINAGE

### OPENING POSSIBILITIES



Inward Opening

Side hung  
Tilt & turn  
Tilt & parallel  
Bottom hung

### A 78 HINGED



### Sightlines

Frame 78 mm, Sash 78 mm

### Glazing

Max. 48 mm

### Maximum Sash Dimensions

#### Hinged

Window: Width (L) 400-1400 mm, Height (H) 450-2450 mm

Balcony door: Width (L) 400-1400 mm, Height (H) 600-2500 mm

Door: Width (L) 700-1300 mm, Height (H) 2500 mm

#### Passivhaus 1.0

Window: Width (L) 400-1400 mm, Height (H) 450-2200 mm

Balcony: Width (L) 400-1400 mm, Height (H) 600-2300 mm

### Maximum Sash Weight

150 kg Window / Balcony door

160 Kg Door (Hinged)

Consult maximum weight and dimensions according to typologies



A 70

Hinged

Hinged system with 70 mm of frame depth with a maximum glazing capacity of 42 mm. The 5 interior chambers in the frame and sash allows for great energy efficiency with a transmittance value Uw from 0.9 W/m²K. Possibility of straight, curved or chamfered sashes.



Straight Sash



Chamfered Sash



Curved Sash

Sightlines

Frame 70 mm  
Sash 70 / 80 mm

Glazing

Max. 42 mm / Min. 4 mm

Maximum Sash Dimensions

Window:

Width (L) 360 - 1300 mm

Height (H) 450 - 2300 mm

Balcony:


Width (L) 360 - 1300 mm

Height (H) 600 - 2400 mm


Door:

Width (L) 700 - 1300 mm

Height (H) 600 - 2500 mm

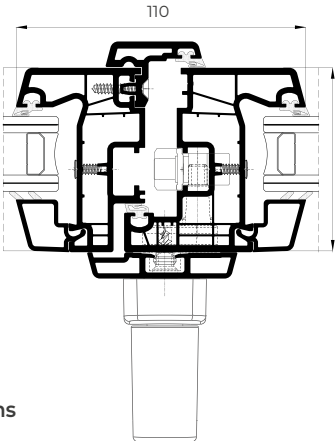

Possibility of  
centred handle

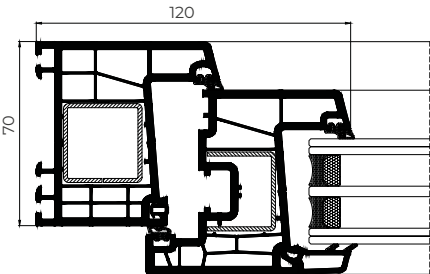

Maximum Sash Weight

130 kg Window

130 Kg Balcony

160 Kg Door

Aesthetic possibilities

Sash: Straight, curved or chamfered

Bead: Straight or curved



Consult maximum weight and dimensions according to typologies



PVC



OPENING POSSIBILITIES



Outward Opening

Side hung  
Top hung

Inward Opening

Side hung  
Tilt & turn  
Bi-fold  
Tilt & parallel  
Bottom hung

POSSIBILITIES



SECURITY  
HARDWARE



ACCESSIBILITY




CONCEALED  
DRAINAGE

FEATURES


Transmittance		Uw ≥ 0.9 (W/m²K)
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1800
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes  
CSTB Laboratory DTA Certification

A 70 HINGED

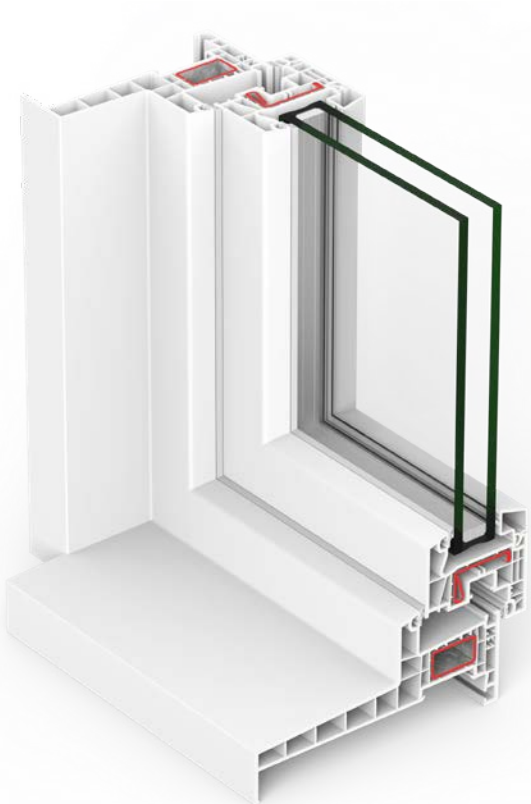

Monoblock

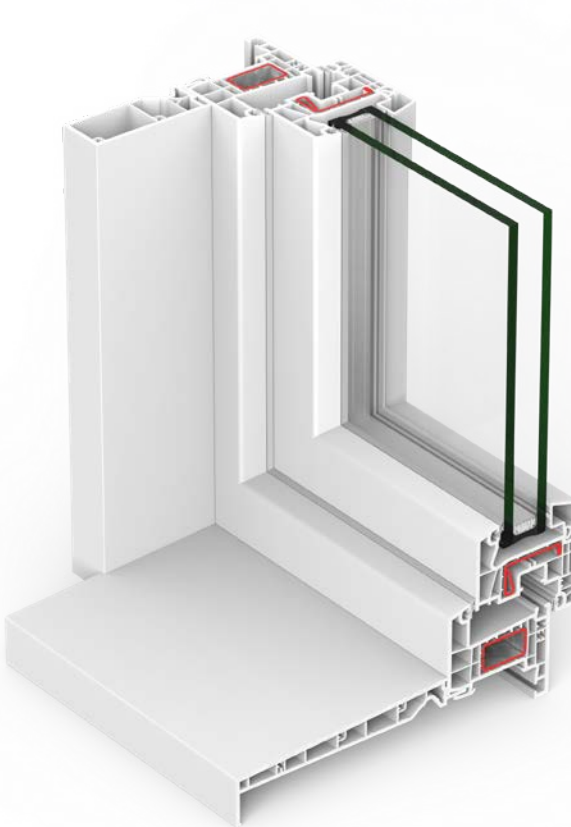


Cap

PVC




CORTIZO QUALITY PVC

**Class A**  
Main walls thickness:  
3 mm

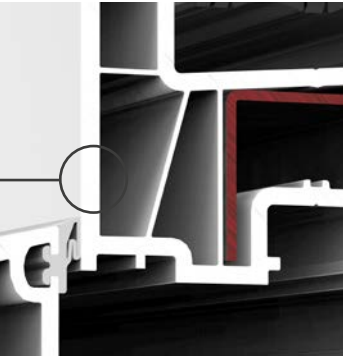

**Class S**  
**Climatic zones**  
7 parts of titanium dioxide.  
Maximum resistance to solar incidence

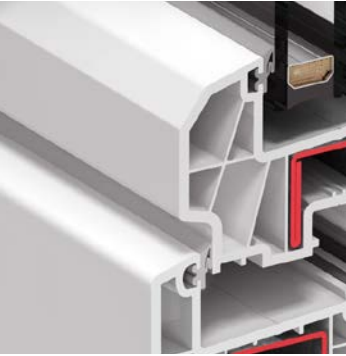

**Class II**  
**Impact resistance**  
Maximum profile hardness


A 70 HINGED




# ALCOVER

Mixed window system that multiplies the aesthetic possibilities of the PVC A 70 series, covering the external face of the window with an aluminium profile clipped on the frame and sash, with 45° or 90° profile encounters.

This solution, ideal for rehabilitation, allows the combination of the excellent performance of PVC systems and the great variety of powder-coated and anodized finishes aluminium offers.

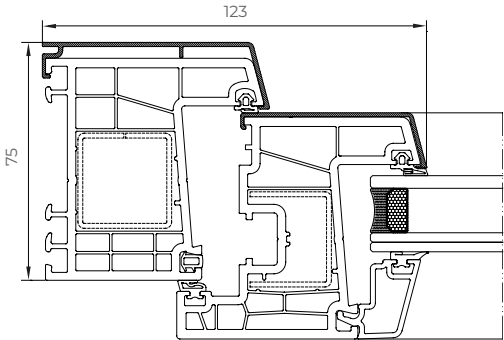

## OPENING POSSIBILITIES



Inward opening  
Side hung  
Tilt & turn  
Bottom hung

## FEATURES

Transmittance		$U_w \geq 0.9 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 46 dB
Air permeability		Class 4
Watertightness		Class E1800
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes

PVC

## POSSIBILITIES



## Sightlines

Frame 75 mm, Sash 71 mm

## Glazing

Max. 42 mm, Min. 18 mm

## Maximum Sash Dimensions

Window:

Width (L) 360 - 1300 mm

Height (H) 450 - 2300 mm

Balcony:

Width (L) 360 - 1300 mm

Height (H) 600 - 2400 mm

## Maximum Sash Weight

130 kg Window

130 Kg Balcony


Consult maximum weight and dimensions according to typologies



Alcover 45° profile encounters



Alcover 90° profile encounters

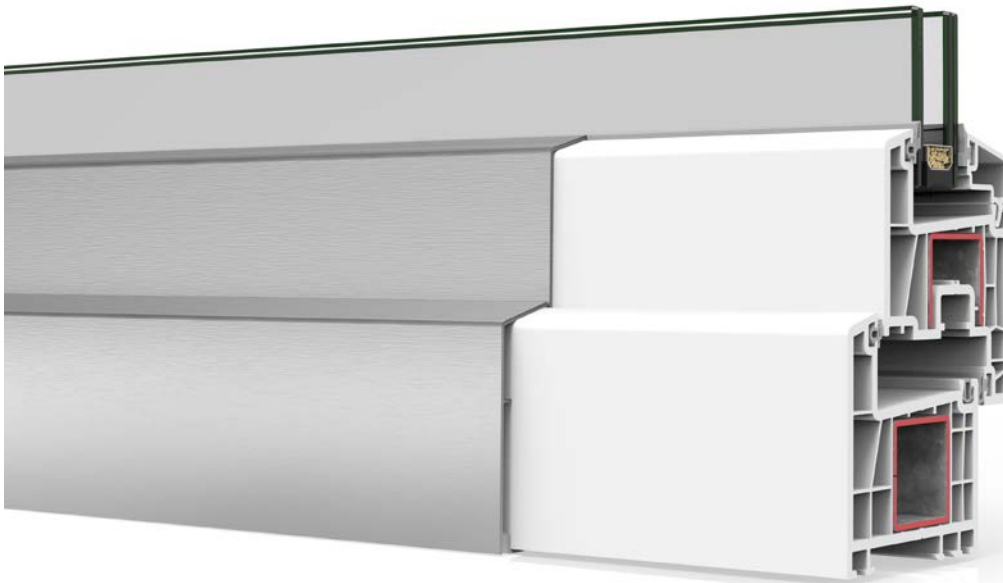






PVC



C 70


Sliding


Sliding window and balcony system with 70 mm of frame depth and optimal thermal and acoustic performances. Possibility of minimalist sash with only 30 mm of interlock profile.

FEATURES		
Transmittance		Uw ≥ 1.3 (W/m²K)
Acoustic insulation		Rw up to 38 dB
Air permeability		Class 4
Watertightness		Class 7A
Wind resistance		Class C5

Reference test 1.23 x 1.48 m / 2 sashes

POSSIBILITIES

 SECURITY HARDWARE

 ACCESSIBILITY

OPENING POSSIBILITIES

→

←

→

↔

←

→

←

→

←

→

←

→



←

→

←

Sliding

PVC

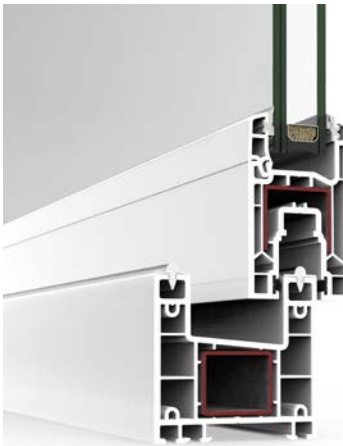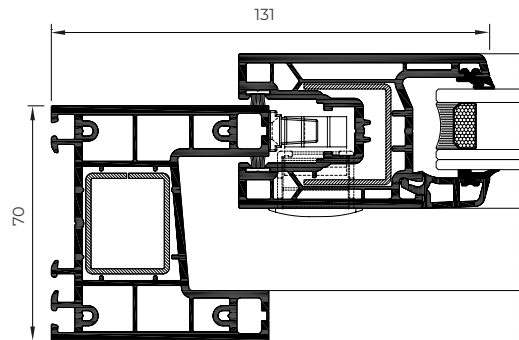


**Sightlines**  
Frame 70 mm, Sash 46 mm

**Glazing**  
Max. 28 mm, Min. 4 mm


**Maximum Sash Dimensions**  
Window:  
Width (L) 1400 mm  
Height (H) 1800 mm  
Balcony:  
Width (L) 1800 mm  
Height (H) 2600 mm

**Maximum Sash Weight**  
70 kg Window  
200 Kg Balcony


Consult maximum weight and dimensions according to typologies

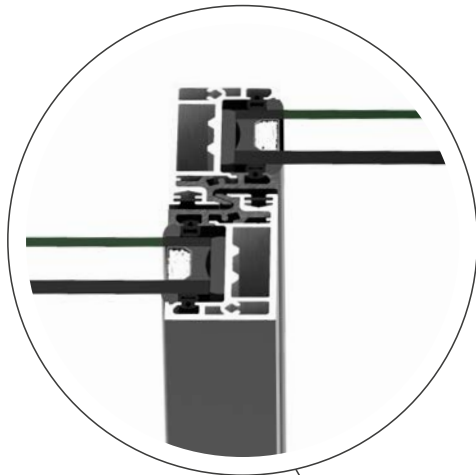

**SLIM CENTRAL SECTION**  
Possibility of slim central section of 30 mm

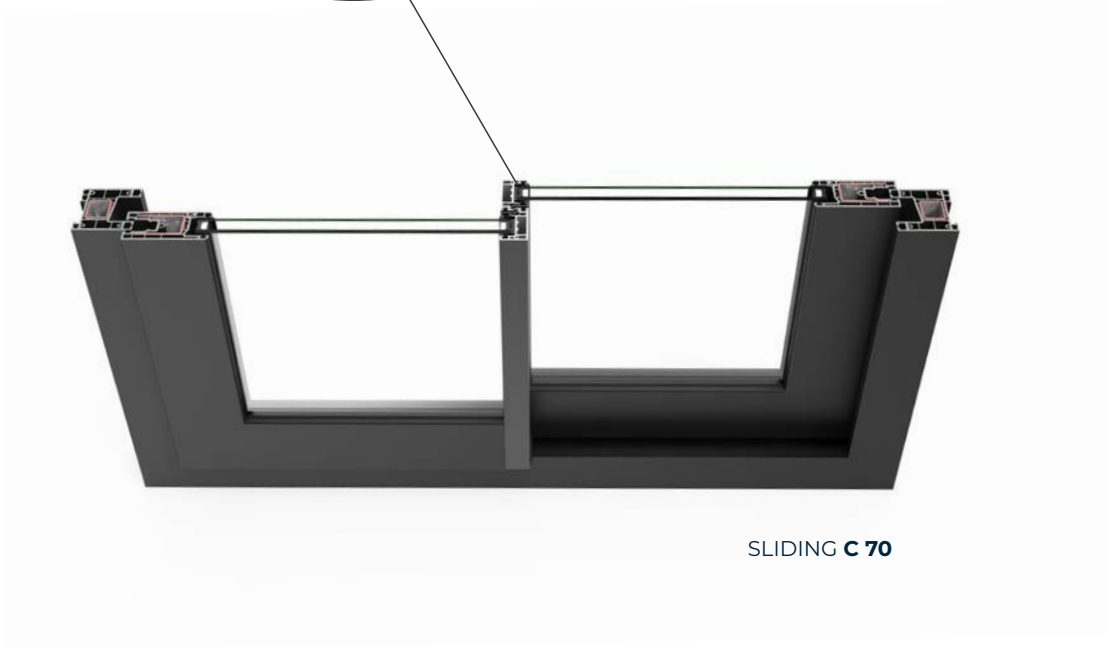

SLIDING C 70

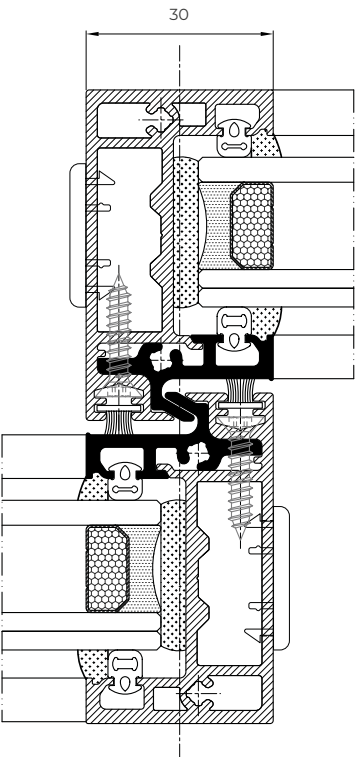

E 170

Lift & Slide

Designed for large span enclosures with sashes of up to 3 m wide and 2.80 m high. It includes a hardware system that slightly elevates the sash when the handle is operated, facilitating its movement in the opening and closing motions. This system has a frame depth of 170 mm and a maximum glazing capacity of 40 mm, offering remarkable thermal and acoustic performances.




- Sightlines**  
Frame 170 mm, Sash 70 mm
- Glazing**  
Max. 40 mm, Min. 18 mm
- Maximum Sash Dimensions**  
Width (L) 3300 mm, Height (H) 2800 mm
- Maximum Sash Weight**  
300 kg  
Consult maximum weight and dimensions according to typologies

FEATURES		
Transmittance		Uw ≥ 0.9 (W/m²K)
Acoustic insulation		Rw up to 42 dB
Air permeability		Class 4
Watertightness		Class 7A

Reference test 3.5 x 2.5 m / 1 sash + 1 fixed light


PVC

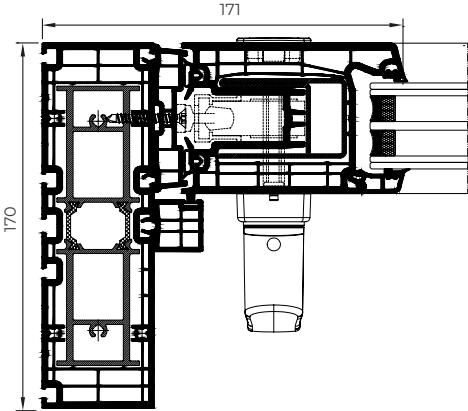

POSSIBILITIES



OPENING POSSIBILITIES

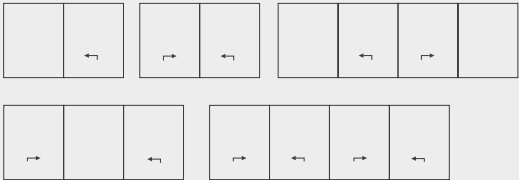

Lift & slide system of 1, 2 and 4 sashes

E 170 LIFT & SLIDE




# E 170


## Lift & Slide

Designed for large span enclosures, this series evolves in its design towards a minimalist aesthetic where the perimeter sightline of the sash has been reduced and it features an interlock of only 50 mm. Additionally, it incorporates new solutions, such as the PRM threshold to facilitate accessibility, and the water collection channel for terraces.

PVC

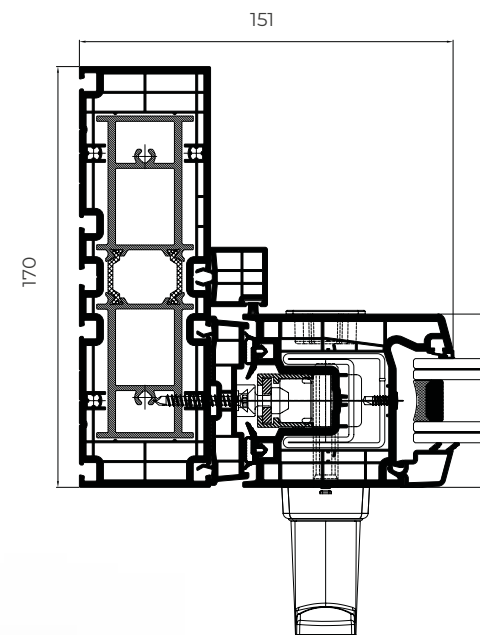

## E 170 LIFT & SLIDE






REDUCED INTERLOCK  
50 mm




CORTIZO ISOLATION

Roller Shutter Box


This system, exclusive to all CORTIZO PVC series, offers the best thermal insulation in the market with a transmittance value  $U_{sb}$  from 0.66 W/m²K, rounding off the catalogue of enclosure systems for zero-energy buildings. Additionally, it offers excellent acoustic performance with a noise attenuation of up to 44 db, and an elegant design with maximum quality materials and accessories.

FEATURES		
Air permeability		Class 4
Watertightness		Class E2400
Wind resistance		Class 3000 Pa (P3)

Reference test 200 x 230 mm (height x depth) and 1230 mm length  
Reference test 160 x 180 mm (height x depth) and 1230 mm length




Thermal insulation





Thermal-acoustic insulation




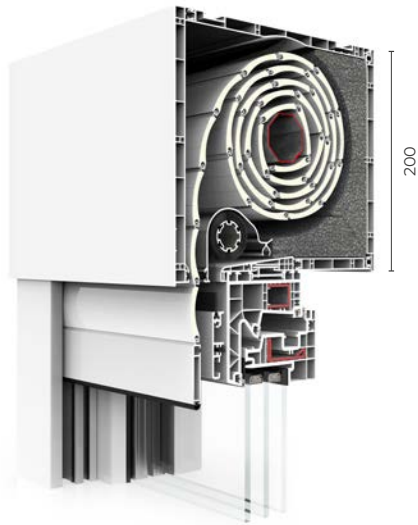

Lateral Connection Link Rod  
Longitudinal Stability



ROLLER SHUTTER BOX 200 mm		
Transmittance		$U_{sb} \geq 0.66 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 44 dB

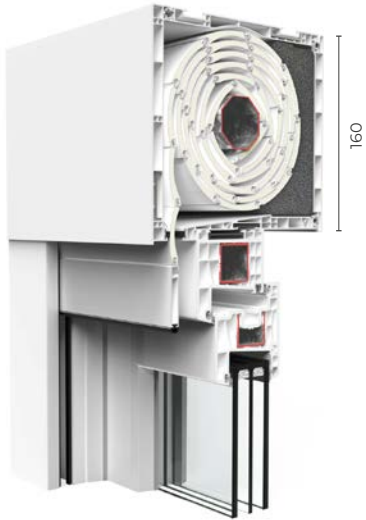Reference test 200 x 230 mm (height x depth) and 1230 mm length



ROLLER SHUTTER BOX 160 mm		
Transmittance		$U_{sb} \geq 0.97 \text{ (W/m}^2\text{K)}$
Acoustic insulation		Rw up to 47 dB

Reference test 160 x 180 mm (height x depth) and 1230 mm length



Frontal Register



Bottom Register

Register options (roller shutter box 200 mm) Frontal, Bottom  
Register options (roller shutter box 160 mm) Frontal

Maximum dimensions (roller shutter box 200 mm)  
Width (L) 2400 mm (3800 mm with divider)  
Height (H) 2600 mm (2800 mm with centred side frame)


Maximum dimensions (roller shutter box 160 mm)  
Width (L) 2400 mm (3800 mm with divider)  
Height (H) 1710 mm

Versatility  
Possibility of using roller shutters with profiled, extrusion, or self-locking extrusion louvres.  
Possibility of motorised or manual roller shutters activated by belt or cardan.  
Possibility of integrated mosquito net.

Check maximum weight and dimensions according to typologies



Profile junction  
Provided with a hidden sealing gasket  
Registered and exclusive water-tightness system ®

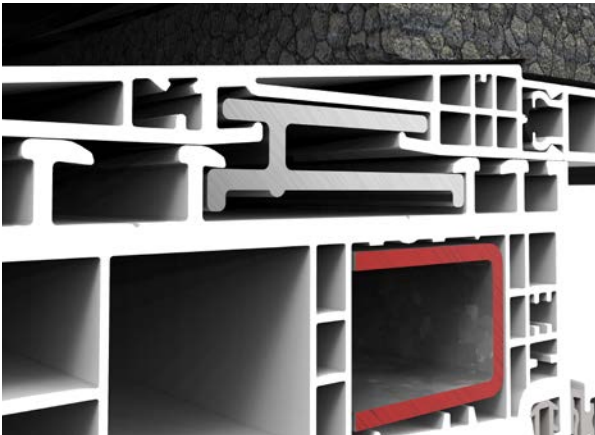


Connection profile in aluminium  
Longitudinal Stability

# CASSONETTO

## Renovation Shutter Box

Cortizo Cassonetto renovation shutter box, consisting of PVC-U finishing profiles and specific panels for the access cover, has been designed to improve the integration of roller shutter systems with the window in renovation and new construction projects.

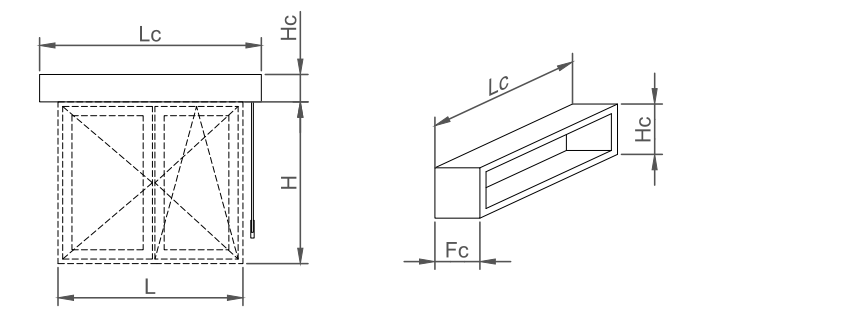

RENOVATION SHUTTER BOX LIMITS (mm)	Lc (min)	Lc (max)	Fc (max)	Hc (max)
Renovation shutter box with louvre (Ref.: 1480-1)	600	3600	300	300
Renovation shutter box with PS24 sandwich panel	600	3600	300	500
Renovation shutter box with P10 solid panel	600	3600	300	500



contemporary  
enclosures



façade systems



Cortizo Technological Campus is a breeding ground for innovation created with the aim of becoming an international benchmark in the design of aluminium façades for worldwide large-scale architectural projects. There, a multidisciplinary team of 250 engineers, architects and technical architects will carry out their activity, focusing on the design of high-value added envelopes to meet the global demand for sustainable architecture.



\_ Cortizo Technological Campus  
**Spain**

## DESIGN

Development of bespoke profiles, preparation of details and on-site installations. Calculation and sizing of profiles, Widthring, accessories, composite panels, and glazing. 3D visualisation and rendering.



## PERFORMANCE

The tests carried out at CORTIZO's Technological Campus allow for the assessment of the façades performance against the most extreme conditions: earthquakes, hurricanes, fires... Additionally, in this laboratory, the thermal and acoustic performance of all developed systems is also tested, as well as their behaviour in air, watertightness and wind tests

## COMPREHENSIVE ASSISTANCE


85 engineers provide the necessary technical assistance at every stage of the project, from the initial design phase, calculations, and pricing, to planning and delivery control.








UNIT 66

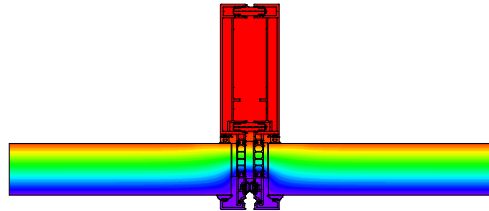

MODULAR FAÇADE

Thermally broken façade system suitable for high rise enclosure projects. This solution combines excellent performance with a wide range of custom designs, offering great aesthetic versatility with option of “glass only” or “seen profile” with an interlock profile of 66 mm. Its fixing bracket has three-dimensional regulation, facilitating its installation.




FEATURES		
Transmittance		$U_{cw} \geq 0.6 \text{ (W/m}^2\text{K)}$
Air permeability		Class AE
Watertightness		Class REI200
Wind resistance *		Passed
Impact resistance		I5 / E5
* Design loading 2000 Pa-Security loading 3000 Pa		



OPENING POSSIBILITIES

- 
- 
- Outward Opening
- Hidden top hung
- Hidden parallel opening



**Maximum weight:** 350 kg  
**Glazing:** 58 mm  
**Interlock profile:** 66 mm or 76 m  
**Thermal break zone:**  
25 mm - 40 mm  
**Separation between modules:**  
10 or 20 mm  
**Maximum dimensions:**  
Width (L) 1500 mm, Height (H) 3700 mm

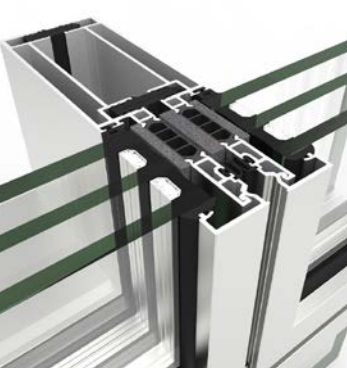


Beaded version

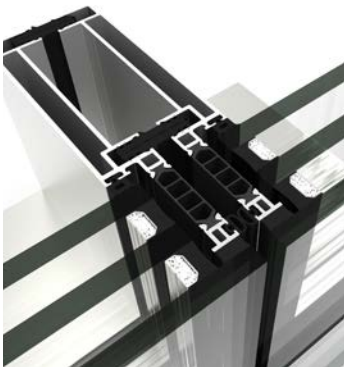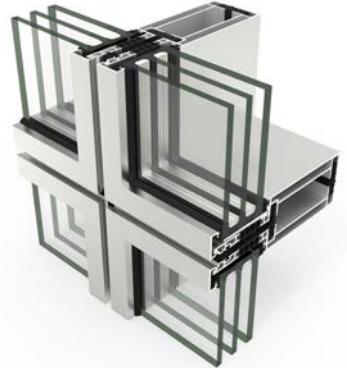

Structural version

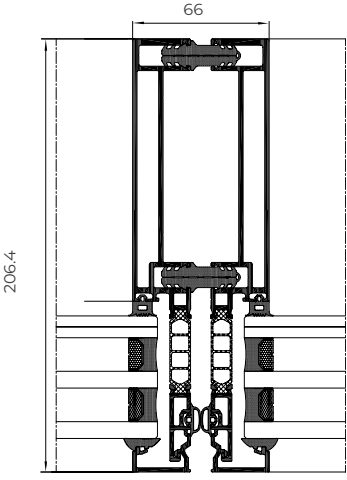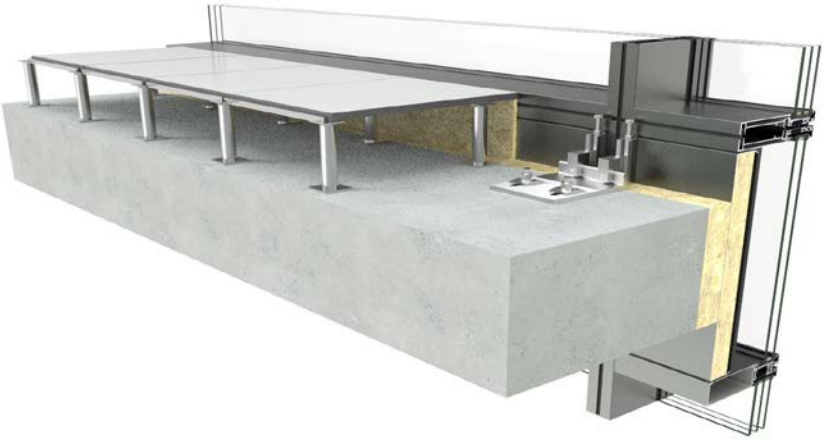


Standard version

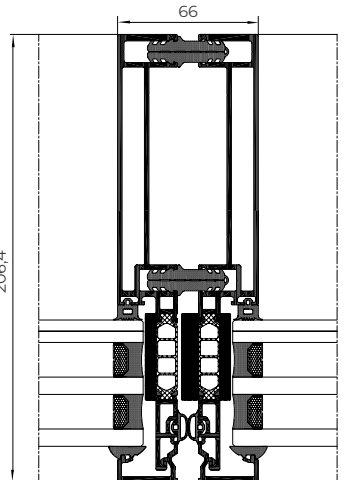

High insulation version



## FAÇADES

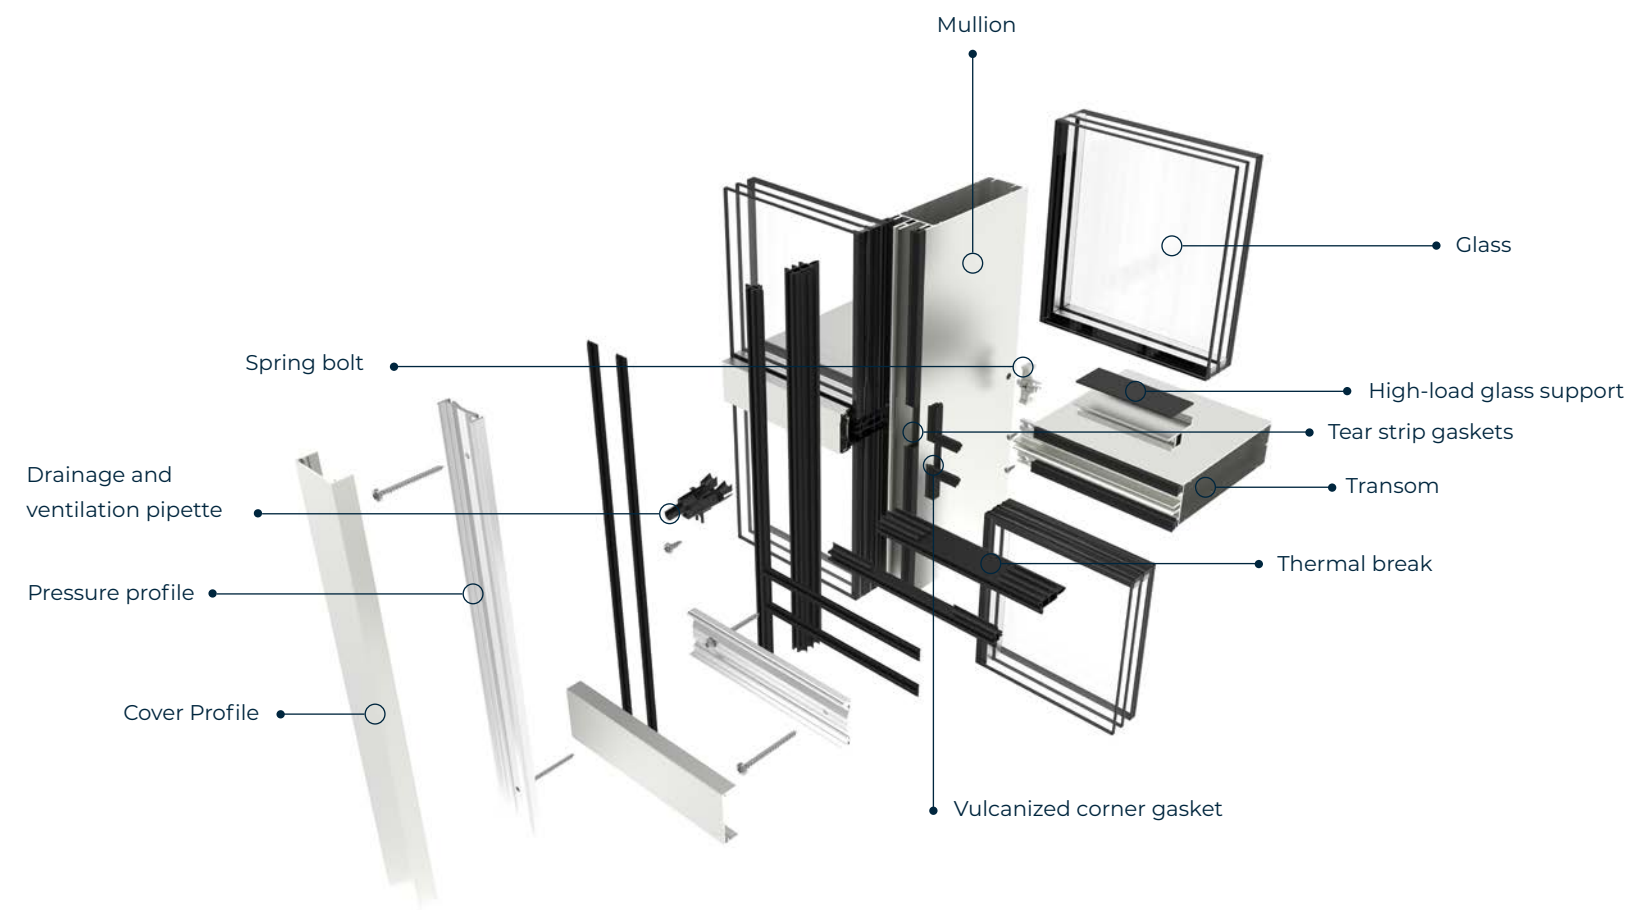

## STICK 62 FAÇADES

CORTIZO extends its stick façades catalogue, adding new versions with mullions and transoms of 62 mm for the systems TP, TPH, TPV and SG. This range of curtain walls uses profiles which offer more inertia and allow the installation of bigger and heavier glasses, improving their fixation against potential movements of the structure. The 62 mm CORTIZO façades also present stronger unions between mullions and transoms, as well as an Widthring designed for tolerating bigger weight and wind loads than the 52 mm versions.

TP 62



SG 62



TPH 62



TPV 62



## WATER-TIGHTNESS ELEMENTS

Two plastic accessories are used to guide the water from possible condensation towards the exterior:

### Continuity piece

It carries the water that descends from the upper mullion's drainage channels over to the one immediately below in the fillet zone between them.

### Pipette

Collects the water from the mullion's (and, generally, from the annexed transoms') drainage channels and expels it into the space between the pressor and the cover, away from the areas that are affected by Watertightness. Suitable for the TP 52 and TPV 52 systems.

In order to ensure Watertightness in the mullion-transom meeting points, CORTIZO façades offer two solutions:

### Tear strip gaskets

Located inside the mullion with a crease that enables partial tearing in the meeting point with the transom, without leaving the union of the horizontal and vertical profile unprotected.

### Vulcanized corner gasket

This piece is obtained through moulding, which allows the integration of the gaskets of different mullion and transom thickness and, at the same time, isolates the contact zone of the vertical and horizontal profiles.



Continuity piece



Pipette



Tear strip gaskets



Totally vulcanized corner

## DRAINAGE LEVELS

CORTIZO façades have been designed so that the drainage channels of mullions and transoms of different levels are found in different planes. By doing this, the possible condensations will be led from the transoms' outer channels to the mullions and, from there, towards the exterior through the continuity pieces and the pipettes. These same channels are used, simultaneously, to internally ventilate the four sides of the glass.




ARCH  
INVISIBLE  
FACADES

### New handle embedded into the profile

Minimalist design invisible from the frontal view.

Available for top hung and parallel openings in the CORTIZO façade systems TP, TPH, TPV, SG of 52 and 62 mm.







TP 52 FAÇADE


## TP 52 FAÇADE

Light façade system composed of 52 mm mullions and transoms that form the support structure. The glass is fixed at its four sides by a continuous pressure profile that is externally screwed to the screw ports incorporated in the mullions and transoms, concealing the entire fixing system under an embellishing profile or cover with an interlock profile of 52 mm.

### FEATURES

Transmittance		$U_{cw} \geq 0.6 \text{ (W/m}^2\text{K)}$
Air permeability		Class AE
Watertightness		Class RE1350
Wind resistance *		Passed

Reference test 3,00 x 3,50 m  
Certification CWCT British Standard  
\* Design loading 2000 Pa-Security loading 3000 Pa

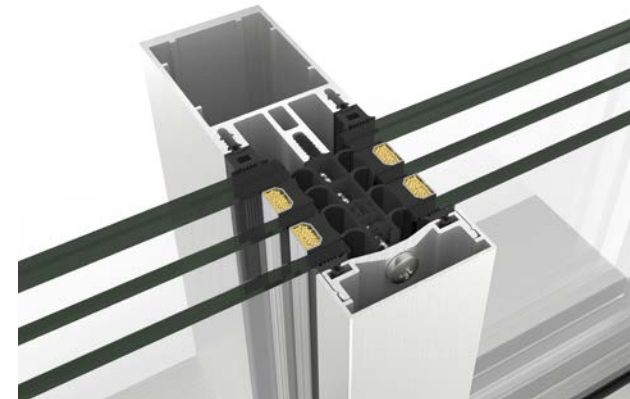

### Glazing

Max. 64 mm, Min. 4 mm

### Sightlines

Mullion 52 mm

Transom 52 mm

### Profile Thickness

Mullion 2.1 and 3.0 mm

Transom 2,1 mm

### Thermal Break Zone

6, 12 and 30 mm stackable profiles

### Cover

85 mm deep elliptical cover

H shape cover, 34 mm deep

Rectangular cover: 14, 19 100 & 145 mm deep

Flat cover

Pyramid shape cover, 155 mm deep

### Minimum / Maximum opening dimensions

#### Hidden Top Hung:


Width (L) 2500 - 500 mm, Height (H) 2500 - 650 mm

#### Hidden Side Hung / Tilt & Turn:


Width (L) 1400-500 mm, Height (H) 1900-600 mm

#### Hidden Parallel:

Width (L) 1500-450 mm, Height (H) 3000-650 mm

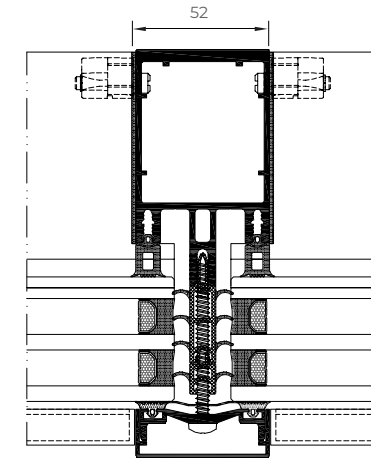

### OPENING POSSIBILITIES



#### Outward Opening

Hidden top hung  
Hidden parallel

#### Inward Opening

Hidden side hung / tilt & turn

### Maximum Weight

200 kg Parallel opening

180 kg Hidden top hung opening

100 Kg Tilt & turn opening


750 Kg Fixed glazing



SG 52  
FAÇADE

Curtain wall system with a glass only external aesthetic, this glass is fixed to the supporting profiles by a combination of clips and a U profile fitted into the glazing chamber.

FEATURES		
Transmittance		Ucw ≥ 0.6 (W/m²K)
Air permeability		Class AE
Watertightness		Class RE1500
Wind resistance *		Passed
Reference test 3,00 x 3,50 m Certification CWCT British Standard * Design loading 2000 Pa-Security loading 3000 Pa		

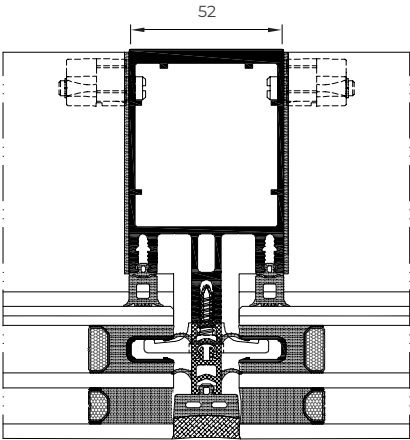

- Glazing**  
Max. 64 mm, Min. 6 mm
- Sightlines**  
Mullion 52 mm  
Transom 52 mm
- Profile Thickness**  
Mullion 2,1 and 3,0 mm  
Transom 2,1 mm
- Thermal break zone**  
6, 12 and 30 mm stackable profiles



- Minimum / Maximum opening dimensions**  
Maximum Width (L) 2500 mm  
Minimum Width (L) 500 mm  
Maximum Height (H) 2500 mm  
Maximum Height (H) 650 mm
- Maximum Weight**  
180 kg Hidden top hung opening  
750 Kg Fixed lights

OPENING POSSIBILITIES

- Outward Opening
- Hidden Top Hung

Façades



SG 52 FAÇADE







TPH 52 FAÇADE

## TPH 52 FAÇADE

Façade solution based on the combination of the TP 52 and SG 52 systems. The glass is fixed by the pairing of the pressure profile and the cover profile on the horizontal gaskets, and it uses clips and the U-profile for its vertical edge.




### OPENING POSSIBILITIES




Outward Opening  
Hidden Top Hung

FEATURES		
Transmittance		Ucw ≥ 0,6 (W/m²K)
Air permeability		Class AE
Watertightness		Class RE1500
Wind resistance *		Passed

Reference test 3,00 x 3,50 m  
Certification CWCT British Standard  
\* Design loading 2000 Pa-Security loading 3000 Pa

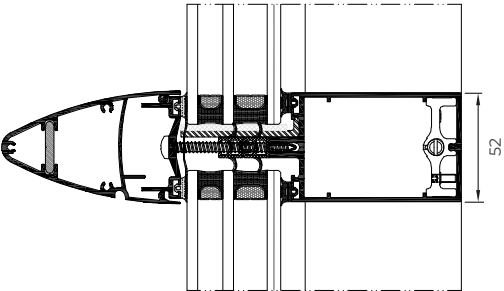



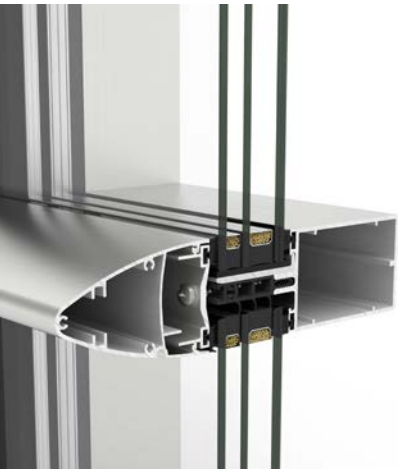

- Glazing**  
Max. 64 mm, Min. 6 mm
- Sightlines**  
Mullion 52 mm  
Transom 52 mm
- Profile Thickness**  
Mullion 2,1 and 3,0 mm  
Transom 2,1 mm
- Covers**  
Flat cover  
Rectangular cover: 14, 19 100 & 145 mm deep  
H shape cover, 34 mm deep  
85 mm deep elliptical cover
- Minimum / Maximum opening dimensions**  
Hidden Top Hung:  
Maximum Width (L) 2500 mm  
Minimum Width (L) 500 mm  
Maximum Height (H) 2500 mm  
Minimum Height (H) 650 mm
- Maximum Weight**  
180 kg Hidden top hung opening  
750 Kg Fixed lights





TPV 52  
FAÇADE

Curtain wall system based on the combination of the TP 52 and SG 52 systems. The glass is fixed by the pairing of the pressure profile and the cover profile on its vertical edge, and it uses clips and the U-profile for the horizontal gaskets.

FEATURES		
Transmittance		Ucw ≥ 0,6 (W/m²K)
Air permeability		Class AE
Watertightness		Class RE1500
Wind resistance *		Passed

Reference test 3,00 x 3,50 m  
Certification CWCT British Standard  
\* Design loading 2000 Pa-Security loading 3000 Pa



Glazing

Max. 64 mm, Min. 6 mm

Sightlines

Mullion 52 mm

Transom 52 mm

Thermal Break Zone

6, 12 and 30 mm stackable profiles

Profile Thickness

2,1 and 3,0 mm

2,1 mm

Covers

Flat cover


H shape cover, 34 mm deep

Rectangular cover: 14, 19 100 & 145 mm deep

Maximum Weight

180 kg Hidden top hung opening

750 Kg Fixed lights

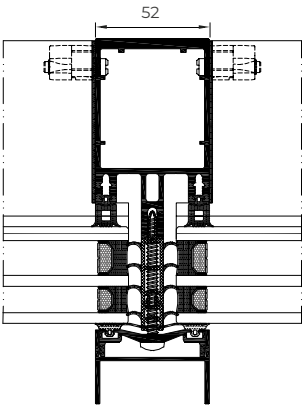

Minimum / Maximum opening dimensions

Top Hung Opening

Max. Width (L) 2500 mm, Min. Width (L) 500 mm

Max. Height (H) 2500 mm, Min. Height (H) 650 mm



OPENING POSSIBILITIES



Outward Opening

Hidden Top Hung



Façades



TPV 52 FAÇADE


ST 52  
FAÇADE

In this façade system, the glass is glued with structural silicone to an aluminium frame, which is then glued to the main structure. It has an open groove glass only external aesthetic with EPDM gaskets in the perimeter of each module in order to guarantee Watertightness. An overlap closes the space between the gaskets.

OPENING POSSIBILITIES



Outward Opening  
Hidden Top Hung

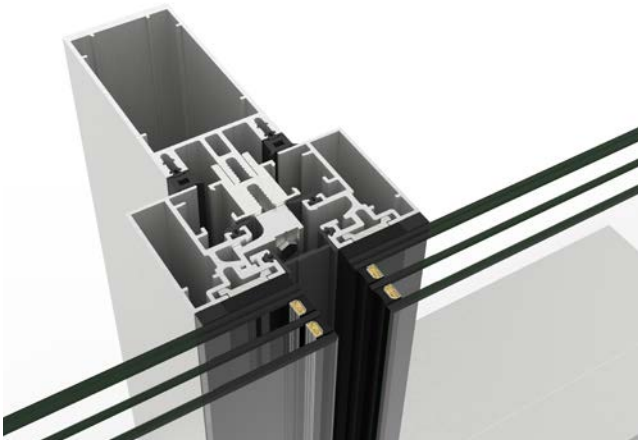

Glazing

Max. 38 mm, Min. 6 mm

Sightlines

Mullion 52 mm

Transom 52 mm

Profile Thickness

Mullion 2,1 and 3,0 mm

Transom 2,1 mm

Maximum Weight

180 kg Top hung opening

350 Kg Fixed lights

Minimum / Maximum opening dimensions

Top Hung Opening


Max. width (L) 2500 mm, Min. width (L) 500 mm

Max. height (H) 2500 mm, Min. height (H) 650 mm

FEATURES

Transmittance		Ucw ≥ 0,7 (W/m²K)
Air permeability		Class AE
Watertightness		Class RE750
Wind resistance *		Passed

Reference test 3,00 x 3,50 m  
Certification CWCT British Standard  
\* Design loading 2000 Pa-Security loading 3000 Pa

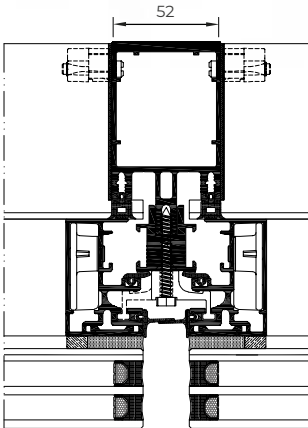

Façades




SST 52  
FAÇADE

The glass is mechanically fixed to the aluminium frame with an external embellishing profile without the need of structural silicone as is the case in the TP 52 system. It also has an open groove external aesthetic, in this case by covering the glass with aluminium. The EPDM gasket is installed in the perimeter of each module, acting as a Watertightness first line of defence. An overlap closes the space between the gaskets.

FEATURES

Transmittance		Ucw ≥ 0,8 (W/m²K)
Air permeability		Class AE
Watertightness		Class RE750
Wind resistance *		Passed

Reference test 3,00 x 3,50 m  
Certification CWCT British Standard  
\* Design loading 1200 Pa-Security loading 1800 Pa

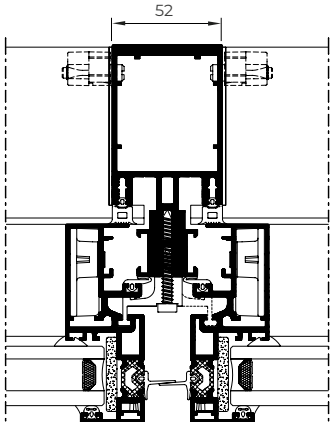

Glazing

Max. 28 mm, Min. 6 mm

Sightlines

Mullion 52 mm

Transom 52 mm

Thermal Break Zone

18 mm

Profile Thickness

Mullion 2,1 and 3,0 mm

Transom 2,1 mm

Maximum Weight

180 kg Top hung opening

350 Kg Fixed lights



Minimum / Maximum opening dimensions

Max. width (L) 2500 mm, Min. width (L) 500 mm

Max. height (H) 2500 mm, Min. height (H) 650 mm

OPENING POSSIBILITIES



Outward Opening  
Hidden Top Hung

Façades





ST 52 FAÇADE



SST 52 FAÇADE






## EQUITY FAÇADE

This system is characterised by a slim and minimalistic aesthetic with an interlock profile of only 18 mm both in mullions and transoms, which are also the same depth. This creates a flush mounting that provides the façade a uniform aesthetic. The glazing of this curtain wall is compatible with the TP 52, TPH 52, TPV 52 and SG 52 series.

Transmittance   $U_{cw} \geq 0.6 \text{ (W/m}^2\text{K)}$

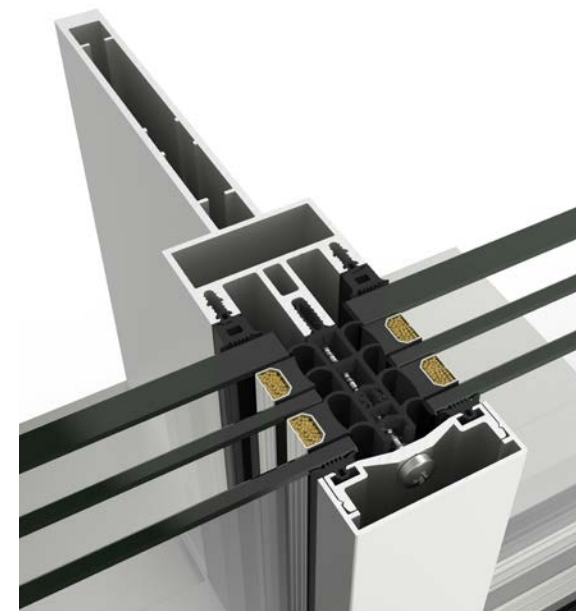

### Glazing

Max. 64 mm, Min. 4 mm

### Sightlines

Mullion 18 mm

Transom 18 mm

### Profile Thickness

2.6 mm (Mullion and Transom)

### Covers

Flat cover


85 mm deep elliptical cover

H shape cover, 34 mm deep

Rectangular cover: 14, 19 100 & 145 mm deep

Pyramid shape cover, 155 mm deep

6, 12 & 30 mm stackable thermal break profiles

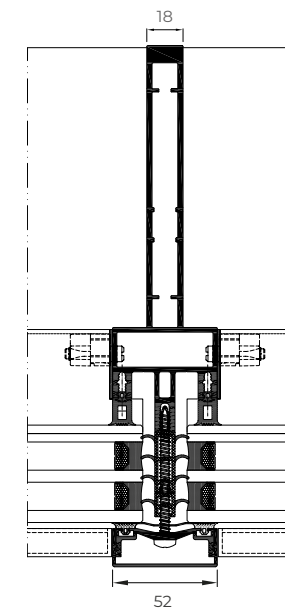




# VERANDA

Gable or hipped roofing system comprised of flush mullions and transoms for 1st, 2nd, and 3rd level that allow for different drainage levels, guaranteeing perfect outflow of water, ventilation and Watertightness.

Possibility of motorized top hung opening in roof areas.

This skylight system allows for an easy integration of our veranda systems, our hinged windows or our sliding window/door systems.

## OPENING POSSIBILITIES



## FEATURES


Transmittance		Ucw ≥ 0,6 (W/m²K)
Air permeability		Class AE
Watertightness		Class RE1350
Wind resistance *		Passed

Reference test 3,00 x 3,50 m  
\* Design loading 1200 Pa-Security loading 1800 Pa

## PROJECTING OPENING TEST

Air permeability		Class 4
Watertightness		Class E2100
Wind resistance		Class C5

Window reference test 1,23 x 1,14 mm / 1 sash

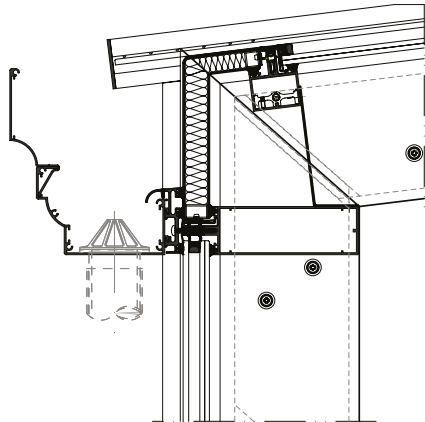

**Sightlines**  
Mullion 52 mm  
Transom 52 mm

**Profile Thickness**  
2,1 & 3,0 mm  
2,1 mm

**Glazing**  
Fixed lights:  
Max. 38 mm, Min. 26 mm  
Window roof:  
Max. 38 mm, Min. 24 mm

**Minimum incline/slope Pt:** 12% (7°)  
**Maximum incline/slope Pt:** 85% (40°)

Skylight  
Veranda





## VERANDA



# SLIDING ROOF

Sliding and automatic enclosure system that allows the opening and closing of a roofed area, allowing to enjoy the fresh air or a roofed space depending on the circumstances. This solution grants a 66% maximum opening of the span, featuring, in addition, a notable thermal and acoustic comfort thanks to its glazing capacity of 24 mm and the installation of solar control glass. CORTIZO's Sliding Roof is equipped with a series of complementary profiles that adjust the enclosure's water collection and drainage, thus guaranteeing the system's maximum Watertightness.

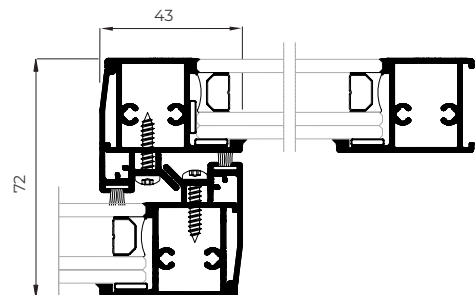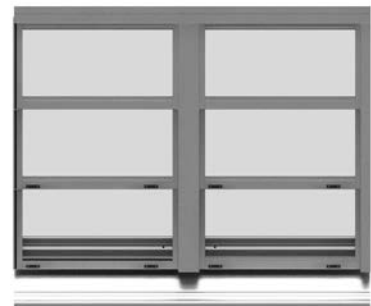

- Sightlines**  
Frame 133 mm  
Sash 28 mm
- Profile Thickness**  
Sashes 1,5 mm
- Glazing**  
Cellular polycarbonate 25 mm  
Sandwich panel 24 mm  
Glass 24 mm (4 tempered / 12 / 4+4)
- Maximum Sash Dimensions**  
Width (L)  
2300 mm (polycarbonate and sandwich panel)  
1200 mm (glass)  
Height (H) 1600 mm
- Maximum Sash Weight:**  
75 Kg

## OPENING POSSIBILITIES

▽	▽	▽	▽
▽	▽	▽	▽

Outward Opening  
2 sashes and 1 fixed module and multiple falls

- Maximum Span Opening:** 66%
- Incline/Slope:** 8,5% (15°)
- Roof Distance**  
Max. 4800 mm, Min. 3100 mm
- Roof Width**  
Unlimited when joining modules
- Motorised sash opening**

**Roof system watertightness test: Class APT**  
During the 6 hr. test, end of test and 24 hrs. following the same, no drips or humidity were detected in the enclosed area  
Reference test: 4300 x 4160 mm in 3 adjustable rows, 9 sashes and 4 / 12 / 4+4 glass

Sliding  
Roof



## SLIDING ROOF





contemporary  
enclosures







**smoke and fire protection** systems

## Millennium FR


### DOOR

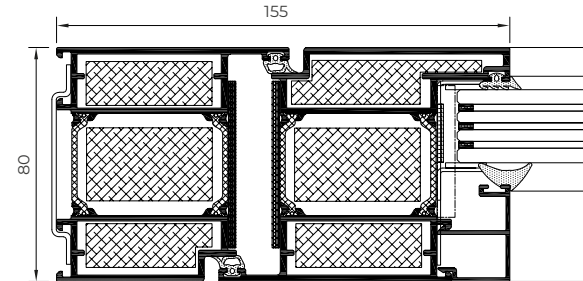Aluminium fire door system with fire resistance category EI<sub>2</sub>60 in order to meet safety requirements in the event of fire, allowing the compartmentalisation by building areas and facilitating the evacuation of the users. It offers a fire resistance period of 60 minutes thanks to the use of non-combustible retardant insulation materials in the profile chambers and intumescent gaskets.




FEATURES		
Transmittance		Uw ≥ 1.4 (W/m²K)
Acoustic insulation		Rw up to 38 dB
Fire resistance and smoke control		Class EI <sub>2</sub> 60-C5

Classification according to standard UNE-EN 13501-2+AI (C5=200.000 test cycles)  
Reference test 1.35 x 2.35 m / 1 sash. Class EI60 single glazed 23 to 25 mm.

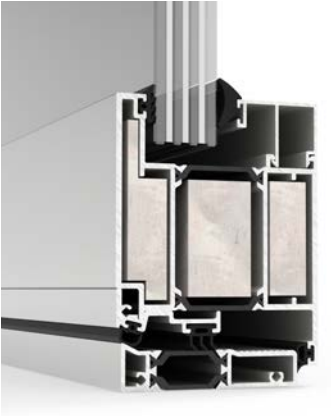

- Sightlines**  
Frame 80 mm, Sash 80 mm
- Polyamide Strip Length**  
35 mm
- Profile Thickness**  
Door 2.2 mm
- Glazing**  
Max. 48 mm, Min. 15 mm
- Maximum Sash Dimensions**  
Width (L) 1450 mm, Height (H) 2600 mm
- Maximum Sash Weight**  
240 kg
- Consult maximum weight and dimensions according to typologies

OPENING POSSIBILITIES



Inward opening

Side hung

Outward Opening

Side hung

SHEV

Smoke and fire  
protection



The new SHEV system consists of a structure formed by an enclosure and an integrated motor which facilitates opening and closing. This motor is activated whenever there is a fire so as to enable the natural evacuation of heat and smoke upwardly. Its functions are to improve visibility and reduce the heat in the building, thus decreasing the risk of asphyxiation due to smoke inhalation and facilitating the evacuation of the people inside.

FEATURES		
Transmittance		Uw ≥ 0,9 (W/m²K)
Acoustic insulation		Rw up to 44 dB
Reliability		Class Re1000
Opening under snow load		SL 60
Performance at low temperature		T(-5)
Wind load		WL 1200
Resistance to heat		B 300
Aerodynamic free area		According to calculation

Report N° 19-001796-PR15 (PP-A04-03-en-01)

Glazing

Max. 65 mm\*

(\*Depending on the system and glass)

Maximum Sash Dimensions

Veranda:

Width (L) 2500 mm

Height (H) 2500 mm

Top hung:

Width (L) 2400 mm

Height (H) 2400 mm

Maximum Sash Weight


Veranda: 150 kg

Top hung: 165 kg

Consult maximum weight and dimensions according to typologies




Smoke and fire  
protection

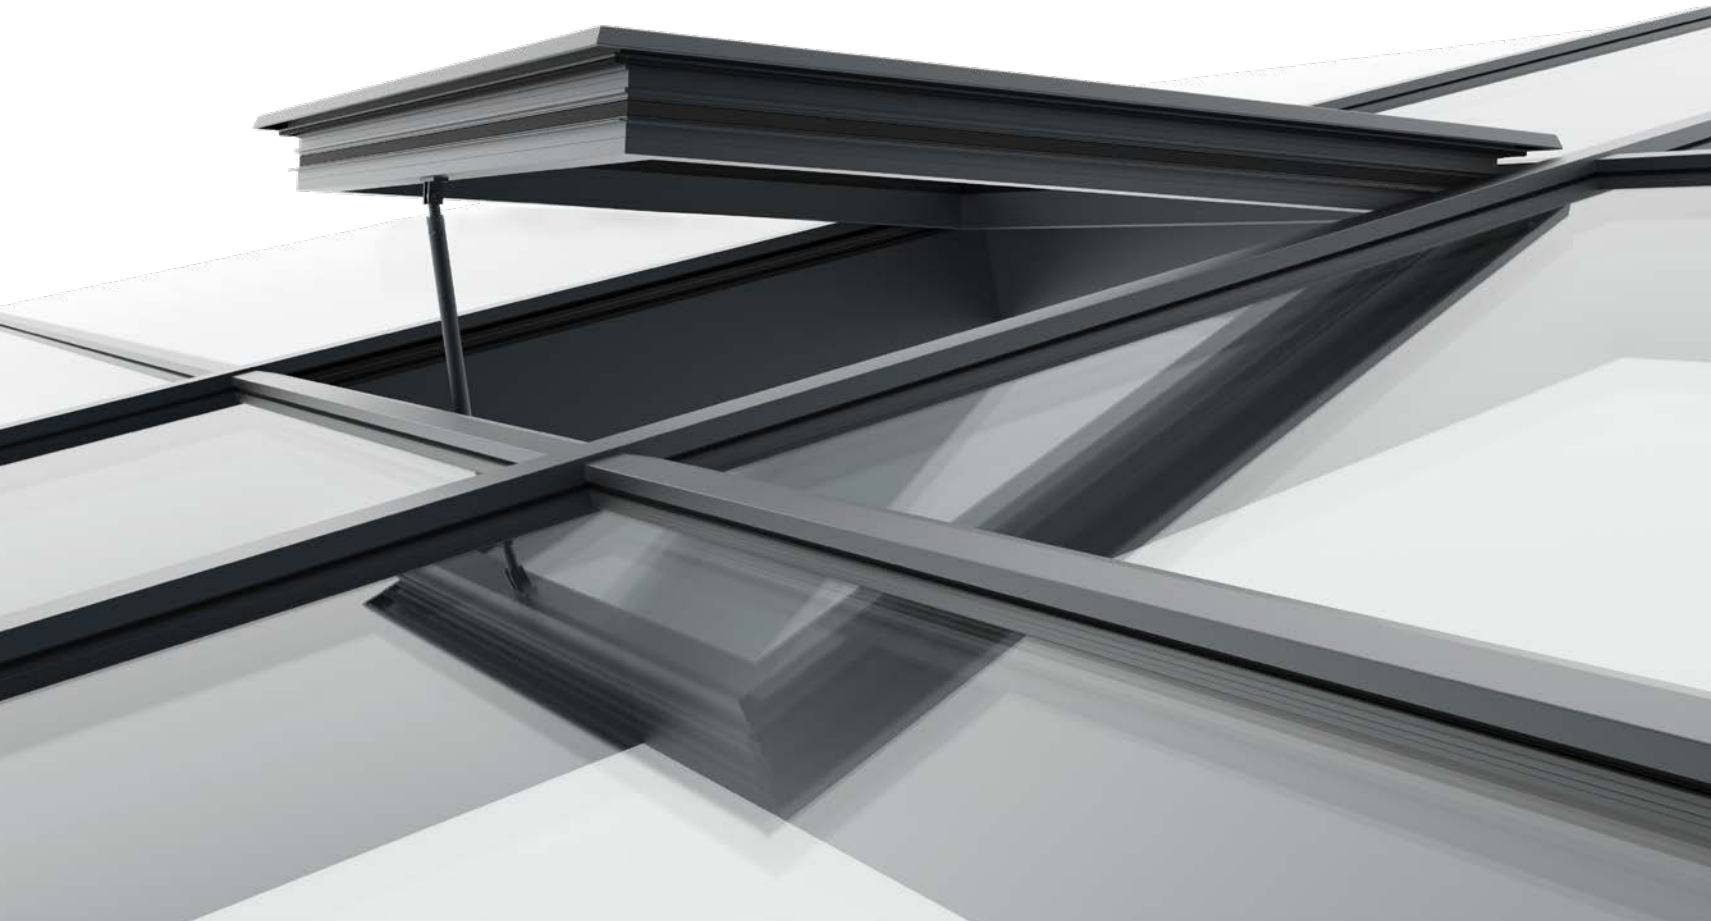

MOTORISED OPENING  
POSSIBILITIES

Outward opening  
Top hung

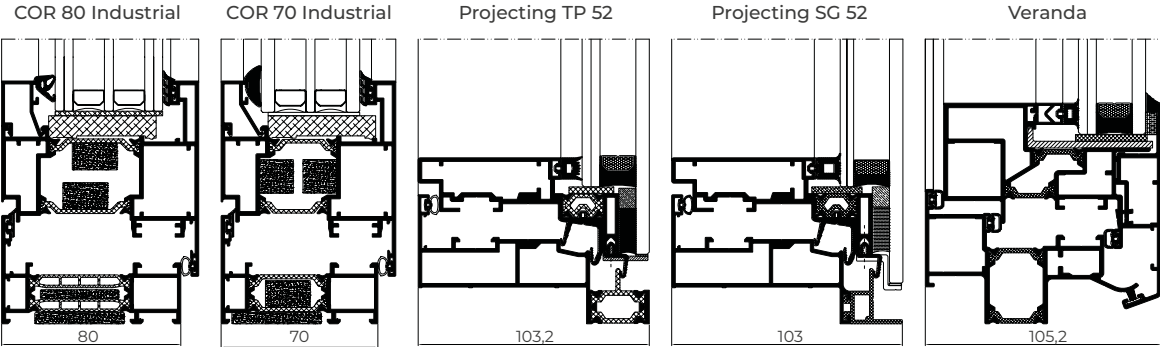



contemporary  
enclosures




**claddings** systems

# CLADDING PRO

Transform your building with Cladding Pro, the modular and versatile aluminium cladding system that adapts to the needs of any architectural project. Its innovative design with clipped profiles and straight caps of various dimensions provides a modern and minimalist aesthetic, while ensuring quick and easy.

POSSIBILITY OF  
FOILED PROFILES

## MODEL 1

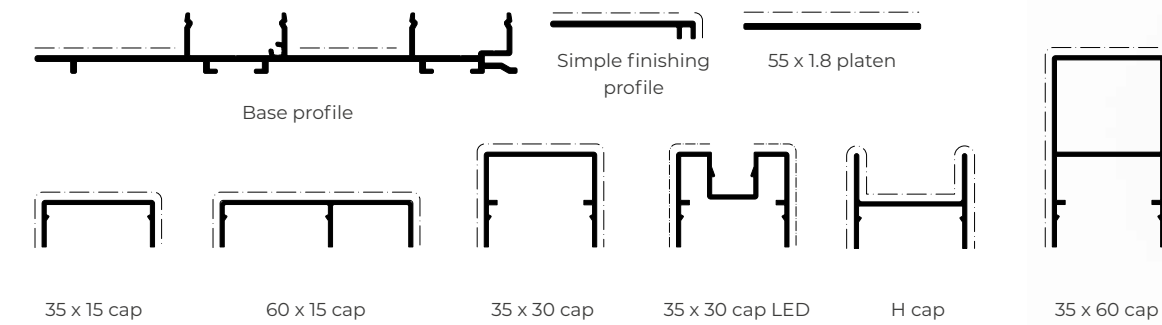


CLADDING PRO

Claddings



MODEL 2

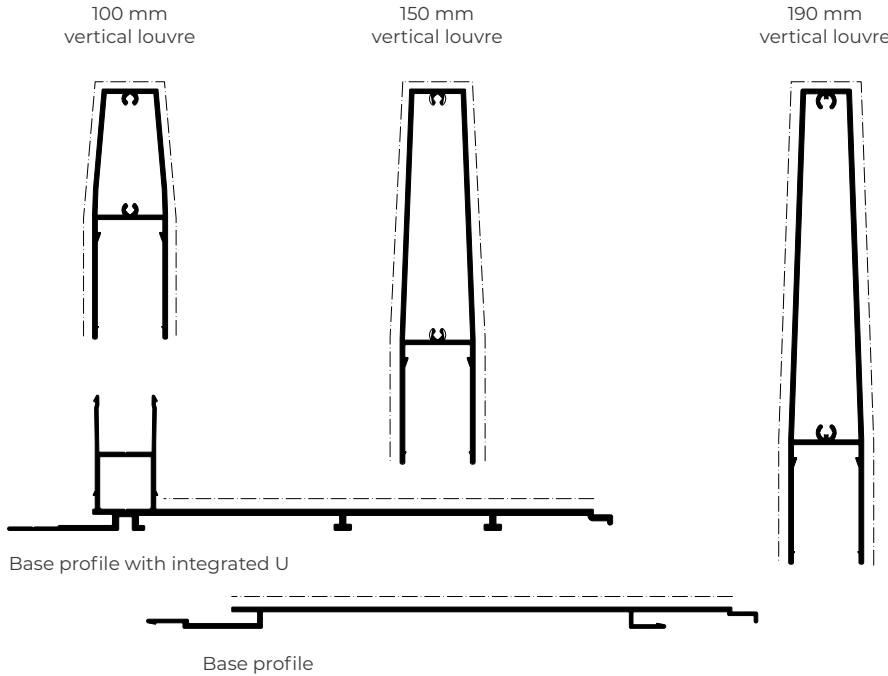

POSSIBILITY OF  
FOILED PROFILES



contemporary  
enclosures



interior divisions systems





PW80 OFFICE PARTITION WALL

## PW 80

### Office Partition Wall


Designed to divide interior spaces, available in glass and panel version.  
This solution allows the integration of side hung doors and venetian blinds.

#### FEATURES

Acoustic insulation  Rw up to 48 dB

Mechanical Performance  Category IV

Category IV reference test according to section 2.2.6 of EAD 210005-00-0505

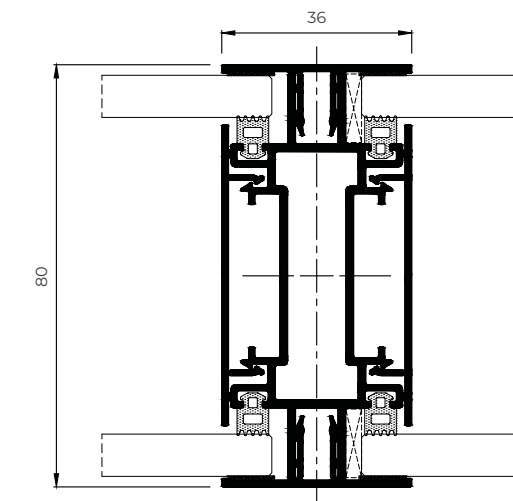

#### Sections

80 mm (mullion)

#### Profile thickness

1,5 mm (mullion)

#### Sightlines

12 / 24 / 36 mm

#### Panel

10 - 20 mm

#### Glazing

6+6, 8+8, 10+10, 12+12 mm

#### Máx. weigh


40 kg

#### Opening possibilities

8 and 10 mm Glass side hung door

40 mm Panel side hung door

Consult maximum weight and dimensions according to typologies

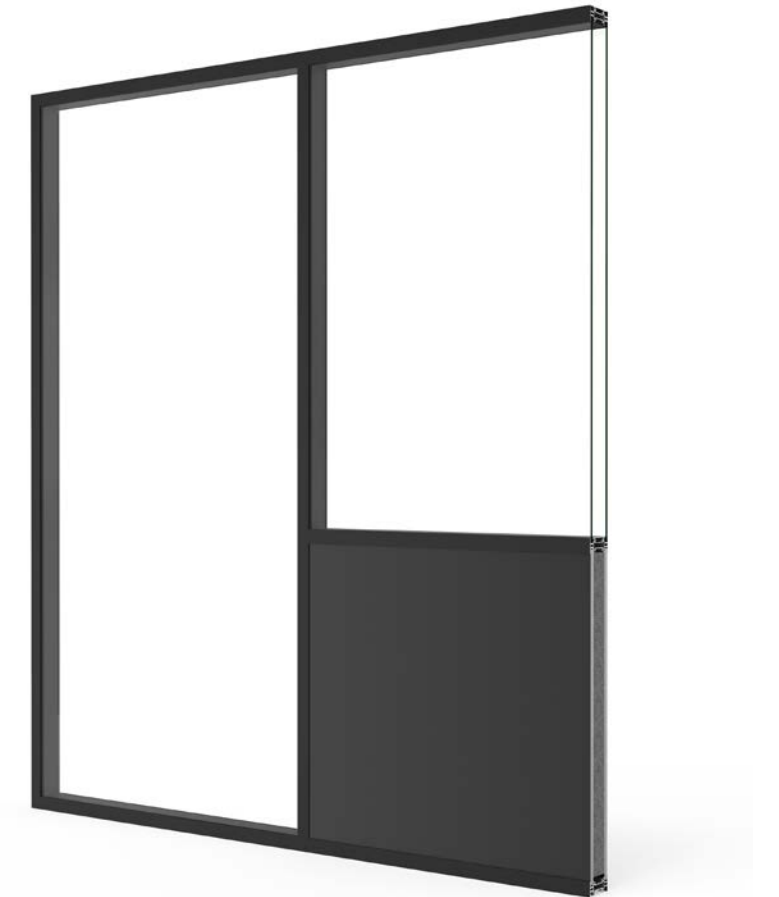


contemporary  
enclosures



**solar protection** systems

# SOLAR PROTECTION LOUVRES

Efficient solution for solar ray incidence control in the building's interior temperature. Solar radiation is absorbed and reflected by these external louvres, facilitating energy efficiency and decreasing the need for artificial refrigeration. In addition, they serve as a decorative element bringing an avant-garde aesthetic to the façade.

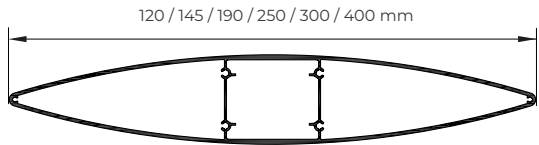

## Louvre type

Fixed: Regulation 0°, 15°, 30° or 45°.  
Adjustable: Motorized and manual.

Louvre size	Max recommended length to fixed louvres	Maximum recommended length to adjustable louvres
120 mm	1,8 metres	
145 mm	2,2 metres	1,9 metres
190 mm	2,5 metres	2,4 metres
250 mm	3,0 metres	3,0 metres
300 mm	3,5 metres	3,4 metres
400 mm	4,2 metres	4,0 metres

Depending on project specifications a larger free louvre length will be attainable (Consult)



## Profile Thickness

Louvres	Thickness
120 mm	1,25 mm
145 mm	1,35 mm
190 mm	1,70 mm
250 mm	1,90 mm
300 mm	2,00 mm
400 mm	2,50 mm



## Wind load resistance

Class 6 (max.)

Reference test

Louvres	Length
120 mm	1,8 metres
145 mm	2,0 metres
190 mm	2,5 metres
250 mm	3,0 metres
300 mm	3,5 metres
400 mm	4,2 metres


Test carried out according UNE 1932

Solar  
Protection



# LATTICES DECORATIVE LOUVRES

Extruded aluminium slats designed to configure a double skin in external enclosures that allow to sieve the light facilitating air circulation.

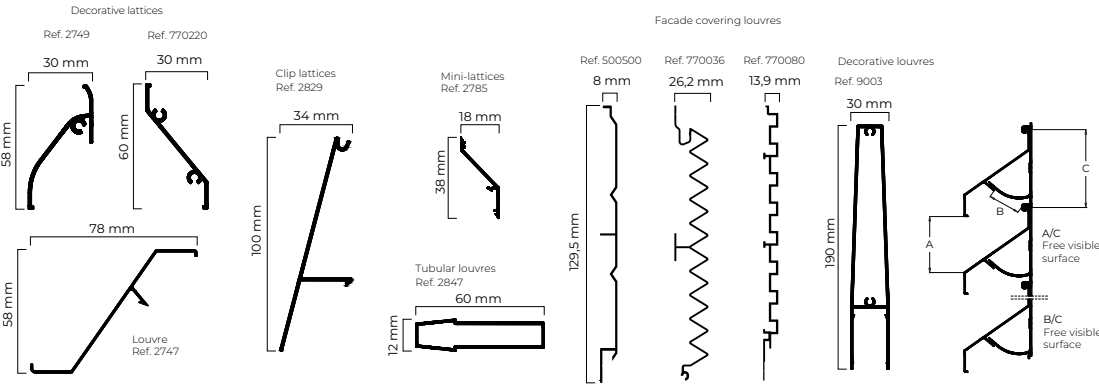

## Wind load resistance

**Lattice: UNE 13659 Class 6 (max.)**

test reference 2.0 metres

**Mini-lattice: UNE 13659 Class 5**

Test reference 1.3 metres

**Tubular louvres: UNE 13659 Class 6 (max.)**

Test reference 1.3 metres

Test carried out according to -UNE 1932

Louvre type	Max. recommended free length	A/C	B/C
Lattices (Ref. 2747)	2,0 metres	71%	44%
Decorative lattices (Ref. 2749)	1,5 metres	62%	34%
Clip lattices (Ref. 2829)	2,0 metres	100%	24%
Mini-lattices (Ref. 2785)	1,3 metres	55%	39%
Tubular louvres (Ref. 2847)	2,0 metres	76%	-
Decorative louvres (Ref. 9003)	1,0 metres	86%	-
Façade covering louvres (Ref. 500500)	-	-	-
Façade covering louvres (Ref. 770036)	-	-	-
Façade covering louvres (Ref. 770080)	-	-	-



Solar  
Protection









SOLAR PROTECTION **LOUVRES**






TAMIZ

Side hung, sliding or bifold shutter system with fixed or adjustable louvres.

FEATURES	
Thermal resistance of the shutter and the thermal chamber	 ΔR= 0,08 (m²K/W)
Wind resistance	 Class 5

Reference test 1,50 x 1,50 m / 2 sashes

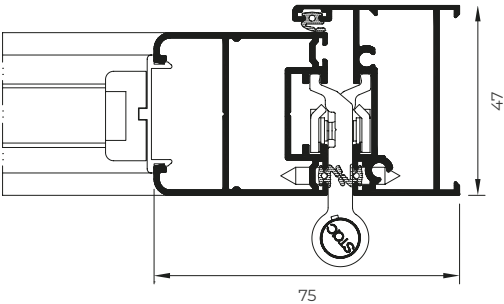

Sightlines

Frame 47 mm

Sash 40 mm

Profile Thickness

Window 1,3 mm

Door 1,5 mm

Maximum Sash Weight

Side hung 65 kg

Bifold 50 kg

Sliding 120 kg

Maximum Sash Dimensions

Side hung:

Width (L) 1200 mm, Height (H) 2500 mm

Bifold:

Width (L) 700 mm, Height (H) 2500 mm

Sliding:

Width (L) 2000 mm, Height (H) 3500 mm

Transmittance

Uw window transmittance  
Uws transmittance of the window-shutter system

Uw(W/m²K)	Uws(W/m²K)
0,8	0,75
1,0	0,93
1,2	1,09
1,4	1,26
1,6	1,42
1,8	1,57
2,0	1,72
2,2	1,87
2,4	2,01
2,6	2,15
2,8	2,29
3,0	2,42
3,2	2,55




Closing possibilities

Closing with fixed or adjustable louvres

Opaque closing (sandwich panel)

Glazed closing

OPENING POSSIBILITIES





Solar  
Protection



MALLORQUINA


Side hung shutter system with fixed or adjustable louvres

FEATURES	
Thermal resistance of the shutter and the thermal chamber	 ΔR = 0,08 (m²K/W)
Wind resistance	 Class 5

Reference test 1,50 x 1,50 m / 2 sashes

Uw(W/m²K)	Uws(W/m²K)
0,8	0,75
1,0	0,93
1,2	1,09
1,4	1,26
1,6	1,42
1,8	1,57
2,0	1,72
2,2	1,87
2,4	2,01
2,6	2,15
2,8	2,29
3,0	2,42
3,2	2,55

Uw window transmittance  
Uws transmittance of the window-shutter system

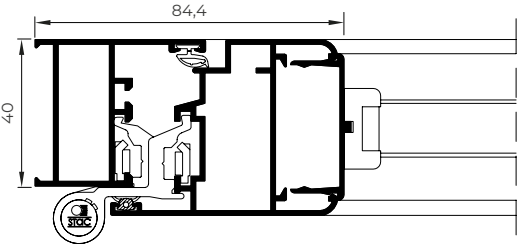

OPENING POSSIBILITIES



Side hung of 1, 2, 3 and 4 sashes

Sightlines

Frame 40 mm

Sash 48 mm

Profile Thickness

Window 1,3 mm

Door 1,4 mm

Maximum Sash Weight

75 Kg

Maximum Sash Dimensions

Width (L) 1500 mm

Height (H) 2400 mm



Solar  
Protection







contemporary  
enclosures




**balustrading** systems

# BALUSTRADE

## View Crystal / View Crystal Plus

Enjoy excellent views without any visual obstacle thanks to this balustrade system based on a “U” shaped aluminium profile on which laminated safety glass is fixed. Possibility of led strip illumination and drainage solution for exposed areas. Option of aluminium embellishing profile on the upper edge.

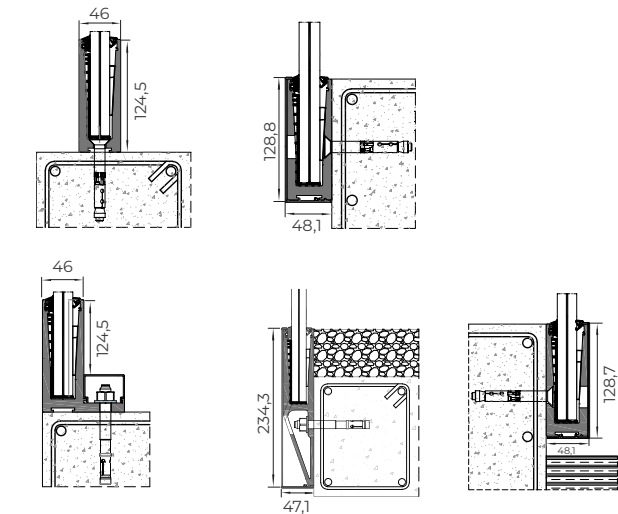

LAMINATED GLASS COMPOSITIONS			
10-1,52-10	10-1,14-10	10-0,76-10	10-0,38-10
8-1,52-8	8-1,14-8	8-0,76-8	8-0,38-8
6-1,52-6	6-1,14-6	6-0,76-6	6-0,38-6

**VIEW CRYSTAL:** Resists a load of 1,0 kN/m applied at 1,1 metres from its bottom part. Suitable for use in areas A1, A2, B, C1, C2, D1, D2, G1 and G2, included in the CTE DB SE-AE, and A, B, C1, C2, C3, C4, D and E, in accordance with Eurocode 1.

**VIEW CRYSTAL PLUS:** Resists a load of 3,0 kN/m. Suitable for use in all areas from CTE DB SE-AE and areas A, B, C1, C2, C3, C4, C5, D and E, in accordance with Eurocode 1.



### Assembly Possibilities

- Over slab
- Flush over slab
- Edge slab
- Inverted edge slab
- Flush with the slab
- Flush with the pavement

### Maximum Height

1100 mm

Tests according to standards UNE 85237, UNE 85238 and UNE 85240. Established requirements in CTE (DB SU-1 and DB SE-AE) And established requirements in Eurocode 1 according to EN 1991-1-1/AC

- Static horizontal test towards the exterior
- Static horizontal test towards the interior
- Dynamic test with mild object
- Dynamic test with hard object
- Verification of section 3.2 of DB-SE-AE of CTE
- Verification of the specifications of the Eurocode 1 according to table 6.12 for use categories of 3kN/m

### Clasification according to UNE 85240, Class A-Excellent

- Reference test on balustrade with glass and extruded aluminium, fixed to the slab edge with (H) 1100 X (L) 1500 mm of total dimensions above ground level
- Reference test on balustrade with glass and extruded aluminium, fixed over the slab with (H) 1100 X (L) 1500 mm of total dimensions above ground level.

Balustrades



### VIEW CRYSTAL BALUSTRADE




# BALUSTRADE

## Classic

Traditional balustrade system with bar or glass aspect.  
Possibility of fixing to slab or to the edge of the slab.

Balustrades

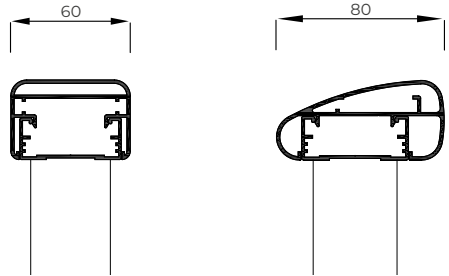

### Possibilities

- Glass balustrading
- Glass balustrading with free top edge
- Bar balustrading
- Bar balustrading with free top edge

### Handrail Possibilities

- Square - 60 mm width
- Circular - 66 mm diameter
- Elliptical - 80 mm external perimeter

### Maximum Dimensions Between Pilasters

1000 mm

### Minimum Height

900 mm

### Clasification according to UNE 85240, Class A-Excellent

Reference test on glass balustrading at a total height of (H) 1100 x (L) 2450 mm and 3 pilasters.  
Reference test on bar balustrading with top free edge of (H) 1100 x (L) 2000 mm and 3 pilasters.

Tests according to standards UNE 85237, UNE 85238 and UNE 85210.

Requirements established in CTE (DB SU-1 and DB SE-AE)

Static horizontal test towards the exterior  
Static horizontal test towards the interior  
Static vertical test  
Dynamic test with mild object  
Dynamic test with hard object  
Verification of section 3.2 of DB-SE-AE of CTE  
Security test

## CLASSIC BALUSTRADE






JULIET

Balcony

Balustrading solution for installation on the exterior of the carpentry by means of concealed fixings, allowing for the total opening of balconies without the risk of falling.

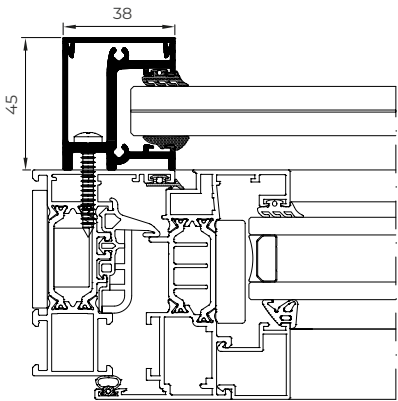

**Classification according to UNE 85240, Class A-Excellent**  
Reference test on glass and extruded aluminium balustrade of (H) 1200 x (L) 1800 mm.

**Tests according to standards UNE 85237, UNE 85238 and UNE 85240.**  
**Requirements established in CTE (DB SU-1 AND DB SE-AE) and in Eurocode 1 according to EN 1991-1-1 for use category of up to 1,6 kN/m.**

Static horizontal test towards the exterior.  
Static horizontal test towards the interior.  
Static vertical test.  
Dynamic test with mild object.  
Dynamic test with hard object.  
Verification of section 3.2 of DB SE-AE of CTE.  
Security test.

LAMINATED GLASS  
COMPOSITIONS

8-1,52-8	6-1,52-6
8-1,14-8	6-1,14-6
8-0,76-8	6-0,76-6
8-0,38-8	6-0,38-6

Balustrades



**Maximum width**  
1800 mm



JULIET  
BALCONY

contemporary  
enclosures



**accessories**



## STYLISH HANDLE

---

The new Stylish handle presents a simple **design**, with more accentuated lines and **stylish aesthetics for dressing in style** the CORTIZO windows, balconies and doors.

### WINDOW HANDLE



### OFFSET HANDLE



### HANDLE WITH KEY





### DOOR HANDLE



Design with slim backplate  
Version for external, internal and PVC assembly  
Available in window and door version  
Quick setting-up  
Available in the full powder-coating range



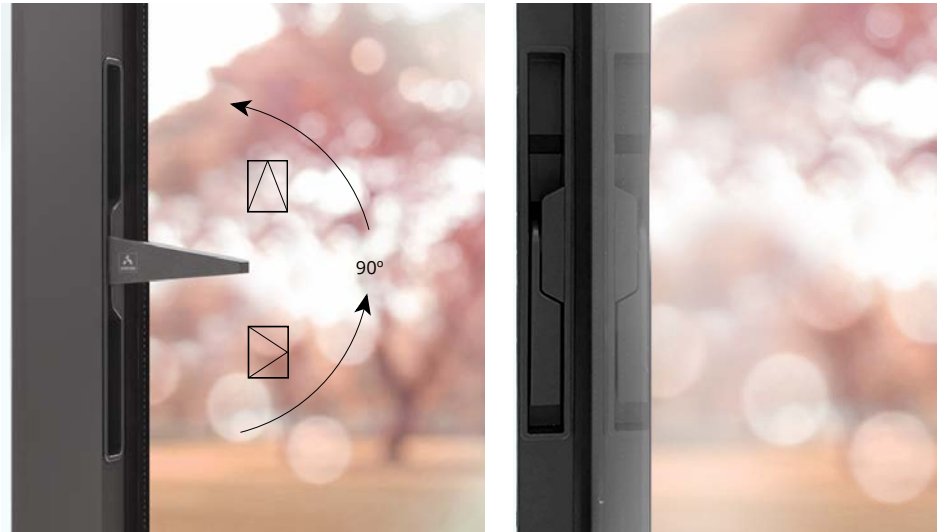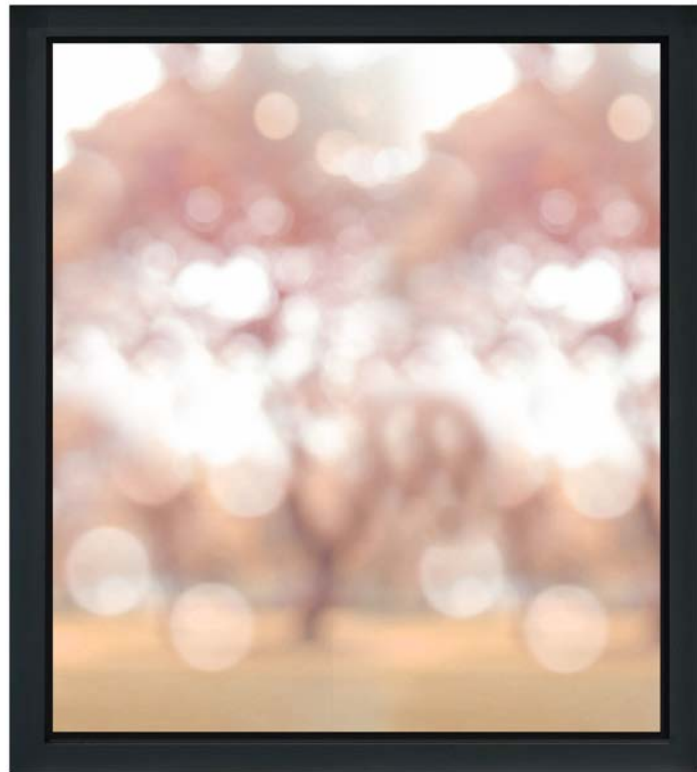

## ARCH INVISIBLE HANDLE

Exclusive handle integrated within the sash, imperceptible from the frontal view

Compatible with the COR 80 Hidden Sash and COR 70 Hidden Sash systems  
Ergonomics, robustness and easy handling in the opening and closing operations  
Ideal for combination with concealed hinges, achieving a totally clean aesthetic  
Dimensions 27.5 x 234 mm



## CORTIZO MINIMALIST HANDLE

Simple lines, avant-garde design

Straight aesthetic  
Design without escutcheon

Applicable to all European-Groove hinged series,  
C16 series and PVC

Specific transmission box (In European-Groove)  
Hidden screws

8 mm spindle (In European-Groove)  
Dimensions 32 x 148 mm



## CORTIZO HANDLE

Reduced escutcheon design  
Adaptability to transmission box and multilock system  
Concealed hardware  
Spindle: 7 mm  
Dimensions 32 x 148 mm



## CORTIZO DOOR HANDLE

Reduced escutcheon design  
Opening to the right and to the left versions  
Suitable for exterior and interior assembly  
Available in door version  
Concealed hardware  
Spindle: 8 mm  
Dimensions 32 x 148 mm



## INOX HANDLE

Reduced escutcheon design  
Adaptability to transmission box and multilock system  
Available in door version  
Concealed hardware  
Spindle: 7 mm  
Dimensions: 31 x 135 mm



#### SIRIUS HANDLE

Curved aesthetics  
Design with a reduced escutcheon  
Suitable for multipoint lock  
Available for windows or doors  
Spindle: 7 mm  
Dimensions: 32 x 155 mm



#### CORTIZO CREMONE WITH KEY

Maximum security  
3 locking positions: full lock,  
Bottom hung and tilt and  
turn  
Dimensions: 33 x 190 mm



#### REMOVABLE CORTIZO CREMONE

Easy assembly  
Handle clipped on the escutcheon  
Possibility of removing the handle  
in any position  
Maximum durability  
Dimensions: 33 x 173 mm



#### ART INFINITY PULL HANDLE

Suitable for high traffic  
and large dimension doors  
Straight or curved design  
Dimensions: 450 x 50 mm



#### LIFT & SLIDE HANDLE

Avant-garde aesthetic  
Exclusive to systems  
4600 and 4700 Lift & Slide  
Versions with or without key  
Multiple combinations:  
handle / handle  
handle / finger pull  
Tested to 25,000 cycles  
Spindle of 10 mm  
Dimensions: 37 x 290 mm



#### CORTIZO OFFSET HANDLE

Handle specially designed  
for sliding systems  
Reduced escutcheon  
Suitable for exterior and interior  
Spindle: 7 mm  
Dimensions: 32 x 158 mm



#### VISION SECURITY LOCK

Key lockable  
Integration of the locking  
system in the profile with  
minimalist aesthetics  
Up to 4 locking points  
Dimensions: 36 x 260 mm



#### FLUSH VISION SECURITY LOCK

Key lockable  
Lock flush with the profile  
Up to 4 locking points  
Dimensions: 36 x 260 mm



#### VISION SECURITY MINI LOCK

Straight aesthetics in line  
with the minimalist style  
of the system  
Dimensions: 26 x 92 mm



#### VISION CENTRAL LOCK

Suitable for the COR VISION and  
COR VISION PLUS systems  
Integrated in the interlock profile  
It allows to conceal the  
lateral sashes  
Dimensions: 450 x 50 mm





#### CORTIZO HD HARDWARE

Hinge specially designed for large dimensions  
such as floor to ceiling solutions

3D regulation

Maximum dimensions: 1200 x 3500 mm\*

Maximum weight/sash: 160 Kg

\* For window configurations of large dimensions and weight,  
consult with the Cortizo Architecture and Engineering Department.



### SPECIAL HARDWARES



#### EVO SOFT HARDWARE

3D regulation. All locking points are adjustable

Closing force up to 50% less than  
traditional hardware

Possibility of multiple locking points

All sliding elements incorporate a clip to  
eliminate unnecessary gaps

Maximum weight/sash: 120 Kg

For window configurations of large dimensions  
and weight, consult with the Cortizo  
Architecture and Engineering Department



#### EVO SOFT CLX 160 KG HARDWARE

3D regulation. All locking points are adjustable

Closing force up to 50% less than traditional  
hardware

Possibility of multiple locking points

All sliding elements incorporate a clip to eliminate  
unnecessary gaps

Maximum weight/sash: 160 Kg

For window configurations of large dimensions  
and weight, consult with the Cortizo  
Architecture and Engineering Department



#### EVO SECURITY HARDWARE

High security hardware

Mushroom security cams with tightness  
adjustment and anti-theft locks

protection against breakage and robbery

Possibility of up to 14 locking points



